

VERMONT TAP & DIE



Taps, Tap Sets

VERMONT TAP & DIE



Table of Contents

Taps	1 - 34
Dies	35
Accessories	36
Technical Information	37-52
Index by Order Number	53-56

THE VERMONT TAP & DIE TRADITION

At VTD we maintain a tradition of high quality in our products and services. This Vermont Tap & Die product catalog continues that tradition, bringing you the finest taps and dies for industrial applications.

QUICK DELIVERY

For quick delivery of non-standard product, inquire about our *Fast Tap* service. VTD can custom engineer and manufacture specials to your specifications in the same time it takes other companies to select "ready made" specials off the shelf, finish and ship. VTD has the unique capability of manufacturing a special tap and custom-coating it with our VERTANIUM® or other high-performance coatings.

Style Number Index

Style Number	Page Number	Style Number	Page Number	Style Number	Page Number
280	35	3112-M	24	TN-1986	30-31
290	35	3112-MHD	26	TN-1986-M	31
1986	30-31	3180	32	TN-3105	11-14
1986-M	31	3180-E	32	TN-3105-CH	21
2290	35	3181	34	TN-3105-M	16
3105	11-14	3181-D	34	TN-3105-M-Sets	17
3105-CI	18-19	3182	33	TN-3105-SETS	14-15
3105-CIM	19	3183	33	TN-3112	22-24
3105-E	18	3705-HDCI	10	TN-3112-HD	25-26
3105-H	17	3712-HM	8	TN-3112-M	24
3105-H SETS	17	3712-SM	6	TN-3180	32
3105-L	20	5150	27	TN-3180-E	32
3105-L SETS	20	5155	27-28	TN-3182	33
3105-M	16	5155-M	28	TN-3712-AR	5
3105-M-Sets	17	5750-HM	9	TN-3712-SM	6
3105-SETS	14-15	5750-SM	7	TN-5150	27
3112	22-24	S-3183	33	TN-5155	27-28
3112-E	25	TCN-3712-HM	8	TN-5155-HD	29
3112-HD	25-26	TCN-5750-HM	9	TN-5750-SM	7

Customer Service

Telephone: 800.348.2885 Fax: 800.892.4290



Description	Style Number	Page
Vermont Tap List Number Codes		3
High Performance Taps		
HP-CNC Introduction		4
VERTANIUM® HP-CNC AERO Spiral Pointed Taps	TN-3712-AR	5
HP-CNC Spiral Point Taps - Soft Metals & Stainless	3712-SM	6
VERTANIUM® HP-CNC Spiral Point Taps - Soft Metals & Stainless	TN-3712-SM	6
HP-CNC Spiral Fluted Taps - Soft Metals & Stainless	5750-SM	7
VERTANIUM® HP-CNC Spiral Fluted Taps - Soft Metals & Stainless	TN-5750-SM	7
HP-CNC Spiral Point Taps - Hard Metals	3712-HM	8
TiCN HP-CNC Spiral Point Taps - Hard Metals	TCN-3712-HM	8
HP-CNC Spiral Fluted Taps - Hard Metals	5750-HM	9
TiCN HP-CNC Spiral Fluted Taps - Hard Metals	TCN-5750-HM	9
HP-CNC Straight Fluted Hand Taps - Cast Iron	3705-HDCI	10
Hand Taps		
Straight Fluted Hand Taps	3105	11-14
VERTANIUM® Straight Fluted Hand Taps	TN-3105	11-14
Straight Fluted Hand Tap Sets	3105-SETS	14-15
VERTANIUM® Straight Fluted Hand Taps Sets	TN-3105-SETS	14-15
Straight Fluted Hand Taps - Metric	3105-M	16
VERTANIUM® Straight Fluted Hand Taps - Metric	TN-3105-M	16
Straight Fluted Hand Tap Sets - Metric	3105-M-Sets	17
VERTANIUM® Metric Sets	TN-3105-M-Sets	17
Eight Pitch Straight Fluted Hand Taps	3105-H	17
Eight Pitch Straight Fluted Hand Taps Sets	3105-H SETS	17
6" Extension Straight Fluted Hand Taps	3105-E	18
Straight Fluted Hand Taps for Cast Iron	3105-CI	18-19
Straight Fluted Hand Taps for Cast Iron - Metric	3105-CIM	19
Left Hand Straight Fluted Hand Taps	3105-L	20
Left Hand Straight Fluted Hand Taps Sets	3105-L SETS	20
VERTANIUM® Coated CNC Coolant Hole Straight Flute Taps	TN-3105-CH	21
Spiral Pointed Taps		
Spiral Pointed Taps	3112	22-24
VERTANIUM® Spiral Pointed Taps	TN-3112	22-24
Spiral Pointed Taps - Metric	3112-M	24
VERTANIUM® Spiral Pointed Taps - Metric	TN-3112-M	24
6" Extension Spiral Point Taps	3112-E	25
CNC Heavy Duty Spiral Point Taps	3112-HD	25-26
VERTANIUM® CNC Heavy Duty Spiral Pointed Taps	TN-3112-HD	25-26
CNC Heavy Duty Spiral Point Taps - Metric	3112-MHD	26
Spiral Fluted Taps		
Spiral Fluted Taps, Regular Helix	5150	27
VERTANIUM® Spiral Fluted Taps, Regular Helix	TN-5150	27
Spiral Fluted Taps - High Helix	5155	27-28
VERTANIUM® Spiral Fluted Hand Taps, High Helix	TN-5155	27-28
Spiral Fluted Taps, High Helix - Metric	5155-M	28
VERTANIUM® CNC Heavy Duty Spiral Fluted Taps	TN-5155-HD	29
Forming Taps		
CNC Forming Taps	1986	30-31
VERTANIUM® CNC Forming Taps	TN-1986	30-31
CNC Forming Taps - Metric	1986-M	31
VERTANIUM® CNC Forming Taps - Metric	TN-1986-M	31

continued on next page



Description	Style Number	Page
-------------	--------------	------

Pipe Taps

Taper Pipe Taps, Regular, Full Thread	3180	32
VERTANIUM® Taper Pipe Taps	TN-3180	32
CNC Extra Length Taper Pipe Taps	3180-E	32
VERTANIUM® CNC Extra Length Taper Pipe Taps	TN-3180-E	32
Taper Pipe Taps, Interrupted Thread	3182	33
VERTANIUM® Coated Taper Pipe Taps, Interrupted Thread, NPTF	TN-3182	33
Taper Pipe Taps, High Hook	3183	33
Taper Pipe Taps, High Hook, Surface Treated	S-3183	33
Straight Pipe Taps - NPS, NPSM, NPSC	3181	34
Straight Pipe Taps - NPSF Dryseal	3181-D	34

Dies

Hexagon Rethreading Dies, Carbon Steel	280	35
Solid Round Dies, Taper Pipe	290	35
Round Adjustable Dies, High Speed Steel	2290	35

Accessories

Die Stocks for Round Adjustable Dies	36
Tap Wrenches	36

Technical Information


Types of Taps	37
Chamfer Styles	37
Tap Facts	38-39
Table #1 Tap Recommendations for Classes 2, 3, 2B and 3B Unified and American National Screw Threads	39
Illustration #1 General Tap Dimensions	40
Table #2 USCTI Table 302 Standard Tap Dimensions, Ground Thread	40
Table #3 USCTI Table 303 Special Fine Pitch Taps - Short Series	41
Table #4 General Tap Dimension Tolerances	41
Illustration #2 Necked Taps	42
Table #5 USCTI Table 302A General Tap Dimensions and Tolerances	42
Table #6 USCTI Table 311 General Dimensions and Tolerances for Straight and Taper Pipe Taps	42
Table #7 Surface Treatments and Coatings for High-Speed Steel Ground Thread Taps	43
Table #8 High-Speed Steel Tap Coating and Surface Treatment Guide	43
CNC Forming Taps	44
Table #9 CNC Forming Tap Recommendations for Nominal Class of Fit	44
Table #10 Inch Tap/Drill Sizes for Forming Taps	45
Table #11 Metric Tap/Drill Sizes for Forming Taps	45
ISO Metric Threads	46
Table #12 Metric Screw Threads	46
Table #13 Suggested Speeds for High-Speed Steel and VERTANIUM Taps	47
Table #14 Speeds for Taps Conversion Chart	47
Table #15 Tap Drill Sizes Probable Percentage of Full Thread	48
Table #16 Metric Tap/Drill Sizes Probable Percentage of Full Thread	49
Table #17 Tap/Drill Size Formulae	49
Table #18 Word and Term Definitions Applying to Screw Threads, Taps, and Dies	50-52

Index by Order Number	53-56
-----------------------------	-------



TAP LIST NUMBER CODES

Example: TiCN Coated HP-CNC Spiral Point Tap for Hard Metals, Extension Length

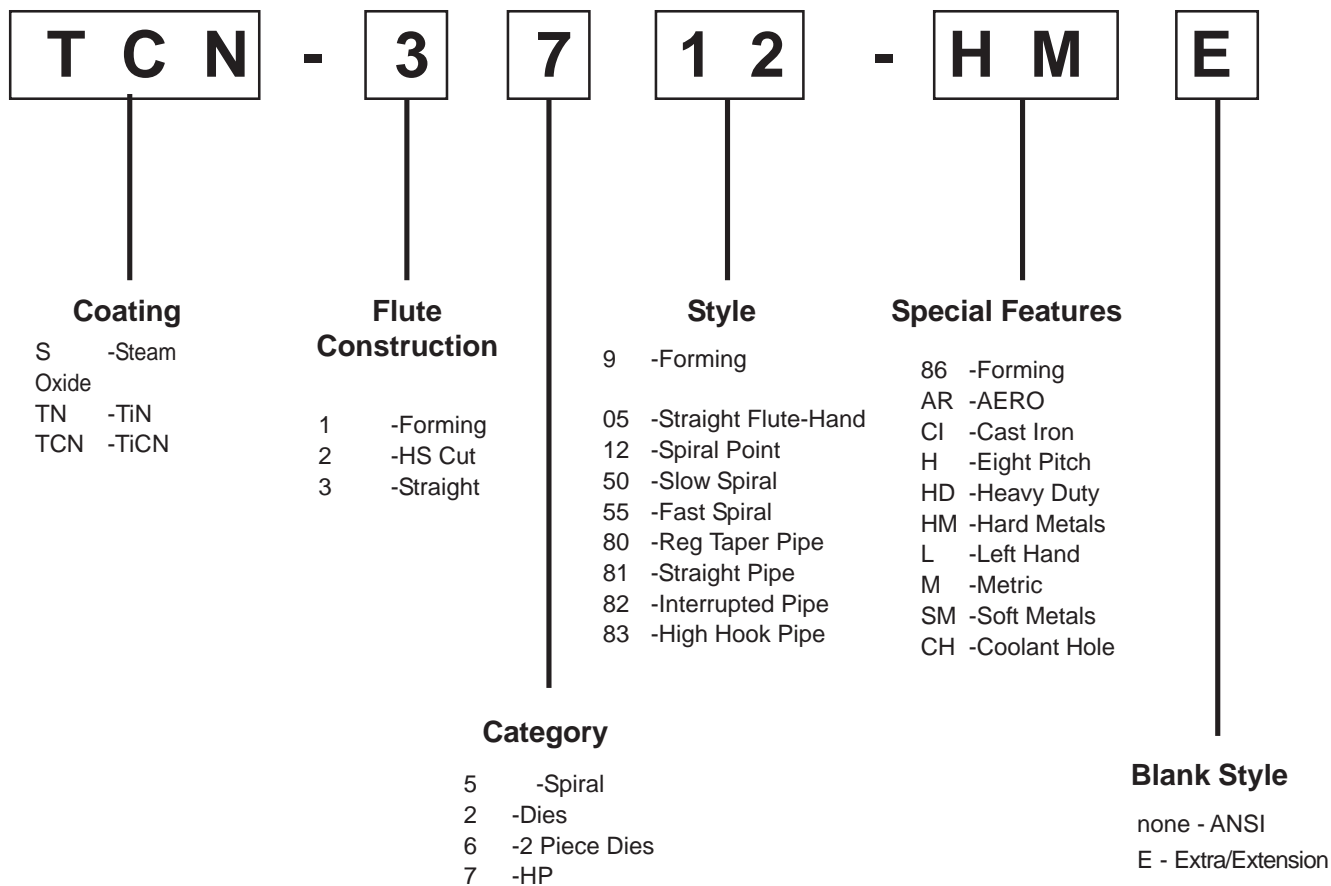



High Performance Tap Selector

- ◆ Select tap based on material to be threaded.
- ◆ Select high performance coated taps for additional tool life.

HARDNESS
Rc BHN

MATERIAL

THROUGH HOLES

Material	Tap Style	Page
Stainless	3712SM	6
Softer metal	TN3712SM	6
Harder metal	3712HM	8
	TCN3712HM	8
Cast iron	3705HDCI	10
Aerospace metal	TN3712AR	5

Speed SFM (Bright)

BLIND HOLES

Material	Tap Style	Page
Stainless	5750SM	7
Softer metal	TN5750SM	7
Harder metal	5750HM	9
	TCN5750HM	9
Cast iron	3705HDCI	10

Speed SFM (Bright)

Speed SFM (Bright)	24-40	10-25	15-40	10-25	15-30	10-20	5-10	5-10	45-75	30-60	20-35	20-35
45-75	◆											
15-35		◆										
45-70			◆									
25-50				◆								
30-50					◆							
15-30						◆						
20-30							◆					
10-20								◆				
75-115									◆			
40-100										◆		
40-50											◆	
40-50												◆

Steels

Carbon
Tool, Mold

Cast Iron

Gray
Ductile

Stainless Steels

Nickel Base Alloys
(Inconel, Waspalloy,
Hastelloy, etc.)

Aluminum, Copper, Magnesium

Cast Aluminum, Copper Alloy

Plastic

Soft, stringy chips
Plastic, Fiberglass, Bakelite
Broken chips



HP-CNC AERO SPIRAL POINT TAPS
 Ground Thread / Premium HSS
List No. TN-3712-AR VERTANIUM® Coated
 Machine Screw and Fractional Sizes



- Designed for tapping heat resisting stainless steel alloys such as A286 at 275 BHN
- Recommended for through hole tapping
- Manufactured from HSS premium material
- TiN coated to improve performance
- Spiral point pushes chips forward
- Plug chamfer

Tap Size	TPI	Pitch Dia.	# of Flutes	TN-3712-AR Plug
6	32 NC	H3	3	285057
8	32 NC	H3	3	285107
10	24 NC	H3	3	285156
10	32 NF	H3	3	285206
10	32 NF	H5	3	285222
1/4	20 NC	H3	3	285255
1/4	20 NC	H5	3	285305
1/4	28 NF	H3	3	285354
1/4	28 NF	H5	3	285370
5/16	18 NC	H3	3	285404
5/16	18 NC	H5	3	285420
5/16	24 NF	H3	3	285453
5/16	24 NF	H5	3	285479
3/8	16 NC	H3	3	285503
3/8	16 NC	H5	3	285552
3/8	24 NF	H3	3	285602
3/8	24 NF	H5	3	285628
7/16	14 NC	H3	3	285651
7/16	20 NF	H3	3	285701
1/2	13 NC	H3	3	285750
1/2	13 NC	H5	3	285801
1/2	20 NF	H3	3	285859

Package Quantities: No 6-10, 1/4", = 12/pkg; 5/16" to 1/2" = 6/pkg



VERMONT TAP & DIE

HP-CNC SPIRAL POINT TAPS SOFT METALS & STAINLESS

Ground Thread / Premium HSS

List No. 3712-SM X-10 Treated

List No. TN-3712-SM VERTANIUM® Coated

Machine Screw, Fractional and Metric Sizes



- Designed for tapping soft to medium hard steel and stainless at 346 BHN or less
- Recommended for through hole tapping
- Spiral point pushes chips forward
- Manufactured from PM-M4 HSS
- Black oxide reduces galling & chip welding
- TIN coated for higher speeds and wear resistance
- Plug chamfer

HIGH PERFORMANCE TAPS

Tap Size	TPI	# of Flutes	3712-SM H2	3712-SM H3	3712-SM H4	3712-SM H5	TN-3712-SM H2	TN-3712-SM H3	TN-3712-SM H4
4	40	2	330302				330714		
6	32	2	330303	330309		330332	330715	330716	
8	32	3	330304	330310		330333		330717	
10	24	3	330305	330311		330334		330718	
10	32	3	330306	330312		330335		330719	
1/4	20	3	330307	330313		330336		330720	330721
1/4	28	3	330308	330314	330329			330722	
5/16	18	3		330315		330337		330723	
5/16	24	3		330316	330330			330724	
3/8	16	3		330317		330338		330725	
3/8	24	3		330318	330331			330951	
7/16	14	3		330319		330339		330726	
7/16	20	3		330320		330340		330727	
1/2	13	3		330321		330341		330728	
1/2	20	3		330322		330342		330729	
9/16	12	3		330323				330730	
9/16	18	3		330324				330731	
5/8	11	3		330325		330343		330732	
5/8	18	3		330326				330733	
3/4	10	3		330327				330734	
3/4	16	3		330328				330735	

Package Quantities: No. 4 - 10, 1/4" = 12/pkg; 5/16" to 1/2" = 6/pkg; 9/16" to 3/4" = 3/pkg

Tap Size	Pitch (mm)	# of Flutes	3712-SM D3	3712-SM D4	3712-SM D5	3712-SM D6
M3	0.5	2	330344			
M4	0.7	3		330345		
M5	0.8	3		330346		
M6	1	3			330347	
M8	1.25	3			330348	
M10	1.5	3				330349
M12	1.75	3				330350
M14	1.5	3				330351
M18	1.5	3				330352

Package Quantities: M3 to M6 = 12/pkg; M8 to M12 = 6/pkg; M14 to M18 = 3/pkg



HP-CNC SPIRAL FLUTED TAPS SOFT METALS & STAINLESS

Ground Thread / Premium HSS

List No. 5750-SM X-10 Treated

List No. TN-5750-SM VERTANIUM® Coated

Machine Screw, Fractional and Metric Sizes



- Designed for tapping soft to medium hard steel at 346 BHN or less
- Spiral flute design recommended for blind holes
- 2.5 thread modified bottoming chamfer
- Manufactured from PM-M4 premium material
- Black oxide reduces galling & chip welding
- TiN coated for higher speeds & wear resistance

Tap Size	TPI	# of Flutes	5750-SM H2	5750-SM H3	5750-SM H4	5750-SM H5	TN-5750-SM H2	TN-5750-SM H3	TN-5750-SM H4
4	40	2	330455				330758		
6	32	3	330456	330462		330485	330759	330760	
8	32	3	330457	330463		330486		330761	
10	24	3	330458	330464		330487		330762	
10	32	3	330459	330465		330488		330763	
1/4	20	3	330460	330466		330489		330764	330765
1/4	28	3	330461	330467	330482			330766	
5/16	18	3		330468		330490		330767	
5/16	24	3		330469	330483			330768	
3/8	16	3		330470		330491		330769	
3/8	24	3		330471	330484			330770	
7/16	14	3		330472		330492		330771	
7/16	20	3		330473		330493		330772	
1/2	13	3		330474		330494		330773	
1/2	20	3		330475		330495		330774	
9/16	12	3		330476				330775	
9/16	18	3		330477				330776	
5/8	11	4		330478		330496		330777	
5/8	18	4		330479				330778	
3/4	10	4		330480				330779	
3/4	16	4		330481				330780	

Package Quantities: No. 4 - 10, 1/4" = 12/pkg; 5/16" to 1/2" = 6/pkg; 9/16" to 3/4" = 3/pkg

Tap Size	Pitch (mm)	# of Flutes	5750-SM D3	5750-SM D4	5750-SM D5	5750-SM D6
M3	0.5	2	330497			
M4	0.7	3		330498		
M5	0.8	3		330499		
M6	1	3			330502	
M8	1.25	3			330503	
M10	1.5	3				330504
M12	1.75	3				330505
M14	1.5	3				330506
M18	1.5	4				330507

Package Quantities: M3 to M6 = 12/pkg; M8 to M12 = 6/pkg; M14 to M18 = 3/pkg



VERMONT TAP & DIE

HP-CNC SPIRAL POINT TAPS HARD METALS

Ground Thread / Premium HSS

List No. 3712-HM X-10 Treated

List No. TCN-3712-HM TiCN Coated

Machine Screw, Fractional and Metric Sizes



- Designed for tapping harder materials up to 45 Rc
- Recommended for through hole tapping
- Spiral point pushes chips forward
- Plug chamfer
- Manufactured from PM M-4
- Black oxide reduces chip welding
- TiCN coated to increase tap life

Tap Size	TPI	# of Flutes	3712-HM H2	3712-HM H3	3712-HM H4	3712-HM H5	TCN-3712-HM H2	TCN-3712-HM H3	TCN-3712-HM H4
4	40	2	330353				330736		
6	32	2	330354	330360		330383	330737	330738	
8	32	3	330355	330361		330384		330739	
10	24	3	330356	330362		330385		330740	
10	32	3	330357	330363		330386		330952	
1/4	20	3	330358	330364		330387		330741	330742
1/4	28	3	330359	330365	330380			330743	
5/16	18	3		330366		330388		330744	
5/16	24	3		330367	330381			330745	
3/8	16	3		330368		330389		330746	
3/8	24	3		330369	330382			330747	
7/16	14	4		330370		330390		330748	
7/16	20	4		330371		330391		330749	
1/2	13	4		330372		330392		330750	
1/2	20	4		330373		330393		330751	
9/16	12	4		330374				330752	
9/16	18	4		330375				330753	
5/8	11	4		330376		330394		330754	
5/8	18	4		330377				330755	
3/4	10	4		330378				330756	
3/4	16	4		330379				330757	

Package Quantities: No. 4 - 10, 1/4" = 12/pkg; 5/16" to 1/2" = 6/pkg; 9/16" to 3/4" = 3/pkg

Tap Size	Pitch (mm)	# of Flutes	3712-HM D3	3712-HM D4	3712-HM D5	3712-HM D6
M3	0.5	2	330395			
M4	0.7	3		330396		
M5	0.8	3		330397		
M6	1	3			330398	
M8	1.25	3			330399	
M10	1.5	3				330400
M12	1.75	4				330401
M14	1.5	4				330402
M18	1.5	4				330403

Package Quantities: M3 to M6 = 12/pkg; M8 to M12 = 6/pkg; M14 to M18 = 3/pkg

HIGH PERFORMANCE TAPS



HP-CNC SPIRAL FLUTED TAPS HARD METALS

Ground Thread / Premium HSS

List No. 5750-HM X-10 Treated

List No. TCN-5750-HM TiCN Coated

Machine Screw, Fractional and Metric Sizes

- Designed for tapping harder materials up to 45 Rc
- Spiral flute design recommended for blind holes
- 2.5 thread modified bottoming chamfer
- Manufactured from PM M-4
- Black oxide reduces chip welding
- TiCN coated to increase tap life



Tap Size	TPI	# of Flutes	5750-HM				TCN-5750-HM			
			H2	H3	H4	H5	H2	H3	H4	
4	40	2	330508					330781		
6	32	2	330509	330515			330538	330782	330783	
8	32	2	330510	330516			330539		330784	
10	24	3	330511	330517			330540		330785	
10	32	3	330512	330518			330541		330786	
1/4	20	3	330513	330519			330542		330787	330788
1/4	28	3	330514	330520	330535				330789	
5/16	18	3		330521			330543		330790	
5/16	24	3		330522	330536				330791	
3/8	16	3		330523			330544		330792	
3/8	24	3		330524	330537				330793	
7/16	14	3		330525			330545		330794	
7/16	20	3		330526			330546		330795	
1/2	13	4		330527			330547		330796	
1/2	20	4		330528			330548		330797	
9/16	12	4		330529					330798	
9/16	18	4		330530					330799	
5/8	11	4		330531			330549		330802	
5/8	18	4		330532					330803	
3/4	10	4		330533					330804	
3/4	16	4		330534					330805	

Package Quantities: No. 4 - 10, 1/4" = 12/pkg; 5/16" to 1/2" = 6/pkg; 9/16" to 3/4" = 3/pkg

Tap Size	Pitch (mm)	# of Flutes	5750-HM D3	5750-HM D4	5750-HM D5	5750-HM D6
M3	0.5	2	330550			
M4	0.7	2		330551		
M5	0.8	3		330552		
M6	1	3			330553	
M8	1.25	3			330554	
M10	1.5	3				330555
M12	1.75	4				330556
M14	1.5	4				330557
M18	1.5	4				330558

Package Quantities: M3 to M6 = 12/pkg; M8 to M12 = 6/pkg; M14 to M18 = 3/pkg



VERMONT TAP & DIE

HP-CNC STRAIGHT FLUTED HAND TAPS CAST IRON

Ground Thread / Premium HSS

List No. 3705-HDCI X-20 Treated

Machine Screw, Fractional and Metric Sizes



- Straight fluted tap design for "Cast Iron" materials
- Manufactured from PM M-4 premium material
- Semi-bottom chamfer (2 to 2-1/2 threads) for through and blind holes
- X-20 treatment (oxide over nitride)
- Titanium Carbonitride (TiCN) available upon request

HIGH PERFORMANCE TAPS

Tap Size	TPI		# of Flutes	3705-HDCI	
	NC	NF		H3	H5
10	24		4	330259	330277
10		32	4	330260	
1/4	20		4	330261	330278
1/4		28	4	330262	
5/16	18		4	330263	330279
5/16		24	4	330264	
3/8	16		4	330265	330280
3/8		24	4	330266	
7/16	14		4	330267	330281
7/16		20	4	330268	330282
1/2	13		4	330269	330283
1/2		20	4	330270	330284
9/16	12		4	330271	330285
9/16		18	4	330272	330286
5/8	11		6	330273	330287
5/8		18	6	330274	330288
3/4	10		6	330275	330289
3/4		16	6	330276	330290

Package Quantities: No.10, 1/4" = 12/pkg;
5/16" to 1/2" = 6/pkg; 9/16" to 3/4" = 3/pkg

Tap Size	Pitch (mm)	# of Flutes	3705-HDCI		
			D4	D5	D6
M5	0.8	4	330291		
M6	1	4		330292	
M8	1.25	4		330293	
M10	1.5	4			330294
M12	1.25	4			330295
M12	1.75	4			330296
M14	1.25	4			330297
M14	1.5	4			330298
M18	1.5	6			330299

Package Quantities: M3 to M6 = 12/pkg; M8 to M12 = 6/pkg; M14 to M18 = 3/pkg



STRAIGHT FLUTED HAND TAPS

Ground Thread / High Speed Steel

List No. 3105

List No. TN-3105 VERTANIUM® Coated

Machine Screw and Fractional Sizes

including oversize and optional number of flutes



- Taper chamfer generally for starting or hand operations
- Plug chamfer for through holes (4 - 5 threads)
- Bottoming chamfer for blind holes (1 -2 threads)
- Ground threads
- Optional number of flutes to optimize tapping operation
- Optional "H" limit tolerance to meet individual customer requirements
- TiN coating for higher tapping speeds & wear resistance reduces tapping torque and tap breakage

Tap Size	TPI	Pitch Dia	# Flutes	Overall Length	Thread Length	3105 Taper	3105 Plug	3105 Bottoming	TN-3105 Taper	TN-3105 Plug	TN-3105 Bottoming
0	80 NF	H1	2	1-5/8	5/16	—	300017	300025	—	—	—
0	80 NF	H2	2	1-5/8	5/16	—	300041	300058	—	300047	300054
1	64 NC	H1	2	1-11/16	3/8	300066	300074	300082	—	—	—
1	64 NC	H2	2	1-11/16	3/8	—	300108	—	—	—	—
1	72 NF	H1	2	1-11/16	3/8	300124	300133	300140	—	—	—
1	72 NF	H2	2	1-11/16	3/8	—	300165	300173	—	—	—
2	56 NC	H1	2	1-3/4	7/16	—	300199	300207	—	—	—
2	56 NC	H1	3	1-3/4	7/16	300249	300256	300264	—	—	—
2	56 NC	H2	3	1-3/4	7/16	300272	300280	300299	300278	300286	300294
2	64 NF	H2	3	1-3/4	7/16	300397	300405	300413	300393	300402	300419
3	48 NC	H2	3	1-13/16	1/2	300512	300520	300538	339044	300526	339045
3	56 NF	H2	3	1-13/16	1/2	300637	300645	300652	339046	339047	339048
4	36 NS	H2	3	1-7/8	9/16	—	300702	300710	—	—	—
4	40 NC	H1	3	1-7/8	9/16	—	300793	—	—	—	—
4	40 NC	H2	2	1-7/8	9/16	—	300769	300778	—	—	—
4	40 NC	H2	3	1-7/8	9/16	300819	300827	300835	300815	300823	300831
4	48 NF	H1	3	1-7/8	9/16	—	300918	—	—	—	—
4	48 NF	H2	3	1-7/8	9/16	300934	300942	300959	300930	300948	300955
5	40 NC	H2	2	1-15/16	5/8	—	301007	301015	—	—	—
5	40 NC	H2	3	1-15/16	5/8	301056	301064	301072	301052	301060	301078
5	44 NF	H2	3	1-15/16	5/8	301171	301189	301197	301177	301185	301193
6	32 NC	H1	3	2	11/16	301296	301304	301312	—	—	—
6	32 NC	H2	2	2	11/16	—	301247	301254	—	—	—
6	32 NC	H2	3	2	11/16	301320	301338	301346	—	—	—
6	32 NC	H3	2	2	11/16	—	301270	301288	—	—	—
6	32 NC	H3	3	2	11/16	301353	301361	301379	301359	301367	301375
6	32 NC	H7	3	2	11/16	—	323506	323514	—	—	—
6	40 NF	H2	2	2	11/16	—	301429	—	—	—	—
6	40 NF	H2	3	2	11/16	301478	301486	301494	301474	301482	301490
8	32 NC	H1	4	2-1/8	3/4	—	301692	301702	—	—	—
8	32 NC	H2	2	2-1/8	3/4	—	301544	301551	—	—	—
8	32 NC	H2	3	2-1/8	3/4	—	301635	301643	—	—	—
8	32 NC	H2	4	2-1/8	3/4	301718	301726	301734	—	—	—

continued on next page

HAND TAPS - GENERAL PURPOSE



VERMONT TAP & DIE

List No. 3105

List No. TN-3105 VERTANIUM® Coated ... continued

HAND TAPS - GENERAL PURPOSE

Tap Size	Pitch TPI	# Dia	Flutes	Overall Length	Thread Length	3105 Taper	3105 Plug	3105 Bottoming	TN-3105 Taper	TN-3105 Plug	TN-3105 Bottoming
8	32 NC	H3	2	2-1/8	3/4	—	301577	301585			
8	32 NC	H3	3	2-1/8	3/4	—	301668	301676			
8	32 NC	H3	4	2-1/8	3/4	301742	301759	301767	301748	301755	301763
8	32 NC	H7	4	2-1/8	3/4	—	323563	—			
8	36 NF	H1	4	2-1/8	3/4	—	301908	—			
8	36 NF	H2	4	2-1/8	3/4	301924	301933	301940	301920	301938	301946
10	24 NC	H1	4	2-3/8	7/8	—	302146	—			
10	24 NC	H2	2	2-3/8	7/8	—	301999	—			
10	24 NC	H2	4	2-3/8	7/8	302161	302179	302187			
10	24 NC	H3	2	2-3/8	7/8	—	302021	302039			
10	24 NC	H3	3	2-3/8	7/8	—	302112	302120			
10	24 NC	H3	4	2-3/8	7/8	302195	302203	302211	302191	302209	302217
10	32 NF	H1	4	2-3/8	7/8	302402	302419	302427			
10	32 NF	H2	2	2-3/8	7/8	—	302260	302278			
10	32 NF	H2	4	2-3/8	7/8	302435	302443	302450			
10	32 NF	H3	2	2-3/8	7/8	—	302294	302302			
10	32 NF	H3	3	2-3/8	7/8	—	302385	302393			
10	32 NF	H3	4	2-3/8	7/8	302468	302476	302484	302464	302472	302480
10	32 NF	H7	4	2-3/8	7/8	—	323688	—			
12	24 NC	H3	4	2-3/8	15/16	302526	302534	302542	302522	302530	302548
12	28 NF	H1	4	2-3/8	15/16	—	302567	—			
12	28 NF	H3	4	2-3/8	15/16	302583	302591	302609			
1/4	20 NC	H1	4	2-1/2	1	305008	305016	305024			
1/4	20 NC	H2	4	2-1/2	1	305033	305040	305057			
1/4	20 NC	H3	2	2-1/2	1	—	326004	326012	—	326002	326018
1/4	20 NC	H3	3	2-1/2	1	—	326160	326178	—	326166	326174
1/4	20 NC	H3	4	2-1/2	1	305065	305073	305081	305061	305079	305087
1/4	20 NC	H5	4	2-1/2	1	—	305107	305115	—	305103	305111
1/4	20 NC	H13	4	2-1/2	1	—	325006	—			
1/4	28 NF	H1	4	2-1/2	1	—	305164	—			
1/4	28 NF	H2	4	2-1/2	1	—	305198	305206			305209
1/4	28 NF	H3	2	2-1/2	1	—	326087	326095			
1/4	28 NF	H3	3	2-1/2	1	—	326244	326251	—	326240	—
1/4	28 NF	H3	4	2-1/2	1	305214	305222	305230	305210	305228	305236
1/4	28 NF	H4	4	2-1/2	1	—	305255	305263			
5/16	18 NC	H1	4	2-23/32	1-1/8	—	305347	305354			
5/16	18 NC	H2	4	2-23/32	1-1/8	—	305370	305388			
5/16	18 NC	H3	2	2-23/32	1-1/8	—	326285	326293			
5/16	18 NC	H3	3	2-23/32	1-1/8	—	326368	326376	—	326364	—
5/16	18 NC	H3	4	2-23/32	1-1/8	305396	305404	305412	305392	305403	305418
5/16	18 NC	H5	4	2-23/32	1-1/8	—	305438	305446	—	305434	305442
5/16	18 NC	H13	4	2-23/32	1-1/8	—	325048	—			
5/16	24 NF	H1	4	2-23/32	1-1/8	—	305461	305479			
5/16	24 NF	H2	4	2-23/32	1-1/8	—	305495	305503			
5/16	24 NF	H3	3	2-23/32	1-1/8	—	326442	326459			
5/16	24 NF	H3	4	2-23/32	1-1/8	305511	305529	305537	305517	305525	305533

continued on next page

VERMONT TAP & DIE



List No. 3105

List No. TN-3105 VERTANIUM® Coated . . . *continued*

Tap Size	Pitch TPI	# Dia	Flutes	Overall Length	Thread Length	3105 Taper	3105 Plug	3105 Bottoming	TN-3105 Taper	TN-3105 Plug	TN-3105 Bottoming
5/16	24 NF	H4	4	2-23/32	1-1/8	—	305552	305560			305563
3/8	16 NC	H1	4	2-15/16	1-1/4	—	305644	305651			
3/8	16 NC	H2	4	2-15/16	1-1/4	—	305677	305685			
3/8	16 NC	H3	3	2-15/16	1-1/4	—	326525	326533	—	326521	326539
3/8	16 NC	H3	4	2-15/16	1-1/4	305693	305701	305719	305699	305707	305715
3/8	16 NC	H5	4	2-15/16	1-1/4	—	305735	305743	—	305731	305749
3/8	16 NC	H13	4	2-15/16	1-1/4	—	325089	—			
3/8	24 NF	H1	4	2-15/16	1-1/4	—	305768	305776			
3/8	24 NF	H2	4	2-15/16	1-1/4	—	305792	305802			
3/8	24 NF	H3	3	2-15/16	1-1/4	—	326608	326616	—	326604	—
3/8	24 NF	H3	4	2-15/16	1-1/4	305818	305826	305834	305814	305822	305830
3/8	24 NF	H4	4	2-15/16	1-1/4	—	305859	305867			
7/16	14 NC	H3	3	3-5/32	1-7/16	—	326640	—			
7/16	14 NC	H3	4	3-5/32	1-7/16	305990	306006	306014	305996	306002	306010
7/16	14 NC	H5	4	3-5/32	1-7/16	—	306030	306048	—	306036	306044
7/16	14 NC	H13	4	3-5/32	1-7/16	—	325121	—			
7/16	20 NF	H3	4	3-5/32	1-7/16	306113	306121	306139	306119	306127	306135
7/16	20 NF	H5	4	3-5/32	1-7/16	—	306154	306162		306157	306165
1/2	13 NC	H1	4	3-3/8	1-21/32	—	306246	306253			
1/2	13 NC	H3	3	3-3/8	1-21/32	—	326681	326699	—	326687	326692
1/2	13 NC	H3	4	3-3/8	1-21/32	306295	306303	306311	306291	306309	306317
1/2	13 NC	H5	4	3-3/8	1-21/32	—	306337	306345	—	306333	306341
1/2	13 NC	H13	4	3-3/8	1-21/32	—	325162	—			
1/2	20 NF	H1	4	3-3/8	1-21/32	—	306394	—			
1/2	20 NF	H3	3	3-3/8	1-21/32	—	326707	—			
1/2	20 NF	H3	4	3-3/8	1-21/32	306444	306451	306469	306440	306457	306465
1/2	20 NF	H5	4	3-3/8	1-21/32	—	306485	—	—	306481	—
9/16	12 NC	H3	4	3-19/32	1-21/32	306626	306634	306642	306622	306630	306648
9/16	18 NF	H2	4	3-19/32	1-21/32	—	306725	—			
9/16	18 NF	H3	4	3-19/32	1-21/32	306741	306758	306766	306747	306754	306762
9/16	18 NF	H5	4	3-19/32	1-21/32	—	306782	—	—	306788	—
5/8	11 NC	H3	4	3-13/16	1-13/16	306923	306931	306949	306929	306937	306945
5/8	11 NC	H5	4	3-13/16	1-13/16	—	306964	306972	—	306960	306978
5/8	11 NC	H13	4	3-13/16	1-13/16	—	325204	—			
5/8	18 NF	H2	4	3-13/16	1-13/16	—	307020	—			
5/8	18 NF	H3	4	3-13/16	1-13/16	307046	307053	307061	307042	307059	307067
5/8	18 NF	H5	4	3-13/16	1-13/16	—	307087	307095	—	307083	307091
11/16	11 NC	H3	4	4-1/32	1-13/16	307160	307178	307186			
11/16	16 NF	H3	4	4-1/32	1-13/16	307194	307202	307210			
3/4	10 NC	H2	4	4-1/4	2	—	307327	—			
3/4	10 NC	H3	4	4-1/4	2	307343	307350	307368	307349	307356	307364
3/4	10 NC	H5	4	4-1/4	2	—	307384	307392	—	307380	307398
3/4	16 NF	H1	4	4-1/4	2	—	307418	—			
3/4	16 NF	H2	4	4-1/4	2	—	307442	—			
3/4	16 NF	H3	4	4-1/4	2	307467	307475	307483	307463	307471	307489
3/4	16 NF	H5	4	4-1/4	2	—	307509	307517	—	307505	307513

continued on next page

HAND TAPS - GENERAL PURPOSE



VERMONT TAP & DIE

List No. 3105

List No. TN-3105 VERTANIUM® Coated . . . *continued*

Tap Size	Pitch TPI	# Dia	Flutes	Overall Length	Thread Length	3105 Taper	3105 Plug	3105 Bottoming	TN-3105 Taper	TN-3105 Plug	TN-3105 Bottoming
7/8	9 NC	H4	4	4-11/16	2-7/32	307707	307715	307723	307703	307711	307729
7/8	9 NC	H6	4	4-11/16	2-7/32	—	307749	—	—	307745	—
7/8	14 NF	H2	4	4-11/16	2-7/32	—	307806	—	—	—	—
7/8	14 NF	H4	4	4-11/16	2-7/32	307822	307830	307848	307828	307836	307844
7/8	14 NF	H6	4	4-11/16	2-7/32	—	307863	—	—	307869	—
1	8 NC	H4	4	5-1/8	2-1/2	308069	308077	308085	308065	308073	308081
1	8 NC	H6	4	5-1/8	2-1/2	—	308101	—	—	308107	—
1	12 NF	H4	4	5-1/8	2-1/2	308184	308192	308200	339049	339050	339051
1	14 NS	H4	4	5-1/8	2-1/2	308275	308283	308291	—	—	—
1-1/8	7 NC	H4	4	5-7/16	2-9/16	308424	308432	308440	339052	339053	339054
1-1/8	12 NF	H4	4	5-7/16	2-9/16	308457	308465	308473	339055	339056	339057
1-1/4	7 NC	H4	4	5-3/4	2-9/16	308549	308556	308564	339058	339059	339060
1-1/4	12 NF	H4	6	5-3/4	2-9/16	308572	308580	308598	339061	339062	339063
1-3/8	6 NC	H4	4	6-1/16	3	308663	308671	308689	—	—	—
1-3/8	12 NF	H4	6	6-1/16	3	308697	308705	308713	—	—	—
1-1/2	6 NC	H4	4	6-3/8	3	308788	308796	308804	—	—	—
1-1/2	12 NF	H4	6	6-3/8	3	308812	308820	308838	—	—	—

Package Quantities: No 0-12, 1/4", = 12/pkg; 5/16" to 1/2" = 6/pkg; 9/16" to 1" = 3/pkg; 1-1/8" to 1-1/2" = 1/pkg

STRAIGHT FLUTED HAND TAP SETS

Ground Thread / High Speed Steel

List No. 3105- Sets

List No. TN-3105-Sets VERTANIUM® Coated

Machine Screw and Fractional Sizes

One each taper, plug, bottoming

Tap Size	Pitch TPI	# of Dia	Flutes	3105 Set EDP No.	TN-3105-Sets EDP No.
1	64 NC	H1	2	341524	—
1	72 NC	H1	2	341540	—
2	56 NC	H2	3	341573	174511
2	64 NF	H2	3	341581	174512
3	48 NC	H2	3	341599	355802
3	56 NF	H2	3	341607	355803
4	40 NC	H2	3	341623	174530
4	48 NC	H2	3	341649	174531
5	40 NC	H2	3	341664	174536
5	44 NF	H2	3	341672	174537

continued on next page

HAND TAPS - GENERAL PURPOSE



List No. 3105- Sets

List No. TN-3105-Sets VERTANIUM® Coated . . . *continued*

Tap Size	TPI	Pitch Dia	# of Flutes	3105 Set EDP No.	TN-3105-Sets EDP No.
6	32 NC	H2	3	341698	
6	32 NC	H3	3	341706	174538
6	40 NF	H2	3	341714	174539
8	32 NC	H2	4	341730	
8	32 NC	H3	4	341748	174544
8	36 NF	H2	4	341755	174545
10	24 NC	H2	4	341771	
10	24 NC	H3	4	341789	174508
10	32 NF	H2	4	341805	
10	32 NF	H3	4	341813	174509
12	24 NC	H3	4	341821	174510
12	28 NF	H3	4	341839	
1/4	20 NC	H2	4	342514	
1/4	20 NC	H3	4	342522	174506
1/4	28 NF	H3	4	342530	174507
5/16	18 NC	H3	4	342555	174532
5/16	24 NF	H3	4	342563	174533
3/8	16 NC	H3	4	342589	174528
3/8	24 NF	H3	4	342597	174529
7/16	14 NC	H3	4	342605	174540
7/16	20 NF	H3	4	342613	174541
1/2	13 NC	H3	4	342621	174504
1/2	20 NF	H3	4	342639	174505
9/16	12 NC	H3	4	342647	174546
9/16	18 NF	H3	4	342654	174547
5/8	11 NC	H3	4	342662	174534
5/8	18 NF	H3	4	342670	174535
11/16	11 NC	H3	4	342688	
11/16	16 NF	H3	4	342696	
3/4	10 NC	H3	4	342704	174513
3/4	16 NF	H3	4	342712	174514
7/8	9 NC	H4	4	342720	174543
7/8	14 NF	H4	4	342738	174542
1	8 NC	H4	4	342746	174503
1	12 NF	H4	4	342753	355804
1	14 NS	H4	4	342761	
1-1/8	7 NC	H4	4	342779	355805
1-1/8	12 NF	H4	4	342787	355807
1-1/4	7 NC	H4	4	342795	355808
1-1/4	12 NF	H4	6	342803	355809
1-3/8	6 NC	H4	4	342811	
1-3/8	12 NF	H4	6	342829	
1-1/2	6 NC	H4	4	342837	
1-1/2	12 NF	H4	6	342845	

Package Quantities: 1 set/pkg



VERMONT TAP & DIE

METRIC STRAIGHT FLUTED HAND TAPS

Ground Thread / High Speed Steel

List No. 3105-M

List No. TN-3105-M VERTANIUM® Coated

Metric Sizes

- Taper chamfer generally for starting or hand operations
- Plug chamfer for through holes (4 - 5 threads)
- Bottoming chamfer for blind holes (1 - 2 threads)
- Ground threads
- TiN coating for higher tapping speeds & wear resistance
- Pitch diameter limits for ISO Class 6H (medium fit)



Tap Size	Pitch (mm)	Pitch Dia.	# of Flutes	Overall Length	Thread Length	3105-M Taper	3105-M Plug	3105-M Bottoming	TN-3105-M Plug	TN-3105-M Bottoming
M1.6	0.35	D3	2	1-5/8	5/16	—	328018	—	—	—
M2	0.4	D3	3	1-3/4	7/16	328067	328075	328083	328685	328686
M2.5	0.45	D3	3	1-13/16	1/2	—	328166	—	328689	—
M3	0.5	D3	3	1-15/16	5/8	328182	328190	328208	328188	328205
M3.5	0.6	D4	3	2	11/16	—	328257	—	328693	—
M4	0.7	D4	4	2-1/8	3/4	328273	328281	328299	328287	328295
M4.5	0.75	D4	4	2-3/8	7/8	—	328349	—	328697	—
M5	0.8	D4	4	2-3/8	7/8	328364	328372	328380	328378	328386
M6	1	D5	4	2-1/2	1	328422	328430	328448	328436	328444
M6.3	1	D5	4	2-1/2	1	—	328463	—	—	—
M7	1	D5	4	2-23/32	1-1/8	328489	328497	328505	—	—
M8	1.25	D5	4	2-23/32	1-1/8	328547	328554	328562	328550	328568
M10	1.5	D6	4	2-15/16	1-1/4	328604	328612	328620	328618	328626
M12	1.75	D6	4	3-3/8	1-21/32	328661	328679	328687	328675	328683
M14	2	D7	4	3-19/32	1-21/32	328752	328760	328778	328707	328708
M16	2	D7	4	3-13/16	1-13/16	328810	328828	328836	328710	328711
M18	2.5	D7	4	4-1/32	1-13/16	328877	328885	328893	328713	328714
M20	2.5	D7	4	4-15/32	2	328935	328943	328950	328716	328717
M24	3	D8	4	4-29/32	2-7/32	329057	329065	329073	328719	328720
M30	3.5	D9	4	5-7/16	2-9/16	329172	329180	329198	—	—
M36	4	D9	4	6-1/16	3	329297	329305	329313	—	—

Package Quantities: M1.6 to M6.3 = 12/pkg; M7 to M12 = 6/pkg; M14 to M24 = 3/pkg; M30 to M36 = 1/pkg

HAND TAPS - GENERAL PURPOSE



METRIC STRAIGHT FLUTED HAND TAP SETS

1 Each Taper, Plug, Bottoming

List No. 3105-M-Sets

List No. TN-3105-M-Sets VERTANIUM® Coated

Tap Size	Pitch (m/m)	Pitch Dia.	# of Flutes	3105-M Sets	TN-3105-M Sets
M2	0.4	D3	3	174516	343502
M2.5	0.45	D3	4	174559	343503
M3	0.5	D3	4	174519	343504
M3.5	0.6	D4	4	174560	343505
M4	0.7	D4	4	174520	343506
M4.5	0.75	D4	4	174561	343507
M5	0.8	D4	4	174521	343508
M6	1	D5	4	174522	343509
M7	1	D5	4	174523	343510
M8	1.25	D5	4	174524	343511
M10	1.5	D6	4	174548	343512
M12	1.75	D6	4	174549	343513
M14	2	D7	4	174550	343514
M16	2	D7	4	174551	343515
M18	2.5	D7	4	174552	343516
M20	2.5	D7	4	174553	343517
M24	3	D8	4	174515	343518
M30	3.5	D9	4	174517	
M36	4	D9	4	174518	

Package Quantities: 1 set/pkg

EIGHT PITCH HAND TAPS

Ground Thread / High Speed Steel / Straight Flute

List No. 3105-H

List No. 3105-H Sets

Fractional Sizes



- Taper chamfer generally for starting or hand operations
- Plug chamfer for through holes (4 - 5 threads)
- Bottoming chamfer for blind holes (1 - 2 threads)
- Ground threads
- Bright finish

Tap Size	TPI	Pitch Dia.	# of Flutes	Overall Length	Thread Length	3105-H Taper	3105-H Plug	3105-H Bottoming	3105-H Set
1-1/8	8	H5	4	5-7/16	2-9/16	327710	327712	327714	327716
1-1/4	8	H5	4	5-3/4	2-9/16	327720	327722	327724	327726
1-3/8	8	H5	4	6-1/16	3	327730	327732	327734	327736
1-1/2	8	H5	6	6-3/8	3	327740	327742	327744	327746
1-5/8	8	H6	6	6-11/16	3-3/16	—	327752	327754	
1-3/4	8	H6	6	7	3-3/16	327760	327762	327764	327766
1-7/8	8	H6	6	7-5/16	3-9/16	—	327772	327774	
2	8	H6	6	7-5/8	3-9/16	327780	327782	327784	327786
2-1/8	8	H6	6	8	3-9/16	—	327792	327794	
2-1/4	8	H6	6	8-1/4	3-9/16	—	327802	327804	
2-3/8	8	H6	6	8-1/2	4	—	327812	327814	
2-1/2	8	H6	6	8-3/4	4	—	327822	327824	

Package Quantities: 1/pkg Sets contain one each: taper, plug and bottoming.

HAND TAPS - GENERAL PURPOSE



6" EXTENSION HAND TAPS

Ground Thread / High Speed Steel / Straight Flute

List No. 3105-E

Machine Screw & Fractional Sizes

- Plug chamfer for through holes
- Ground threads
- Bottom chamfer for blind holes
- General purpose straight flute design
- Overall lengths are all 6"



Tap Size	TPI	Pitch Dia.	# of Flutes	Overall Length	Thread Length	3105-E Plug	3105-E Bottoming
6	32 NC	H3	3	6	11/16	918827	918828
8	32 NC	H3	4	6	3/4	918891	918892
10	24 NC	H3	4	6	7/8	918833	918834
10	32 NF	H3	4	6	7/8	918836	918837
1/4	20 NC	H3	4	6	1	918839	918840
1/4	28 NF	H3	4	6	1	918842	918843
5/16	18 NC	H3	4	6	1-1/8	918845	918846
5/16	24 NF	H3	4	6	1-1/8	918848	918849
3/8	16 NC	H3	4	6	1-1/4	918851	918852
3/8	24 NF	H3	4	6	1-1/4	918854	918855

Package Quantities: 1/pkg

General Dimension Tolerances - see Table #4

STRAIGHT FLUTED HAND TAPS for CAST IRON

Ground Thread / High Speed Steel / Straight Flute

List No. 3105-CI

Machine Screw and Fractional Sizes

- Special design and nitride surface treated for tapping highly abrasive materials
- Plug chamfer for through holes
- Ground threads
- Bottom chamfer for blind holes
- Semi-bottom (2 - 2.5 threads) offered to alleviate problem of "bell mouting"



Tap Size	TPI	Pitch Dia.	# of Flutes	Overall Length	Thread Length	3105-CI Plug	3105-CI Semi-Bott	3105-CI Bottoming
6	32 NC	H3	3	2	11/16	327139	327147	327155
8	32 NC	H3	4	2-1/8	3/4	327163	327171	327179
10	24 NC	H3	4	2-3/8	7/8	327187	327195	327203
10	32 NF	H3	4	2-3/8	7/8	327211	327219	327227
12	24 NC	H3	4	2-3/8	15/16	327235	327243	327251
1/4	20 NC	H3	4	2-1/2	1	327259	327267	327275
1/4	20 NC	H5	4	2-1/2	1	327283	327291	327309
1/4	28 NF	H3	4	2-1/2	1	327311	327315	327316
5/16	18 NC	H3	4	2-23/32	1-1/8	327317	327325	327333
5/16	18 NC	H5	4	2-23/32	1-1/8	327341	327358	327366
5/16	24 NF	H3	4	2-23/32	1-1/8	327368	327371	327372

continued on next page



List No. 3105CI ... continued

Tap Size	TPI	Pitch Dia.	#. of Flutes	Overall Length	Thread Length	3105-CI Plug	3105-CI Semi-Bott	3105-CI Bottoming
3/8	16 NC	H3	4	2-15/16	1-1/4	327374	327382	327390
3/8	16 NC	H5	4	2-15/16	1-1/4	327408	327416	327424
3/8	24 NF	H3	4	2-15/16	1-1/4	327426	327428	327430
7/16	14 NC	H3	4	3-5/32	1-7/16	327432	327440	327457
7/16	14 NC	H5	4	3-5/32	1-7/16	327465	327473	327481
7/16	20 NF	H3	4	3-5/32	1-7/16	327483	327485	327487
1/2	13 NC	H3	4	3-3/8	1-21/32	327499	327507	327515
1/2	13 NC	H5	4	3-3/8	1-21/32	327523	327531	327549
1/2	20 NF	H3	4	3-3/8	1-21/32	327551	327553	327555
1/2	20 NF	H5	4	3-3/8	1-21/32	327557	327559	327561
9/16	12 NC	H3	4	3-19/32	1-21/32	327563	327565	327567
9/16	12 NC	H5	4	3-19/32	1-21/32	327569	327571	327573
9/16	18 NF	H3	4	3-19/32	1-21/32	327575	327577	327579
9/16	18 NF	H5	4	3-19/32	1-21/32	327581	327583	327585
5/8	11 NC	H3	4	3-13/16	1-13/16	327587	327589	327591
5/8	11 NC	H5	4	3-13/16	1-13/16	327593	327595	327597
5/8	18 NF	H3	4	3-13/16	1-13/16	327599	327601	327603
5/8	18 NF	H5	4	3-13/16	1-13/16	327605	327607	327609
3/4	10 NC	H3	4	4-1/4	2	327611	327613	327615
3/4	16 NF	H3	4	4-1/4	2	327617	327619	327621

Package Quantities: No 6-12, 1/4", = 12/pkg; 5/16" to 1/2" = 6/pkg; 9/16" to 3/4" = 3/pkg

METRIC STRAIGHT FLUTED HAND TAPS for CAST IRON

Ground Thread / High Speed Steel / Straight Flute

List No. 3105-CIM

Metric Sizes



- Special design and nitride surface treated for tapping highly abrasive materials
- Plug chamfer for through holes
- Bottom chamfer for blind holes
- Pitch diameter limits for ISO class 6H (medium fit)
- Semi-bottom (2 - 2.5 threads) offered to alleviate problem of "bell mouting"

Tap Size	Pitch (mm)	Pitch Dia.	# of Flutes	Overall Length	Thread Length	3105-CIM Plug	3105-CIM Semi-Bott	3105-CIM Bottoming
M6	1	D5	4	2-1/2	1	327652	327650	327654
M8	1.25	D5	4	2-23/32	1-1/8	327658	327656	327660
M10	1.5	D6	4	2-15/16	1-1/4	327664	327662	327666
M12	1.75	D6	4	3-3/8	1-21/32	327670	327668	327672

Package Quantities: M6 = 12/pkg; M8 to M12 = 6/pkg



VERMONT TAP & DIE

STRAIGHT FLUTED HAND TAPS

Ground Thread / High Speed Steel / Left Hand

List No. 3105-L

List No. 3105-L Sets

Machine Screw and Fractional Sizes



- Taper chamfer generally for starting or hand operations
- Plug chamfer for through holes (4 - 5 threads)
- Bottoming chamfer for blind holes (1 - 2 threads)
- Ground threads
- Optional number of flutes to optimize tapping operation
- Optional "H" limit tolerance to meet individual customer requirements
- TiN coating for higher tapping speeds & wear resistance reduces tapping torque and tap breakage
- Left hand cut for left hand threads

Tap Size	TPI	Pitch Dia	# of Flutes	Overall Length	Thread Length	3105-L Taper	3105-L Plug	3105-L Bottoming	3105-L Set EDP No.
10	32 NC	H3	4	2-3/8	7/8	—	313102	313119	
1/4	20 NC	H3	4	2-1/2	1	317508	317516	317524	174562
1/4	28 NF	H3	4	2-1/2	1	—	317540	—	
5/16	18 NC	H3	4	2-23/32	1-1/8	317565	317573	317581	174563
5/16	24 NF	H3	4	2-23/32	1-1/8	317599	317607	317615	174564
3/8	16 NC	H3	4	2-15/16	1-1/4	317623	317631	317649	174565
3/8	24 NF	H3	4	2-15/16	1-1/4	317656	317664	317672	174566
7/16	14 NC	H3	4	3-5/32	1-7/16	317680	317698	317706	174567
7/16	20 NF	H3	4	3-5/32	1-7/16	317714	317722	317730	174568
1/2	13 NC	H3	4	3-3/8	1-21/32	317748	317755	317763	174569
1/2	20 NF	H3	4	3-3/8	1-21/32	317771	317789	317797	174570
9/16	12 NC	H3	4	3-19/32	1-21/32	317805	317813	317821	174571
9/16	18 NF	H3	4	3-19/32	1-21/32	—	317847	—	
5/8	11 NC	H3	4	3-13/16	1-13/16	317862	317870	317888	174572
5/8	18 NF	H3	4	3-13/16	1-13/16	317896	317904	317912	174573
3/4	10 NC	H3	4	4-1/4	2	317987	317995	318001	174574
3/4	16 NF	H3	4	4-1/4	2	318019	318027	318035	174575
7/8	9 NC	H4	4	4-11/16	2-7/32	—	318050	318068	
7/8	14 NF	H4	4	4-11/16	2-7/32	318076	318084	318092	174576
1	8 NC	H4	4	5-1/8	2-1/2	318100	318118	318126	174577
1	12 NF	H4	4	5-1/8	2-1/2	318134	318142	318159	174578
1	14 NS	H4	4	5-1/8	2-1/2	318167	318175	318183	174579

Package Quantities: No 10, 1/4", = 12/pkg; 5/16" to 1/2" = 6/pkg; 9/16" to 1" = 3/pkg

HAND TAPS - GENERAL PURPOSE



STRAIGHT FLUTED HAND TAPS

List No. TN-3105-CH VERTANIUM® Coated CNC COOLANT HOLE



- Best performance in blind holes
- Require “through the spindle” coolant source
- High pressure coolant forces chips back out flutes
- Semi-bottoming (2 - 2-1/2 threads) for blind hole tapping
- TiN coated for wear resistance

Tap Size	TPI	#. of Flutes	Pitch Dia.	TN-3105-CH Semi-Bott
3/8	16 NC	3	H3	298526
3/8	24 NF	3	H3	298527
7/16	14 NC	4	H3	298528
7/16	20 NF	4	H3	298529
1/2	13 NC	4	H3	298530
1/2	20 NF	4	H3	298531
9/16	12 NC	4	H3	298532
5/8	11 NC	4	H3	298533
3/4	10 NC	4	H3	298534
7/8	9 NC	4	H4	298535
1	8 NC	4	H4	298536

Package Quantities: 3/8" to 1/2" = 6/pkg; 9/16" to 1" = 3/pkg



VERMONT TAP & DIE

SPIRAL POINT TAPS

Ground Thread / High Speed Steel

List No. 3112

List No. TN-3112 VERTANIUM® Coated

Machine Screw and Fractional Sizes including
oversize H7 (H3+.002) and H13 (H3+.005)



- Ground threads
- Spiral point pushes chips forward for through hole applications
- Over size for pre-plate threads included as GH-7 and GH-13
- TiN coated for higher speeds & wear resistance
- Reduces tapping torque and tap breakage

SPIRAL POINTED TAPS - GENERAL PURPOSE

Tap Size	TPI	Pitch Dia.	# of Flutes	Overall Length	Thread Length	3112 Plug	3112 Bottoming	TN-3112 Plug	TN-3112 Bottoming
0	80 NF	H1	2	1-5/8	5/16	356002	356019		
0	80 NF	H2	2	1-5/8	5/16	356027	356035	356023	—
1	64 NC	H1	2	1-11/16	3/8	356043	—		
1	64 NC	H2	2	1-11/16	3/8	356068	—	356061	
1	72 NF	H1	2	1-11/16	3/8	356084	—		
1	72 NF	H2	2	1-11/16	3/8	356102	—	356106	—
2	56 NC	H1	2	1-3/4	7/16	356126	356134		
2	56 NC	H2	2	1-3/4	7/16	356142	356159	356148	—
2	64 NF	H2	2	1-3/4	7/16	356183	—	356189	—
3	48 NC	H2	2	1-13/16	1/2	356225	356233	356221	—
3	56 NF	H1	2	1-13/16	1/2	356241	—		
3	56 NF	H2	2	1-13/16	1/2	356266	—	356262	—
4	36 NS	H2	2	1-7/8	9/16	356282	—		
4	40 NC	H1	2	1-7/8	9/16	356308	—		
4	40 NC	H2	2	1-7/8	9/16	356324	356332	356320	356338
4	48 NF	H2	2	1-7/8	9/16	356365	—	356361	—
5	40 NC	H1	2	1-15/16	5/8	356381	—		
5	40 NC	H2	2	1-15/16	5/8	356407	356415	356403	—
5	44 NF	H2	2	1-15/16	5/8	356419	—	356402	—
6	32 NC	H1	2	2	11/16	356421	—	356420	—
6	32 NC	H2	2	2	11/16	356422	356498	356486	—
6	32 NC	H3	2	2	11/16	356506	356514	356502	356510
6	32 NC	H7	2	2	11/16	359005	359013		
6	40 NF	H2	2	2	11/16	356548	356555	356544	—
8	32 NC	H1	2	2-1/8	3/4	356563	—	356569	—
8	32 NC	H2	2	2-1/8	3/4	356589	356597	356585	—
8	32 NC	H3	2	2-1/8	3/4	356633	356634	356602	356635
8	32 NC	H7	2	2-1/8	3/4	359047	359054		
8	36 NF	H2	2	2-1/8	3/4	356647	—		
10	24 NC	H1	2	2-3/8	7/8	356662	—	356668	—
10	24 NC	H2	2	2-3/8	7/8	356688	356696	356684	—
10	24 NC	H3	2	2-3/8	7/8	356704	356712	356703	356718
10	24 NC	H7	2	2-3/8	7/8	359088	—	359084	—
10	32 NF	H1	2	2-3/8	7/8	356720	356738	356726	—
10	32 NF	H2	2	2-3/8	7/8	356746	356753	356742	—
10	32 NF	H3	2	2-3/8	7/8	356761	356779	356767	356775

continued on next page

VERMONT TAP & DIE



List No. 3112

List No. TN-3112 VERTANIUM® Coated ... continued

Tap	Pitch	# of	Overall	Thread	3112	3112	TN-3112	TN-3112
Size	TPI	Flutes	Length	Length	Plug	Bottoming	Plug	Bottoming
10	32 NF	H7	2	2-3/8	7/8	359120	—	359123
12	24 NC	H3	2	2-3/8	15/16	356803	—	356809
12	28 NF	H3	2	2-3/8	15/16	356845	—	356841
1/4	20 NC	H1	2	2-1/2	1	357009	—	—
1/4	20 NC	H2	2	2-1/2	1	357025	—	357021
1/4	20 NC	H3	2	2-1/2	1	357041	357058	357047 357054
1/4	20 NC	H3	3	2-1/2	1	357082	—	357088
1/4	20 NC	H5	2	2-1/2	1	357066	—	357062
1/4	20 NC	H5	3	2-1/2	1	357108	—	357101
1/4	20 NC	H13	2	2-1/2	1	358494	—	358490
1/4	28 NF	H1	2	2-1/2	1	357124	—	—
1/4	28 NF	H2	2	2-1/2	1	357140	—	—
1/4	28 NF	H3	3	2-1/2	1	357207	357215	—
1/4	28 NF	H3	2	2-1/2	1	357165	357173	357161 357179
1/4	28 NF	H4	2	2-1/2	1	357181	—	—
1/4	28 NF	H4	3	2-1/2	1	357223	—	357226
5/16	18 NC	H1	2	2-23/32	1-1/8	357249	—	—
5/16	18 NC	H2	2	2-23/32	1-1/8	357264	—	—
5/16	18 NC	H3	2	2-23/32	1-1/8	357280	357298	357286 357294
5/16	18 NC	H3	3	2-23/32	1-1/8	357322	—	357328
5/16	18 NC	H5	2	2-23/32	1-1/8	357306	—	357302
5/16	18 NC	H5	3	2-23/32	1-1/8	357348	—	357344
5/16	18 NC	H13	2	2-23/32	1-1/8	358510	—	358516
5/16	24 NF	H1	2	2-23/32	1-1/8	357363	—	—
5/16	24 NF	H2	2	2-23/32	1-1/8	357389	—	—
5/16	24 NF	H3	2	2-23/32	1-1/8	357405	357413	357401 357419
5/16	24 NF	H3	3	2-23/32	1-1/8	357447	—	—
5/16	24 NF	H4	2	2-23/32	1-1/8	357421	—	357427
5/16	24 NF	H4	3	2-23/32	1-1/8	357462	—	—
3/8	16 NC	H1	3	2-15/16	1-1/4	357488	—	—
3/8	16 NC	H2	3	2-15/16	1-1/4	357504	—	—
3/8	16 NC	H3	3	2-15/16	1-1/4	357520	—	357526
3/8	16 NC	H5	3	2-15/16	1-1/4	357546	—	357542
3/8	16 NC	H13	3	2-15/16	1-1/4	358536	—	358532
3/8	24 NF	H1	3	2-15/16	1-1/4	357561	—	—
3/8	24 NF	H2	3	2-15/16	1-1/4	357587	—	—
3/8	24 NF	H3	3	2-15/16	1-1/4	357603	—	357609
3/8	24 NF	H4	3	2-15/16	1-1/4	357629	—	—
7/16	14 NC	H2	3	3-5/32	1-7/16	357660	—	—
7/16	14 NC	H3	3	3-5/32	1-7/16	357686	—	357682
7/16	14 NC	H5	3	3-5/32	1-7/16	357702	—	—
7/16	14 NC	H13	3	3-5/32	1-7/16	358551	—	—
7/16	20 NF	H3	3	3-5/32	1-7/16	357769	—	357765
7/16	20 NF	H5	3	3-5/32	1-7/16	357785	—	—
1/2	13 NC	H2	3	3-3/8	1-21/32	357819	—	—
1/2	13 NC	H3	3	3-3/8	1-21/32	357827	—	357823
1/2	13 NC	H5	3	3-3/8	1-21/32	357835	—	357831

continued on next page

SPIRAL POINTED TAPS - GENERAL PURPOSE



VERMONT TAP & DIE

List No. 3112

List No. TN-3112 VERTANIUM® Coated ... continued

Tap Size	Pitch TPI	Pitch Dia.	# of Flutes	Overall Length	Thread Length	3112 Plug	3112 Bottoming	TN-3112 Plug	TN-3112 Bottoming
1/2	13 NC	H13	3	3-3/8	1-21/32	358569	—	358565	—
1/2	20 NF	H1	3	3-3/8	1-21/32	357843	—		
1/2	20 NF	H2	3	3-3/8	1-21/32	357850	—		
1/2	20 NF	H3	3	3-3/8	1-21/32	357868	—	357864	—
1/2	20 NF	H5	3	3-3/8	1-21/32	357876	—	357879	—
5/8	11 NC	H3	3	3-13/16	1-13/16	357926	—	357922	—
5/8	11 NC	H5	3	3-13/16	1-13/16	357934	—	357930	—
5/8	11 NC	H13	3	3-13/16	1-13/16	358585	—		
5/8	18 NF	H3	3	3-13/16	1-13/16	357942	—		
3/4	10 NC	H3	3	4-1/4	2	357967	—	357963	—
3/4	10 NC	H5	3	4-1/4	2	357975	—	357971	—

Package Quantities: No 0-12, 1/4" = 12/pkg; 5/16" to 1/2" = 6/pkg; 5/8" to 1" = 3/pkg

SPIRAL POINT METRIC TAPS

Ground Thread / High Speed Steel

List No. 3112-M

List No. TN-3112-M VERTANIUM® Coated

Metric Sizes

- Ground threads
- Spiral point pushes chips forward for through hole applications
- TiN coated for higher speeds & wear resistance



Tap Size	Pitch (mm)	Pitch Dia.	# of Flutes	OA Length.	Thread Length	3112-M Plug	TN-3112-M Plug
M1.6	0.35	D3	2	1-5/8	5/16	360755	
M2	0.4	D3	2	1-3/4	7/16	360771	360774
M2.5	0.45	D3	2	1-13/16	1/2	360797	
M3	0.5	D3	2	1-15/16	5/8	360805	360801
M3.5	0.6	D4	2	2	11/16	360821	
M4	0.7	D4	2	2-1/8	3/4	360839	360835
M4.5	0.75	D4	2	2-3/8	7/8	360854	
M5	0.8	D4	2	2-3/8	7/8	360862	360868
M6	1	D5	2	2-1/2	1	360888	360884
M6.3	1	D5	2	2-1/2	1	360896	
M7	1	D5	2	2-23/32	1-1/8	360904	
M8	1.25	D5	2	2-23/32	1-1/8	360920	360926
M10	1.5	D6	3	2-15/16	1-1/4	360946	360942
M12	1.75	D6	3	3-3/8	1-21/32	360961	360967
M14	2	D7	3	3-19/32	1-21/32	360995	
M16	2	D7	3	3-13/16	1-13/16	361019	
M18	2.5	D7	3	4-1/32	1-13/16	361035	
M20	2.5	D7	3	4-15/32	2	361050	

Package Quantities: M1.6 to M6.3 = 12/pkg; M7 to M12 = 6/pkg; M14 to M20 = 3/pkg

SPIRAL POINTED TAPS - GENERAL PURPOSE



SPIRAL POINT TAPS

6" Extension

List No. 3112-E

Machine Screw and Fractional Sizes



- Plug chamfer for general purpose applications
- Ground threads
- Spiral point pushes chips forward for through hole application
- Overall lengths are all 6" for additional reach

Tap Size	TPI	Pitch Dia.	# of Flutes	Overall Length	Thread Length	3112-E Plug
6	32 NC	H3	2	6	11/16	918930
8	32 NC	H3	2	6	3/4	918932
10	24 NC	H3	2	6	7/8	918934
10	32 NF	H3	2	6	7/8	918935
1/4	20 NC	H3	2	6	1	918936
1/4	28 NF	H3	2	6	1	918937
5/16	18 NC	H3	2	6	1-1/8	918938
5/16	24 NF	H3	2	6	1-1/8	918939
3/8	16 NC	H3	3	6	1-1/4	918940
3/8	24 NF	H3	3	6	1-1/4	918941

Package Quantities: 1/pkg

SPIRAL POINT TAPS

CNC / Heavy Duty / Premium HSS

List No. 3112-HD

List No. TN-3112-HD VERTANIUM® Coated

Machine Screw and Fractional Sizes



- Designed to tap hard materials up to 30Rc
- Recommended for through hole tapping
- Manufactured with premium HSS
- TiN coated for higher speeds and wear resistance
- Plug chamfer

Tap Size	TPI	Pitch Dia.	#. of Flutes	Overall Length	Thread Length	3112-HD Plug	TN-3112-HD Plug
6	32 NC	H3	3	2	3/8	282108	280108
8	32 NC	H3	3	2-1/8	3/8	282157	280157
10	24 NC	H3	3	2-3/8	1/2	282207	280207
10	32 NF	H3	3	2-3/8	1/2	282256	280256
10	32 NF	H5	3	2-3/8	1/2	282272	280272
1/4	20 NC	H3	3	2-1/2	5/8	282306	280306
1/4	20 NC	H5	3	2-1/2	5/8	282355	280355
1/4	28 NF	H3	3	2-1/2	5/8	282405	280405
1/4	28 NF	H5	3	2-1/2	5/8	282421	280421
5/16	18 NC	H3	3	2-23/32	11/16	282454	280454
5/16	18 NC	H5	3	2-23/32	11/16	282470	280470
5/16	24 NF	H3	3	2-23/32	11/16	282504	280504
5/16	24 NF	H5	3	2-23/32	11/16	282520	280520
3/8	16 NC	H3	3	2-15/16	3/4	282553	280553

continued on next page



VERMONT TAP & DIE

List No. 3112-HD

List No. TN-3112-HD VERTANIUM® Coated . . . continued

Tap Size	TPI	Pitch Dia.	# of Flutes	Overall Length	Thread Length	3112-HD Plug	TN-3112-HD Plug
3/8	16 NC	H5	3	2-15/16	3/4	282603	280603
3/8	24 NF	H3	3	2-15/16	3/4	282652	280652
3/8	24 NF	H5	3	2-15/16	3/4	282678	280678
7/16	14 NC	H3	3	3-5/32	7/8	282702	280702
7/16	20 NF	H3	3	3-5/32	7/8	282751	280751
1/2	13 NC	H3	3	3-3/8	15/16	282801	280801
1/2	13 NC	H5	3	3-3/8	15/16	282850	280850
1/2	20 NF	H3	3	3-3/8	15/16	282901	280901
5/8	11 NC	H3	3	3-13/16	1-1/8	282959	280959
5/8	11 NC	H5	3	3-13/16	1-1/8	282975	280975
3/4	10 NC	H5	3	4-1/4	1-1/4	282056	281056

Package Quantities: No 6-10, 1/4" = 12/pkg; 5/16" to 1/2" = 6/pkg; 5/8" to 3/4" = 3/pkg

CNC HEAVY DUTY SPIRAL POINT METRIC TAPS

List No. 3112-MHD

Metric Sizes

Tap Size	Pitch (mm)	# of Flutes	Pitch Dia.	Overall Length	Thread Length	3112-MHD Plug
M3	0.5	2	D3	2	3/8	272544
M4	0.7	3	D4	2-1/8	3/8	272546
M5	0.8	3	D4	2-3/8	1/2	272548
M6	1	3	D5	2-1/2	5/8	272550
M8	1.25	3	D5	2-23/32	11/16	272552
M10	1.5	3	D6	2-15/16	3/4	272554
M12	1.75	3	D6	3-3/8	15/16	272556

Package Quantities: M3 to M6 = 12/pkg; M8 to M12 = 6/pkg

SPIRAL POINTED TAPS - GENERAL PURPOSE



SPIRAL FLUTED HAND TAPS

Ground Thread / High Speed Steel / Regular Helix 30°

List No. 5150

List No. TN-5150 VERTANIUM® Coated

Machine Screw and Fractional Sizes



- Plug chamfer for through hole applications
- Bottoming chamfer to thread close to an obstruction or blind hole
- Ground threads
- Slow spiral for maximum chip space & chip evacuation in blind holes

Tap Size	TPI	Pitch Dia.	# of Flutes	Overall Length	Thread Length	5150 Plug	5150 Bottoming	TN-5150 Plug	TN-5150 Bottoming
4	40 NC	H2	2	1-7/8	9/16	365676	365678	365675	365677
6	32 NC	H3	2	2	11/16	365648	365655	365679	365680
8	32 NC	H3	2	2-1/8	3/4	365689	365697	365685	365693
10	24 NC	H3	2	2-3/8	7/8	365721	365739	365727	365735
10	32 NF	H3	2	2-3/8	7/8	365747	365754	365743	365750
1/4	20 NC	H3	2	2-1/2	1	366307	366315		
1/4	20 NC	H3	3	2-1/2	1	366323	366331	366329	366337
1/4	28 NF	H3	3	2-1/2	1	366364	366372	366360	366378
5/16	18 NC	H3	3	2-23/32	1- 1/8	366406	366414	366402	366410
5/16	24 NF	H3	3	2-23/32	1- 1/8	366448	366455	366444	366451
3/8	16 NC	H3	3	2-15/16	1- 1/4	366463	366471	366469	366477
3/8	24 NF	H3	3	2-15/16	1- 1/4	366489	366497	366485	366493
7/16	14 NC	H3	3	3-5/32	1- 7/16	366505	366513	366501	366519
7/16	20 NF	H3	3	3-5/32	1- 7/16	366521	366538	366527	366535
1/2	13 NC	H3	3	3-3/8	1- 21/32	366547	366554	366543	366550
1/2	20 NF	H3	3	3-3/8	1- 21/32	366562	366570	366568	366576

SPIRAL FLUTED HAND TAPS

Ground Thread / High Speed Steel / High Helix 49°

List No. 5155

List No. TN-5155 VERTANIUM® Coated

Machine Screw and Fractional Sizes



- Plug chamfer for through hole applications
- Bottoming chamfer to thread close to an obstruction or blind hole
- Ground threads
- High spiral for maximum shearing action
- Spiral flute for better chip evacuation in blind holes & for interrupted conditions
- TiN coated for higher speeds & wear resistance

Tap Size	TPI	Pitch Dia.	# of Flutes	Overall Length	Thread Length	5155 Plug	5155 Bottoming	TN-5155 Plug	TN-5155 Bottoming
3	48 NC	H2	2	1-13/16	1/2	367107	367115		
4	40 NC	H2	2	1-7/8	9/16	367149	367156	367145	367152
5	40 NC	H2	2	1-15/16	5/8	367180	367198		
6	32 NC	H3	3	2	11/16	367222	367230	367228	367236
8	32 NC	H3	3	2-1/8	3/4	367263	367271	367269	367278
10	24 NC	H3	3	2-3/8	7/8	367305	367313	367302	367320
10	32 NF	H3	3	2-3/8	7/8	367321	367339	367327	367335

continued on next page



VERMONT TAP & DIE

List No. 5155

List No. TN-5155 VERTANIUM® Coated ... continued

Tap Size	TPI	Pitch Dia.	# of Flutes	Overall Length	Thread Length	5155 Plug	5155 Bottoming	TN-5155 Plug	TN-5155 Bottoming
12	24	NC	H3	3	2-3/8	15/16	367347	367354	
1/4	20	NC	H3	3	2-1/2	1	367909	367917	367905 367913
1/4	28	NF	H3	3	2-1/2	1	367925	367933	367921 367939
5/16	18	NC	H3	3	2-23/32	1-1/8	367941	367958	367947 367954
5/16	24	NF	H3	3	2-23/32	1-1/8	367966	367974	367962 367970
3/8	16	NC	H3	3	2-15/16	1-1/4	367982	367990	367988 367996
3/8	16	NC	H5	3	2-15/16	1-1/4	-	-	368341 368358
3/8	24	NF	H3	3	2-15/16	1-1/4	368006	368014	368038 368039
7/16	14	NC	H3	3	3-5/32	1-7/16	368022	368030	368043 368036
7/16	20	NF	H3	3	3-5/32	1-7/16	368048	368055	- -
1/2	13	NC	H3	3	3-3/8	1-21/32	368063	368071	368069 368077
1/2	20	NF	H3	3	3-3/8	1-21/32	368089	368097	- -
5/8	11	NC	H3	4	3-13/16	1-13/16	368147	368154	368145 368091

Package Quantities: No 3-10, 1/4" = 12/pkg; 5/16" to 1/2" = 6/pkg; 5/8" = 3/pkg

METRIC SPIRAL FLUTED TAPS

Ground Thread / High Speed Steel / High Helix 49°

List No. 5155-M

Metric Sizes



- Plug chamfer for through hole applications
- Bottoming chamfer to thread close to an obstruction or blind hole
- Ground threads
- High spiral for maximum shearing action
- Spiral flute for better chip evacuation in blind holes & for interrupted conditions
- Pitch diameter limits for ISO Class 6H (medium fit)

Tap Size	Pitch (mm)	Pitch Dia	# of Flutes	Overall Length	Thread Length	5155-M Plug	5155-M Bottoming
M3	0.5	D3	2	1-15/16	5/8	366110	366112
M3.5	0.6	D4	3	2	11/16	366120	366122
M4	0.7	D4	3	2-1/8	3/4	366130	366132
M5	0.8	D4	3	2-3/8	7/8	366140	366142
M6	1	D5	3	2-1/2	1	366150	366152
M8	1.25	D5	3	2-23/32	1-1/8	366160	366162
M10	1.5	D6	3	2-15/16	1-1/4	366170	366172
M12	1.75	D6	3	3-3/8	1-21/32	366180	366182

Package Quantities: M3 to M6 = 12/pkg; M8 to M12 = 6/pkg



CNC SPIRAL FLUTED TAPS

Ground Thread / Premium HSS / Heavy Duty

List No. TN-5155-HD VERTANIUM® Coated

Machine Screw and Fractional Sizes

- Designed to tap blind holes in hard materials up to 30 Rc
- Manufactured with premium HSS
- TiN coated for higher speeds and wear resistance
- Plug chamfer for through hole applications
- Bottoming chamfer to thread close to an obstruction or blind hole



Tap Size	TPI	Pitch Dia.	# of Flutes	Overall Length	Thread Length	TN-5155-HD	TN-5155-HD
						Plug	Bottoming
6	32 NC	H3	3	2	3/8	281957	282005
8	32 NC	H3	3	2-1/8	3/8	282054	282104
10	24 NC	H3	3	2-3/8	1/2	282062	282120
10	32 NF	H3	3	2-3/8	1/2	282153	282203
10	32 NF	H5	3	2-3/8	1/2	282179	282229
1/4	20 NC	H3	3	2-1/2	5/8	282252	282302
1/4	20 NC	H5	3	2-1/2	5/8	282278	282328
1/4	28 NF	H3	3	2-1/2	5/8	282351	282401
5/16	18 NC	H3	3	2-23/32	11/16	282450	282501
5/16	18 NC	H5	3	2-23/32	11/16	282542	282518
5/16	24 NF	H3	3	2-23/32	11/16	282468	282526
3/8	16 NC	H3	3	2-15/16	3/4	282559	282609
3/8	16 NC	H5	3	2-15/16	3/4	282641	282617
3/8	24 NF	H3	3	2-15/16	3/4	282567	282625
7/16	14 NC	H3	3	3-5/32	7/8	282658	282708
1/2	13 NC	H3	3	3-3/8	15/16	282757	282807
1/2	13 NC	H5	3	3-3/8	15/16	282799	282815
1/2	20 NF	H3	3	3-3/8	15/16	282765	282823
5/8	11 NC	H3	4	3-13/16	1-1/8	282856	282906
5/8	11 NC	H5	4	3-13/16	1-1/8	282872	282922

Package Quantities: No 6-10, 1/4" = 12/pkg; 5/16" to 1/2" = 6/pkg; 5/8" 3/pkg



VERMONT TAP & DIE

CNC FORMING TAPS

Ground Thread / High Speed Steel

List No. 1986

List No. TN-1986 VERTANIUM® Coated

Machine Screw and Fractional Sizes



- Plug chamfer for through hole applications (4 threads)
- Bottoming chamfer to thread close to an obstruction or blind hole (2 threads)
- Ground threads
- Form tap style eliminates chips, increases thread strength & enables higher tapping speeds
- Lube grooves No. 5 and larger ensure maximum lubrication during tapping
- TiN coated for higher speeds & wear resistance
- Form taps require a larger drilled hole size prior to tapping than corresponding cutting taps.

>> For tap drill recommendations, see Table #10 in technical information section.

Tap Size	TPI	Pitch Dia	OA Length	Thread Length	1986 Plug	1986 Bottoming	TN-1986 Plug	TN-1986 Bottoming
4	40	NC	H3	1-7/8	9/16	289004	289012	
4	40	NC	H5	1-7/8	9/16	289020	289038	
4	48	NF	H3	1-7/8	9/16	289046	289053	
5	40	NC	H3	1-15/16	5/8	289087	289095	
5	40	NC	H5	1-15/16	5/8	—	289111	
6	32	NC	H3	2	3/8	289202	289210	287004 287053
6	32	NC	H5	2	3/8	289228	289236	287103 287152
6	32	NC	H10	2	3/8	289244	289251	
6	40	NF	H3	2	3/8	289160	289178	
6	40	NF	H5	2	3/8	289186	289194	
8	32	NC	H3	2-1/8	3/8	289269	289277	287202 287251
8	32	NC	H5	2-1/8	3/8	289285	289293	287301 287350
8	32	NC	H10	2-1/8	3/8	289301	289319	
8	36	NF	H3	2-1/8	3/8	—	289335	
8	36	NF	H5	2-1/8	3/8	289343	289350	
10	24	NC	H4	2-3/8	1/2	289368	289376	287400 287459
10	24	NC	H6	2-3/8	1/2	289384	289392	287509 287558
10	32	NF	H4	2-3/8	1/2	289426	289434	
10	32	NF	H6	2-3/8	1/2	289442	289459	287608 287657
10	32	NF	H10	2-3/8	1/2	289467	—	
1/4	20	NC	H4	2-1/2	5/8	289525	289533	287665 287634
1/4	20	NC	H6	2-1/2	5/8	289541	289558	287707 287756
1/4	20	NC	H10	2-1/2	5/8	289566	—	
1/4	28	NF	H4	2-1/2	5/8	289582	289590	
1/4	28	NF	H6	2-1/2	5/8	289608	289616	287806 287855
5/16	18	NC	H5	2-23/32	11/16	289640	289657	
5/16	18	NC	H7	2-23/32	11/16	289665	289673	287905 287954
5/16	18	NC	H10	2-23/32	11/16	—	289699	
5/16	24	NF	H5	2-23/32	11/16	289707	289715	
5/16	24	NF	H7	2-23/32	11/16	289723	289731	288002 288051

continued on next page



List No. 1986

List No. TN-1986 VERTANIUM® Coated . . . *continued*

Tap Size	TPI	Pitch Dia	OA Length	Thread Length	1986 Plug	1986 Bottoming	TN-1986 Plug	TN-1986 Bottoming
3/8	16	NC	H5	2-15/16	3/4	289764	289772	
3/8	16	NC	H7	2-15/16	3/4	289780	289798	288101 288150
3/8	24	NF	H5	2-15/16	3/4	289822	289830	
3/8	24	NF	H7	2-15/16	3/4	—	289855	288200 288259
7/16	14	NC	H5	3-5/32	7/8	289889	289897	
7/16	14	NC	H8	3-5/32	7/8	—	289913	288309 288358
7/16	20	NF	H5	3-5/32	7/8	289921	289939	
7/16	20	NF	H8	3-5/32	7/8	—	289954	
1/2	13	NC	H5	3-3/8	15/16	289962	289970	
1/2	13	NC	H8	3-3/8	15/16	289988	289996	288408 288457
1/2	20	NF	H5	3-3/8	15/16	290002	290010	

Package Quantities: No 4-10, 1/4" = 12/pkg; 5/16" to 1/2" = 6/pkg
See technical pages for tap/drill sizes.

CNC FORMING METRIC TAPS

Ground Thread / High Speed Steel

List No. 1986-M

List No. TN-1986-M VERTANIUM®

Metric Sizes



- Plug chamfer for through hole applications (4 threads)
- Bottoming chamfer to thread close to an obstruction or blind hole (2 threads)
- Ground threads
- Form tap style eliminates chips, increases thread strength & enables higher tapping speeds
- Lube grooves ensure maximum lubrication during tapping
- TiN coated for higher speeds & wear resistance
- Pitch diameter limits for ISO Class 6H (medium fit)

>> For tap drill recommendations, see Table #11 in technical information section.

Tap Size	Pitch (mm)	Pitch Dia	OA Length	Thread Length	1986-M Plug	1986-M Bottoming	TN-1986-M Plug	TN-1986-M Bottoming
M3	0.5	D5	1-15/16	5/8	291001	291018	291006	291014
M4	0.7	D6	2-1/8	3/8	291083	291091	291089	291097
M5	0.8	D7	2-3/8	1/2	291125	291133	291123	291139
M6	1	D8	2-1/2	5/8	291166	291174	291162	291170
M8	1.25	D9	2-23/32	11/16	291240	291257	291246	291253
M10	1.5	D10	2-15/16	3/4	291176	291178	291287	291295
M12	1.75	D11	3-3/8	15/16	291179	291181	291180	291182

Package Quantities: M3 to M6 = 12/pkg; M8 to M12 = 6/pkg
See technical pages for tap/drill sizes.



TAPER PIPE TAPS

Ground Thread / High Speed Steel / Regular Full Thread

List No. 3180

List No. TN-3180 VERTANIUM® Coated

NPT, NPTF

- Medium hook for general purpose
- Ground threads
- Small shank available 1/8"
- NPT/NPTF thread design
- TiN coated for higher speeds & wear resistance
- NPT can be used in ANPT applications



Tap Size	TPI	# of Flutes	Overall Length	Thread Length	3180 NPT	3180 NPTF	TN-3180 NPT	TN-3180 NPTF
1/16	27	4	2-1/8	11/16	385307	385323	385328	385329
1/8*	27	4	2-1/8	3/4	385331	385356	385357	385359
1/8	27	4	2-1/8	3/4	385364	385380	385385	385386
1/4	18	4	2-7/16	1-1/16	385398	385413	385409	385410
3/8	18	4	2-9/16	1-1/16	385422	385448	385443	385444
1/2	14	4	3-1/8	1-3/8	385455	385471	385458	385477
3/4	14	5	3-1/4	1-3/8	385489	385505	385500	385501
1	11-1/2	5	3-3/4	1-3/4	385513	385539	385534	385536
1-1/4	11-1/2	5	4	1-3/4	385547	385562	385680	385685
1-1/2	11-1/2	7	4-1/4	1-3/4	385570	385596	385681	385686
2	11-1/2	7	4-1/2	1-3/4	385604	385620	385682	385687

Package Quantities: 1/16" to 3/8" = 6/pkg; 1/2" to 3/4" = 3/pkg; 1" and over 1/pkg

*Small shank diameter

CNC EXTRA LENGTH TAPER PIPE TAPS

Ground Thread / High Speed Steel (w/Hand Tap Shanks)

Regular Full Thread

List No. 3180-E

List No. TN-3180-E VERTANIUM® Coated

NPTF

- Medium hook design for general purpose applications
- Ground threads
- Extra length permits access to recessed areas
- Standard hand tap shank dimensions



Tap Size	TPI	# of Flutes	Overall Length	Thread Length	Shank Diameter	3180-E NPTF	3180-E NPT	TN-3180-E NPTF
1/8	27	4	3	3/4	0.318	386008	384524	386129
1/4	18	4	3-1/2	1-1/16	0.480	386024	384525	386152
3/8	18	4	3-3/4	1-1/16	0.480	386040	384526	386186
1/2	14	4	4-3/8	1-3/8	0.480	386065	384527	386210
3/4	14	5	4-5/8	1-3/8	0.800		384528	
1-11	1/2	5	5-1/4	1-3/4	0.800		384529	

Package Quantities: 1/8" = 6/pkg; 1/4" to 1/2" = 3/pkg; 3/4" and over = 1/pkg



TAPER PIPE TAP

Ground Thread / High Speed Steel / Interrupted Thread

List No. 3182

List No. TN-3182 VERTANIUM® Coated

NPT, NPTF



- Medium hook design for general purpose applications
- Ground threads
- Interrupted thread for improved thread finish and reducing drag
- Small shank available 1/8"
- NPT/NPTF thread design
- TiN coated for higher speeds & wear resistance

Tap Size	TPI	# of Flutes	Overall Length	Thread Length	3182 NPT	3182 NPTF	TN-3182 NPTF
1/8*	27	5	2-1/8	3/4	385703	385729	
1/8	27	5	2-1/8	3/4	385737	385752	385755
1/4	18	5	2-7/16	1-1/16	385760	385786	385789
3/8	18	5	2-9/16	1-1/16	385794	385810	385813
1/2	14	5	3-1/8	1-3/8	385828	385844	385847
3/4	14	5	3-1/4	1-3/8	385851	385877	385870
1	11-1/2	5	3-3/4	1-3/4	385885	385901	385904
1-1/4	11-1/2	5	4	1-3/4	385919	—	
1-1/2	11-1/2	7	4-1/4	1-3/4	385943	—	

Package Quantities: 1/16" to 3/8" = 6/pkg; 1/2" to 3/4" = 3/pkg; 1" and over 1/pkg

*Small shank diameter


TAPER PIPE TAPS

Ground Thread / High Speed Steel / High Hook / Regular Full Thread

List No. 3183 Bright Finish

List No. S-3183 Surface Treated

NPT, NPTF

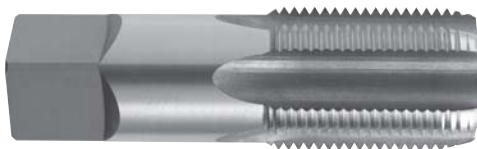

- High hook design for soft material applications
- Ground threads
- NPT/NPTF thread design
- Surface treated with steam oxide to prevent galling while tapping ductile materials
- NPT can be used in ANPT applications

Tap Size	TPI	# of Flutes	OA Length	Thread Length	3183 NPT	3183 NPTF	3183-S NPT	3183-S NPTF
1/8	27	4	2-1/8	3/4	916206	916211	919700	919705
1/4	18	4	2-7/16	1-1/16	916213	916216	919715	919725
3/8	18	4	2-9/16	1-1/16	916218	916221	919735	919727
1/2	14	4	3-1/8	1-3/8	916223	916226	919745	919750
3/4	14	5	3-1/4	1-3/8	916228	916231	919765	919755
1	11-1/2	5	3-3/4	1-3/4	916233	916236		

Package Quantities: 1/8" to 3/8" = 6/pkg; 1/2" to 3/4" = 3/pkg; 1" and over 1/pkg



STRAIGHT PIPE TAPS

Ground Thread / High Speed Steel

List No. 3181

NPS, NPSM, NPSC

- Medium hook design for general purpose applications
- Ground threads
- Straight flutes
- Use for NPSC and NPSM applications



Tap Size	TPI	# of Flutes	OA Length	Thread Length	3181 NPS/NPSM NPSC
1/8*	27	4	2-1/8	3/4	387105
1/8	27	4	2-1/8	3/4	387113
1/4	18	4	2-7/16	1-1/16	387121
3/8	18	4	2-9/16	1-1/16	387139
1/2	14	4	3-1/8	1-3/8	387147
3/4	14	5	3-1/4	1-3/8	387154
1	11-1/2	5	3-3/4	1-3/4	387162

Package Quantities: 1/8" to 3/8" = 6/pkg; 1/2" to 3/4" = 3/pkg; 1" and over 1/pkg

* Small shank diameter

STRAIGHT DRYSEAL PIPE TAPS

Ground Thread / High Speed Steel

List No. 3181-D

NPSF

- Medium hook design for general purpose applications
- Ground threads
- Straight flutes
- NPSF dryseal thread design



Tap Size	TPI	# of Flutes	OA Length	Thread Length	3181-D NPSF
1/8*	27	4	2-1/8	3/4	387212
1/8	27	4	2-1/8	3/4	387220
1/4	18	4	2-7/16	1-1/16	387238
3/8	18	4	2-9/16	1-1/16	387246
1/2	14	4	3-1/8	1-3/8	387253
3/4	14	5	3-1/4	1-3/8	387261
1	11-1/2	5	3-3/4	1-3/4	387279

Package Quantities: 1/8" to 3/8" = 6/pkg; 1/2" to 3/4" = 3/pkg; 1" and over 1/pkg

*Small shank diameter



HEXAGON RETHREADING DIES

Carbon Steel

List No. 280

Fractional Sizes



- Used in repair work for dressing over bruised and rusty threads
- Can be used in free machining materials

Die Size	TPI	Hex Size Across Flat	Die Thickness	280 EDP No.
5/16	18 NC	11/16	5/16	403124
5/16	24 NF	11/16	5/16	403132
3/8	16 NC	25/32	3/8	403140
7/16	14 NC	7/8	7/16	403165
7/16	20 NF	7/8	7/16	403173
1/2	13 NC	1-1/16	1/2	403181
1/2	20 NF	1-1/16	1/2	403199
5/8	11 NC	1-1/4	5/8	403223
3/4	10 NC	1-7/16	3/4	403264
7/8	9 NC	1-5/8	7/8	403280
1	8 NC	1-13/16	1	403306

Also available as special in left hand, special thread pitch, special sizes, and in high speed steel.

Package Quantities: all dies = 1/pkg

ROUND ADJUSTABLE DIES

High Speed Steel

List No. 2290

Machine Screw and Fractional Sizes



- Will cut external threads when held in a die stock
- Will produce (UN) thread form
- Adjustable for wear & size
- One side of the die has a 2 to 3 thread chamfer for threading, the other side has a 1 to 1-1/2 thread chamfer for threading close to a shoulder

Die Size	TPI	O.D. x Thickness	2290 EDP No.
1/4	20	1" O.D. x 3/8" thick	400302
3/8	16	1" O.D. x 3/8" thick	400344

Packaging Quantities: all dies = 1/pkg

SOLID ROUND DIES FOR TAPER PIPE

Carbon Steel

List No. 290

NPT Sizes



- To repair external pipe threads when held in a die stock
- Will produce NPT thread form

Die Size	TPI	O.D. x Thickness	290 NPT EDP No.
1/8	27	1" O.D. x 3/8" thick	405202
1/4	18	2" O.D. x 5/8" thick	405301

Sizes other than shown are available as special. Pipe dies with straight threads for garden hose threads, etc., are available as special. Dies for all pipe sizes manufactured from high speed steel are available as special.

Packaging Quantities: all dies = 1/pkg



DIE STOCKS

For Round Adjustable Dies

■ Made from steels for added toughness



Die Stock #	Capacity Die O.D.	OA Length	EDP No.
1852	1	9	420522
1853	1-1/2	14	420548
1857	2	23	420555

T-HANDLE TAP WRENCHES

■ Made from steels for added toughness



Tap Wrench #	Type of Handle	Capacity - Tap Size		Body Length	EDP No.
		Fract.	Mach.Sc.		
328	Sliding	1/16 - 1/4	0-14	2-3/4	420803
332	Sliding	7/32 - 1/2	12-14	3-5/8	420829
336	Stationary	1/16 - 1/4	0-14	8-3/4	420845
338	Ratchet	1/16 - 1/4	0-14	3-3/4	420860
339	Ratchet	7/32 - 1/2	12-14	5	420878

ADJUSTABLE TAP and REAMER WRENCHES



Wrench Number	Capacity - Tap Size Fract	Capacity - Tap Size		Hand Reamer	Body Length	EDP No.
		Machine Screw	Pipe			
5	5/32 - 1/2	7-14	1/8	11/64 - 7/16	11	420936
6	5/32 - 3/4	7-14	1/8 - 1/4	11/64 - 41/64	15	420944
7	1/4 - 1-1/8	-	1/8 - 3/4	9/32 - 29/32	19	420951



VERMONT TAP FACTS: TYPES OF TAPS

Straight Fluted Hand Taps

These are general purpose taps used for a wide variety of hand and machine tapping applications. They are available, in most cases, in taper, plug, semi-bottoming, and bottoming chamfers and in various numbers of flutes.

Spiral Pointed Taps

These taps have a special angular grind at the point which shears chips and drives them ahead of the tap. Advantages are reduced tapping torque and increased speed in through hole tapping.

Spiral Fluted Taps

These taps are manufactured with spiral flutes for increased chip clearing efficiency in soft materials in which stringy chips are generated. Especially useful in tapping deep or blind holes, and in bridging keyways, these taps are available with regular or high helix flutes.

Fluteless or Forming Taps

Forming taps generate threads by displacing rather than cutting metal, thereby eliminating or greatly reducing chips. They are especially useful for applications in which chips cannot be tolerated. CNC Forming taps are designed to allow tapping harder and tougher materials than have been successfully tapped with other forming taps.

Extra Length Taps


Vermont Tap and Die produces, as standard and special, five different types of taps with extra long shanks that permit tapping in deep or obstructed areas. They are extension taps, pulley taps, nut taps, taper taps and taper pipe taps (extra length). Of these, nut taps, taper taps, and extension taps 7/16" and larger have shank diameters smaller than the minor diameter of the nut being tapped.

Pipe Taps

Taps for internal threading of pipe, pipe fittings, or holes in which threaded pipe is to be assembled are pipe taps. The types of pipe taps manufactured by Vermont Tap and Die as standard include: Taper Pipe Taps in regular or interrupted thread; Extra Length Taper Pipe Taps in regular or interrupted thread; and Straight Pipe Taps. Interrupted thread pipe taps are manufactured with alternate teeth removed on adjacent lands (with the exception of the first few threads at the point). Designed for tapping certain tough metals or those which tend to tear or load the cutting teeth, these taps are to be used only when regular full thread taps fail.



VERMONT TAP FACTS: CHAMFER STYLES

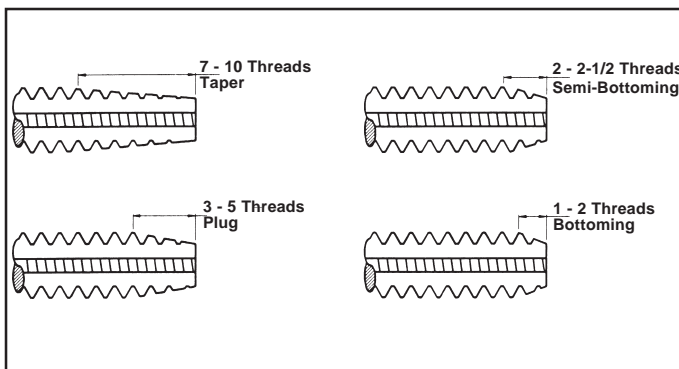

All taps have a certain number of threads at the starting end chamfer ground and relieved. This chamfer helps to guide the tap into the hole and also serves to distribute the cutting action over as many threads as possible. There are four standard styles of tap chamfer — taper, plug, semi-bottoming, and bottoming — with a different number of threads chamfered in each case. Each is designed for a different type of hole situation.

Taper taps have 7 to 10 threads chamfered and are designed for threading through holes.

Plug taps have 3 to 5 threads chamfered and are most widely used in through holes and in blind holes that do not have to be threaded all the way to the bottom. Although most hand taps are available in taper, plug, and bottoming styles, some taps, such as pipe taps, are available only in the plug chamfer.

Semi-bottoming taps have 2 to 2-1/2 threads chamfered and are designed for both through and blind hole tapping.

Bottoming taps have 1 to 2 threads chamfered, and are designed to thread blind holes close to the bottom.



NUMBER OF FLUTES

Cutting taps (as opposed to forming taps which do not cut metal or produce chips) are manufactured with a number of flutes running the length of their thread sections. These flutes have two functions: ground perpendicular to the tap threads as they are, they provide the teeth which cut into the object being threaded; and they provide channels along which the metal chips produced in thread cutting can escape from the workpiece. Generally speaking, increasing the number of flutes increases the number of cutting faces presented to the work piece, thereby distributing the cutting action over a greater number of teeth and reducing the wear on each tooth.

The basic number of flutes for most standard hand tap sizes from No. 8 through 1" is four, but for applications in which greater land strength or greater chip clearing ability is required (as in the case of tough, stringy metals), two and three fluted taps are available as optional standards. Two and three fluted taps are provided as standard in the spiral pointed and spiral fluted tap lines while standard pipe taps, in the larger sizes, are manufactured with as many as eight flutes.

THREAD PITCH DIAMETER LIMITS

The basic pitch diameter of any given thread size is equivalent to both the maximum pitch diameter of all screws manufactured to that size and to the minimum pitch diameter of any nut of that size. However, since basic pitch diameter is a theoretical figure which cannot be attained under production conditions, it is primarily a control point from which standardized deviations or tolerances are established.

Accordingly, since basic pitch diameter is the same as minimum pitch diameter of internally threaded objects such as nuts, standard taps in a given size are manufactured to various different size levels that produce dimensions greater than that of basic pitch diameter. For instance, the basic pitch diameter of a 1/4-20 screw thread is .2175, but a 1/4-20 tap produced to the tolerances of G H3 limits has a pitch diameter tolerance range of .2185 to .2190. Pitch diameter limits for taps through 1" in diameter follow.

- H1 basic to basic plus .0005"
- H2 basic plus .0005" to basic plus .0010"
- H3 basic plus .0010" to basic plus .0015"
- H4 basic plus .0015" to basic plus .0020"
- H5 basic plus .0020" to basic plus .0025"
- H6 basic plus .0025" to basic plus .0030"

TECHNICAL DATA

Of most importance to successful hole tapping is the information for determining the correct tap/drill sizes given for thread cutting taps in Table #15. The same information for forming taps can be found in Table #10. In addition, specific recommendations regarding tapping in different types of material can be found in Table #13.

SCREW THREAD CLASSES OF FIT

Three classes of fit have been established for screw threads in the unified system which permit the making of standard recommendations that relate screw thread class of fit to specific tap tolerance limits.

The class of fit of two threaded members such as a nut and a bolt is expressed by a symbol containing a number and a letter as

part of the thread designation. The number, 1 through 3, expresses the class of fit while the letter "A" or "B" respectively expresses whether external or internal threads are involved. In the example "1/2-13 UNC-2B", 2B expresses the class of fit for an internal thread.

Class 1A External and Class 1B Internal Threads

This class of fit is intended to apply to the manufacture of threaded parts where frequent quick assembly is necessary or desired. A wide allowance, or difference, between basic pitch diameter and maximum pitch diameter, is provided to permit the loose assembly.

Class 2A External and Class 2B Internal Threads

This class of fit is medium loose and is intended to apply to screws, bolts, and nuts for general fastener use. This allowance will permit freedom of fit to prevent seizure in assembly and will allow limited plating and coating.

Class 3A External and Class 3B Internal Threads

This class of fit is intended for thread assembly where closeness of fit and accuracy of thread angle and lead are required. This close fit can be obtained consistently only by use of high quality tooling and equipment and a highly efficient system of gaging and inspection.

Unified threads, American threads, and UNJ threads have the same tap thread form so that Unified and American threaded parts are mechanically interchangeable.

UNJ internal threads are produced with taps with standard thread form. Radius root applies only to the externally threaded member. Special oversize minor diameter (drilled hole) is required in UNJ threads. Refer to MIL-S-8879A which is the industry standard for the UNJ thread.

PITCH DIAMETER LIMIT RECOMMENDATIONS

The chart on the next page lists recommendations of specific taps by pitch diameter limit in each thread size for each class of fit. The recommended tap in each case should provide the required class of fit under good tapping conditions. There are some conditions, however, such as a tendency to oversize tapping, that may necessitate the selection of an alternate pitch diameter limit. Generally, if only the first few holes gage loose and can be tolerated, it is best to use the recommended pitch diameter limit in order to secure maximum tap life.

Pitch diameters shown under "Min/All Classes (Basic)" are those for the thread gage GO member. Pitch diameters shown under the four "Max" classes are those for the HI or NO GO member. If only the class of fit is shown on orders, taps with corresponding limits as shown on this chart will be furnished. If only ground thread is specified, taps with the limit for Class 2B or 3B fit will be furnished.

In very abrasive material, improved tap life can be realized by using taps with one pitch diameter limit higher than recommended in the chart. The first few holes tapped may gage a little loose, but after wear land has developed, good gaging will usually follow.

There are several factors other than the pitch diameter limit in maintaining good gaging. High flute hook, high chamfer relief, and high thread relief as well as spindle run-out, misalignment, over-feeding, in or out, and incorrect tapping speeds can all cause oversize gaging. On the other hand, some materials tend to expand under comparatively low heat conditions and to close up the tapped hole, which will result in tight gaging. (continued on next page)



PITCH DIAMETER LIMIT RECOMMENDATIONS (continued)

Some high production tapping machines cause the tap to stop on reversing about one thread from the top of the hole and pull out without turning. This causes distortion of the top thread that may

restrict the GO gage. If gaging problems persist, call your Vermont representative or the Technical Service Department at Vermont Tap & Die.

TECHNICAL TABLES

TABLE #1 TAP RECOMMENDATIONS FOR CLASSES 2, 3, 2B & 3B UNIFIED AND AMERICAN NATIONAL SCREW THREADS

SIZE	THREADS PER INCH		RECOMMENDED TAP LIMITS				INTERNAL THREAD PITCH DIAMETER LIMITS				
	NC UNC	NF UNF	CLASS 2	CLASS 3	CLASS 2B	CLASS 3B	MIN/ALL CLASSES (BASIC)	MAX CLASS 2	MAX CLASS 3	MAX CLASS 2B	MAX CLASS 3B
0		80	G H1	G H1	G H2	G H1	.0519	.0536	.0532	.0542	.0536
1	64		G H1	G H1	G H2	G H1	.0629	.0648	.0643	.0655	.0648
1		72	G H1	G H1	G H2	G H1	.0640	.0658	.0653	.0665	.0659
2	56		G H1	G H1	G H2	G H1	.0744	.0764	.0759	.0772	.0765
2		64	G H1	G H1	G H2	G H1	.0759	.0778	.0773	.0786	.0779
3	48		G H1	G H1	G H2	G H1	.0855	.0877	.0871	.0885	.0877
3		56	G H1	G H1	G H2	G H1	.0874	.0894	.0889	.0902	.0895
4	40		G H2	G H1	G H2	G H2	.0958	.0982	.0975	.0991	.0982
4		48	G H1	G H1	G H2	G H1	.0985	.1007	.1001	.1016	.1008
5	40		G H2	G H1	G H2	G H2	.1088	.1112	.1105	.1121	.1113
5		44	G H1	G H1	G H2	G H1	.1102	.1125	.1118	.1134	.1126
6	32		G H2	G H1	G H3	G H2	.1177	.1204	.1196	.1214	.1204
6		40	G H2	G H1	G H2	G H2	.1218	.1242	.1235	.1252	.1243
8	32		G H2	G H1	G H3	G H2	.1437	.1464	.1456	.1475	.1465
8		36	G H2	G H1	G H2	G H2	.1460	.1485	.1478	.1496	.1487
10	24		G H3	G H1	G H3	G H3	.1629	.1662	.1653	.1672	.1661
10		32	G H2	G H1	G H3	G H2	.1697	.1724	.1716	.1736	.1726
12	24		G H3	G H1	G H3	G H3	.1889	.1922	.1913	.1933	.1922
12		28	G H3	G H1	G H3	G H3	.1928	.1959	.1950	.1970	.1959
1/4	20		G H3	G H2	G H5	G H3	.2175	.2211	.2201	.2223	.2211
1/4		28	G H3	G H1	G H4	G H3	.2268	.2299	.2290	.2311	.2300
5/16	18		G H3	G H2	G H5	G H3	.2764	.2805	.2794	.2817	.2803
5/16		24	G H3	G H1	G H4	G H3	.2854	.2887	.2878	.2902	.2890
3/8	16		G H3	G H2	G H5	G H3	.3344	.3389	.3376	.3401	.3387
3/8		24	G H3	G H1	G H4	G H3	.3479	.3512	.3503	.3528	.3516
7/16	14		G H5	G H3	G H5	G H3	.3911	.3960	.3947	.3972	.3957
7/16		20	G H3	G H1	G H5	G H3	.4050	.4086	.4076	.4104	.4091
1/2	13		G H5	G H3	G H5	G H3	.4500	.4552	.4537	.4565	.4548
1/2		20	G H3	G H1	G H5	G H3	.4675	.4711	.4701	.4731	.4717
9/16	12		G H5	G H3	G H5	G H3	.5084	.5140	.5124	.5152	.5135
9/16		18	G H3	G H2	G H5	G H3	.5264	.5305	.5294	.5323	.5308
5/8	11		G H5	G H3	G H5	G H3	.5660	.5719	.5702	.5732	.5714
5/8		18	G H3	G H2	G H5	G H3	.5889	.5930	.5919	.5949	.5934
3/4	10		G H5	G H3	G H5	G H5	.6850	.6914	.6895	.6927	.6907
3/4		16	G H3	G H2	G H5	G H3	.7094	.7139	.7126	.7159	.7143
7/8	9		G H6	G H4	G H6	G H4	.8028	.8098	.8077	.8110	.8089
7/8		14	G H4	G H2	G H6	G H4	.8286	.8335	.8322	.8356	.8339
1	8		G H6	G H4	G H6	G H4	.9188	.9264	.9242	.9276	.9254
1		12	G H4	G H2	G H6	G H4	.9459	.9515	.9499	.9535	.9516
1		14 NS	G H4	G H2	G H6	G H4	.9536	.9585	.9572	.9609	.9590
1-1/8	7		G H8	G H4	G H8	G H4	1.0322	1.0407	1.0381	1.0416	1.0393
1-1/8		12	G H4	G H4	G H6	G H4	1.0709	1.0765	1.0749	1.0787	1.0768
1-1/4	7		G H8	G H4	G H8	G H4	1.1572	1.1657	1.1631	1.1668	1.1644
1-1/4		12	G H4	G H4	G H6	G H4	1.1959	1.2015	1.1999	1.2039	1.2019
1-3/8	6		G H8	G H4	G H8	G H4	1.2667	1.2768	1.2738	1.2771	1.2745
1-3/8		12	G H4	G H4	G H6	G H4	1.3209	1.3265	1.3249	1.3291	1.3270
1-1/2	6		G H8	G H4	G H8	G H4	1.3917	1.4018	1.3988	1.4022	1.3996
1-1/2		12	G H4	G H4	G H6	G H4	1.4459	1.4515	1.4499	1.4542	1.4522

NOTES: **Class 1B:** tapped holes can be produced with cut thread taps. **Class 2B:** cut thread taps may be used under normal conditions and in average materials for producing tapped holes to this classification. The above recommended taps normally produce the class of thread indicated in average materials when used with reasonable care. However, if the tap specified does not give a satisfactory gage fit in the work, a choice of some other limit tap will be necessary.



VERMONT TAP & DIE

ILLUSTRATION #1 GENERAL TAP DIMENSIONS

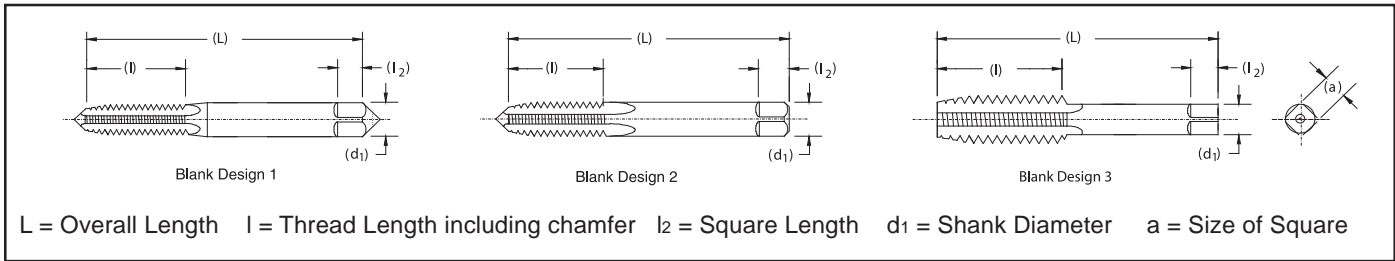


TABLE #2 USCTI TABLE 302 STANDARD TAP DIMENSIONS, GROUND THREAD

NOMINAL DIAMETER RANGE (INCHES)		TAP SIZE			STYLE	TAP DIMENSIONS (INCHES)				
		MACHINE SCREW NO.	FRACTIONAL INCHES	METRIC MILLIMETERS		OVERALL LENGTH L	THREAD LENGTH l	SQUARE LENGTH l ₂	SHANK DIAMETER d ₁	SIZE OF SQUARE a
.052	.065	0	1/16	M1.6	1	1-5/8	5/16	3/16	.141	.110
.065	.078	1		M1.8	1	1-11/16	3/8	3/16	.141	.110
.078	.091	2		M2, M2.2	1	1-3/4	7/16	3/16	.141	.110
.091	.104	3	3/32	M2.5	1	1-13/16	1/2	3/16	.141	.110
.104	.117	4			1	1-7/8	9/16	3/16	.141	.110
.117	.130	5	1/8	M3, M3.15	1	1-15/16	5/8	3/16	.141	.110
.130	.145	6		M3.5	1	2	11/16	3/16	.141	.110
.145	.171	8	5/32	M4	1	2-1/8	3/4	1/4	.168	.131
.171	.197	10	3/16	M4.5, M5	1	2-3/8	7/8	1/4	.194	.152
.197	.223	12	7/32		1	2-3/8	15/16	9/32	.220	.165
.223	.260	14	1/4	M6, M6.3	2	2-1/2	1	5/16	.255	.191
.260	.323		5/16	M7, M8	2	2-23/32	1-1/8	3/8	.318	.238
.323	.395		3/8	M10	2	2-15/16	1-1/4	7/16	.381	.286
.395	.448		7/16		3	3-5/32	1-7/16	13/32	.323	.242
.448	.510		1/2	M12, M12.5	3	3-3/8	1-21/32	7/16	.367	.275
.510	.573		9/16	M14	3	3-19/32	1-21/32	1/2	.429	.322
.573	.635		5/8	M16	3	3-13/16	1-13/16	9/16	.480	.360
.635	.709		11/16	M18	3	4-1/32	1-13/16	5/8	.542	.406
.709	.760		3/4		3	4-1/4	2	11/16	.590	.442
.760	.823		13/16	M20	3	4-15/32	2	11/16	.652	.489
.823	.885		7/8	M22	3	4-11/16	2-7/32	3/4	.697	.523
.885	.948		15/16	M24	3	4-29/32	2-7/32	3/4	.760	.570
.948	1.010		1	M25	3	5-1/8	2-1/2	13/16	.800	.600
1.010	1.073		1-1/16	M27	3	5-1/8	2-1/2	7/8	.896	.672
1.073	1.135		1-1/8		3	5-7/16	2-9/16	7/8	.896	.672
1.135	1.198		1-3/16	M30	3	5-7/16	2-9/16	1	1.021	.766
1.198	1.260		1-1/4		3	5-3/4	2-9/16	1	1.021	.766
1.260	1.323		1-5/16	M33	3	5-3/4	2-9/16	1-1/16	1.108	.831
1.323	1.385		1-3/8		3	6-1/16	3	1-1/16	1.108	.831
1.385	1.448		1-7/16	M36	3	6-1/16	3	1-1/8	1.233	.925
1.448	1.510		1-1/2		3	6-3/8	3	1-1/8	1.233	.925
1.510	1.635		1-5/8	M39	3	6-11/16	3-3/16	1-1/8	1.305	.979
1.635	1.760		1-3/4	M42	3	7	3-3/16	1-1/4	1.430	1.072
1.760	1.885		1-7/8		3	7-5/16	3-9/16	1-1/4	1.519	1.139
1.885	2.010		2	M48	3	7-5/8	3-9/16	1-3/8	1.644	1.233
2.010	2.135		2-1/8		3	8	3-9/16	1-3/8	1.769	1.327
2.135	2.260		2-1/4	M56	3	8-1/4	3-9/16	1-7/16	1.894	1.420
2.260	2.385		2-3/8		3	8-1/2	4	1-7/16	2.019	1.514
2.385	2.510		2-1/2		3	8-3/4	4	1-1/2	2.100	1.575
2.510	2.635		2-5/8	M64	3	8-3/4	4	1-1/2	2.225	1.669
2.635	2.760		2-3/4		3	9-1/4	4	1-9/16	2.350	1.762
2.760	2.885		2-7/8	M72	3	9-1/4	4	1-9/16	2.475	1.856
2.885	3.010		3		3	9-3/4	4-9/16	1-5/8	2.543	1.907
3.010	3.135		3-1/8		3	9-3/4	4-9/16	1-5/8	2.668	2.001
3.135	3.260		3-1/4	M80	3	10	4-9/16	1-3/4	2.793	2.095
3.260	3.385		3-3/8		3	10	4-9/16	1-3/4	2.883	2.162
3.385	3.510		3-1/2		3	10-1/4	4-15/16	2	3.008	2.256
3.510	3.635		3-5/8	M90	3	10-1/4	4-15/16	2	3.133	2.350
3.635	3.760		3-3/4		3	10-1/2	5-5/16	2-1/8	3.217	2.413
3.760	3.885		3-7/8		3	10-1/2	5-5/16	2-1/8	3.342	2.506
3.885	4.010		4	M100	3	10-3/4	5-5/16	2-1/4	3.467	2.600

TECHNICAL INFORMATION



TABLE #3 USCTI TABLE 303 SPECIAL FINE PITCH TAPS – SHORT SERIES

Unless otherwise specified, special taps 1.010" to 1.510" diameter inclusive, have 14 or more threads per inch or 1.75 millimeter pitch and finer. Sizes over 1.510" diameter with 10 or more threads per inch or 2.5

millimeter pitch and finer will be made to the general dimensions shown below. Standard tap dimensions are illustrated on the previous page.

NOMINAL DIAMETER RANGE (INCHES)		TAP SIZE		TAP DIMENSIONS (INCHES)				
				OVERALL LENGTH L	THREAD LENGTH l	SQUARE LENGTH l ₂	SHANK DIAMETER d ₁	SIZE OF SQUARE a
OVER	TO (INCL)	FRACTIONAL INCHES	METRIC MILLIMETERS					
1.010	1.073	1-1/16	M27	4	1-1/2	7/8	.896	.672
1.073	1.135	1-1/8		4	1-1/2	7/8	.896	.672
1.135	1.198	1-3/16	M30	4	1-1/2	1	1.021	.766
1.198	1.260	1-1/4		4	1-1/2	1	1.021	.766
1.260	1.323	1-5/16	M33	4	1-1/2	1	1.108	.831
1.323	1.385	1-3/8		4	1-1/2	1	1.108	.831
1.385	1.448	1-7/16	M36	4	1-1/2	1	1.233	.925
1.448	1.510	1-1/2		4	1-1/2	1	1.233	.925
1.510	1.635	1-5/8	M39	5	2	1-1/8	1.305	.979
1.635	1.760	1-3/4	M42	5	2	1-1/4	1.430	1.072
1.760	1.885	1-7/8		5	2	1-1/4	1.519	1.139
1.885	2.010	2	M48	5	2	1-3/8	1.644	1.233
2.010	2.135	2-1/8		5-1/4	2	1-3/8	1.769	1.327
2.135	2.260	2-1/4	M56	5-1/4	2	1-7/16	1.894	1.420
2.260	2.385	2-3/8		5-1/4	2	1-7/16	2.019	1.514
2.385	2.510	2-1/2		5-1/4	2	1-1/2	2.100	1.575
2.510	2.635	2-5/8	M64	5-1/2	2	1-1/2	2.100	1.575
2.635	2.760	2-3/4		5-1/2	2	1-1/2	2.100	1.575
2.760	2.885	2-7/8	M72	5-1/2	2	1-1/2	2.100	1.575
2.885	3.010	3		5-1/2	2	1-1/2	2.100	1.575
3.010	3.135	3-1/8		5-3/4	2	1-1/2	2.100	1.575
3.135	3.260	3-1/4	M80	5-3/4	2	1-1/2	2.100	1.575
3.260	3.385	3-3/8		5-3/4	2	1-1/2	2.100	1.575
3.385	3.510	3-1/2		5-3/4	2	1-1/2	2.100	1.575
3.510	3.635	3-5/8	M90	6	2	1-3/4	2.100	1.575
3.635	3.760	3-3/4		6	2	1-3/4	2.100	1.575
3.760	3.885	3-7/8		6	2	1-3/4	2.100	1.575
3.885	4.010	4	M100	6	2	1-3/4	2.100	1.575

TABLE #4 GENERAL TAP DIMENSION TOLERANCES

ELEMENT	NOMINAL DIAMETER RANGE (INCHES)		DIRECTION	TOLERANCE (INCHES)
	OVER	TO (INCL.)		GROUND THREAD
Length Overall - A	.052	1.010	Plus or Minus	1/32
	1.010	4.010	Plus or Minus	1/16
Length of Thread - B	.052	.223	Plus or Minus	3/64
	.223	.510	Plus or Minus	1/16
	.510	1.510	Plus or Minus	3/32
	1.510	4.010	Plus or Minus	1/8
Length of Square - C	.052	1.010	Plus or Minus	1/32
	1.010	4.010	Plus or Minus	1/16
Diameter of Shank - D	.052	.223	Minus	.0015
	.223	.635	Minus	.0015
	.635	1.010	Minus	.002
	1.010	1.510	Minus	.002
	1.510	2.010	Minus	.003
	2.010	4.010	Minus	.003
Size of Square - E	.052	.510	Minus	.004
	.510	1.010	Minus	.006
	1.010	2.010	Minus	.008
	2.010	4.010	Minus	.010



VERMONT TAP & DIE

ILLUSTRATION #2 NECKED TAPS

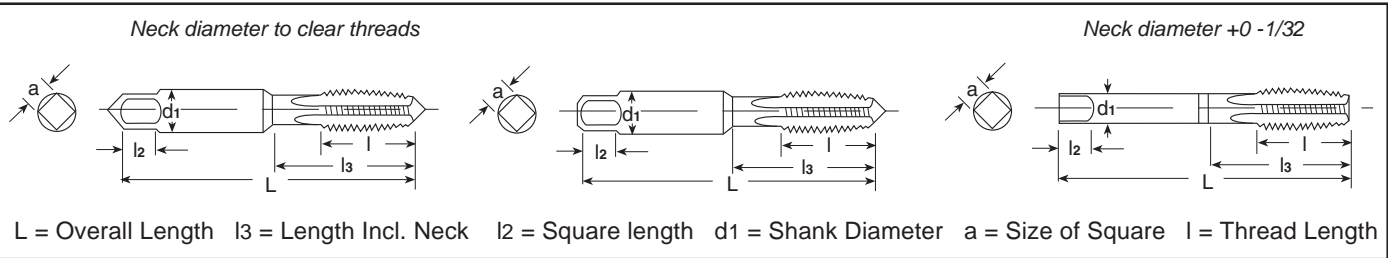


TABLE #5 USCTI TABLE 302A GENERAL TAP DIMENSIONS AND TOLERANCES
Optional Necks and Optional Shortened Thread Length

NOMINAL DIAMETER RANGE (INCHES)		TAP SIZE			STYLE	TAP DIMENSIONS (INCHES)					
OVER	TO (INCL)	MACHINE SCREW NO.	FRACTIONAL INCHES	METRIC MILLIMETERS		OVERALL LENGTH L	NECKED LENGTH *l3	SQUARE LENGTH l2	SHANK DIAMETER d1	SIZE OF SQUARE a	THREAD LENGTH **l
.104	.117	4			1	1-7/8	9/16	3/16	.141	.110	5/16
.117	.130	5	1/8	M3, M3.15	1	1-15/16	5/8	3/16	.141	.110	5/16
.130	.145	6		M3.5	1	2	11/16	3/16	.141	.110	3/8
.145	.171	8	5/32	M4	1	2-1/8	3/4	1/4	.168	.131	3/8
.171	.197	10	3/16	M4.5, M5	1	2-3/8	7/8	1/4	.194	.152	1/2
.197	.223	12	7/32		1	2-3/8	15/16	9/32	.220	.165	1/2
.223	.260	14	1/4	M6, M6.3	2	2-1/2	1	5/16	.255	.191	5/8
.260	.323		5/16	M7, M8	2	2-23/32	1-1/8	3/8	.318	.238	11/16
.323	.395		3/8	M10	2	2-15/16	1-1/4	7/16	.381	.286	3/4
.395	.448		7/16		3	3-5/32	—	13/32	.323	.242	7/8
.448	.510		1/2	M12, M12.5	3	3-3/8	—	7/16	.367	.275	15/16
.510	.573		9/16	M14	3	3-19/32	—	1/2	.429	.322	1
.573	.635		5/8	M16	3	3-13/16	—	9/16	.480	.360	1-3/32
.635	.709		11/16	M18	3	4-1/32	—	5/8	.542	.406	1-3/32
.709	.760		3/4		3	4-1/4	—	11/16	.590	.442	1-7/32
.760	.823		13/16	M20	3	4-15/32	—	11/16	.652	.489	1-7/32
.823	.885		7/8	M22	3	4-11/16	—	3/4	.697	.523	1-11/32
.885	.948		15/16	M24	3	4-29/32	—	3/4	.760	.570	1-11/32
.948	1.010		1	M25	3	5-1/8	—	13/16	.800	.600	1-1/2

* "l3" based on Table 302, column B and shall be no less than minimum USCTI Table 302 thread length. ** "l" based on the length of 12 pitches of the UNC series. Note: 1) "l" is minimum value and has no tolerance. 2) Unless otherwise specified, all tolerances are in accordance with USCTI Table 302. 3) For eccentricity tolerances, see USCTI Table 317.

TECHNICAL INFORMATION

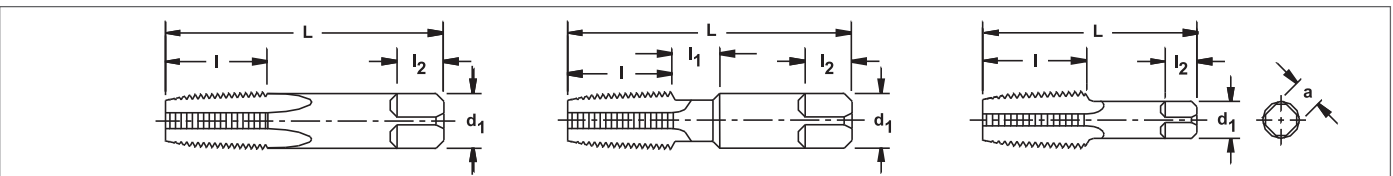


TABLE #6 USCTI TABLE 311 GENERAL DIMENSIONS AND TOLERANCES FOR STRAIGHT AND TAPER PIPE TAPS

Nominal Size (inches)	Dimensions - Inches				
	Length Overall L	Length of Thread l	Length of Square l2	Diameter of Shank d1	Size of Square a
1/16	2-1/8	11/16	3/8	.3125	.234
1/8	2-1/8	3/4	3/8	.3125	.234
1/8	2-1/8	3/4	3/8	.4375	.328
1/4	2-7/16	1-1/16	7/16	.5625	.421
3/8	2-9/16	1-1/16	1/2	.7000	.531
1/2	3-1/8	1-3/8	5/8	.6875	.515
3/4	3-1/4	1-3/8	11/16	.9063	.679
1	3-3/4	1-3/4	13/16	1.1250	.843
1-1/4	4	1-3/4	15/16	1.3125	.984
1-1/2	4-1/4	1-3/4	1	1.5000	1.125
2	4-1/2	1-3/4	1-1/8	1.8750	1.406
2-1/2	5-1/2	2-9/16	1-1/4	2.2500	1.687
3	6	2-5/8	1-3/8	2.6250	1.968
3-1/2	6-1/2	2-11/16	1-1/2	2.8125	2.108
4	6-3/4	2-3/4	1-5/8	3.0000	2.250

Element	Tolerances		Tolerance (inches)
	Range (inches)	Direction	
Length Overall L	1/16 to 3/4 incl.	Plus or Minus	1/32
	1 to 4 incl.	Plus or Minus	1/16
Length of Thread l	1/16 to 3/4 incl.	Plus or Minus	1/16
	1 to 1-1/4 incl.	Plus or Minus	3/32
Length of Square l2	1-1/2 to 4 incl.	Plus or Minus	1/8
	1/16 to 3/4 incl.	Plus or Minus	1/32
Diameter of Shank d1	1 to 4 incl.	Plus or Minus	1/16
	1/16 to 1/8 incl.	Minus	.0015
Size of Square a	1/4 to 1/2 incl.	Minus	.0020
	3/4 to 1 incl.	Minus	.0020
	1-1/4 to 4 incl.	Minus	.0030
Length of Square l2	1/16 to 1/8 incl.	Minus	.0040
	1/8 to 3/4 incl.	Minus	.0060
	1 to 4 incl.	Minus	.0080



TABLE #7 SURFACE TREATMENTS AND COATINGS FOR HIGH-SPEED STEEL GROUND THREAD TAPS

Coating	Properties and Application	Precautions
VERTANIUM® Titanium Nitride (TiN)	Proprietary TiN coating (hardness 2300 Vickers) offers significantly improved wear life and thread finish, often at higher tapping speeds in a broad range of materials, especially ferrous steels. Golden color.	Use with caution in nonferrous materials because of tendency to gall.
VERTANIUM ULTRA® Titanium Carbonitride (TiCN)	Proprietary TiCN coating (hardness 3000 Vickers) is harder, tougher and more wear resistant than TiN under conditions of moderate cutting temperatures. Like TiN, TiCN may be used at higher cutting speeds in a broad range of materials, especially ferrous steels. Blue-gray color.	Use with caution in nonferrous materials because of tendency to gall. TiAlN is a better choice when used at extreme temperatures.
Titanium Aluminum Nitride (TiAlN)	TiAlN coating (2600 Vickers) offers improved wear life and thread finish, especially in conditions where high temperatures can be generated. Violet-gray color.	Use with caution in nonferrous materials because of tendency to gall.
Chromium Nitride (CrN)	CrN is medium hard (1800 Vickers) has lower wear resistance than TiN, TiCN and TiAlN. However unlike these coatings, CrN does not gall when used in some nonferrous work materials. Silver color.	Ineffective in ferrous materials.
Nitride A-10	Hardened case extends wear life in abrasive materials.	Avoid on taper pipe, fast spiral and small diameter (<#6) or fine pitch taps due to tendency for thread chipping.
Oxide X-10	Helps prevent galling in ferrous (iron based) materials. For free machining steel.	Has a tendency to cause galling in nonferrous materials such as aluminum.
Nitride and Oxide X-20	Combines the benefits of nitride and oxide surface treatments.	See precautions for nitride and oxide surface treatments.

TABLE #8 HSS Tap Coating and Surface Treatment Guide

Best: First choice among all commercially available coatings. Should provide superior results in the proper application.

Alternate: Provides a significant performance benefit over uncoated tool. This may include improved life, productivity, size, finish or any combination.

Possible: Performance often application dependent. Results are difficult to predict and may be variable.

Not Recommended: Not compatible with the selected material. Likely to perform worse than an uncoated tool and the benefit may not be cost justifiable.

Speed : A generalized safe starting point compared to speeds currently recommended for uncoated taps.

NOTE: Chart applies to un-heat treated materials, generally hardness levels less than 275 BHN or 28 HRC.

Material Class	Material Type	Examples	Speed compared to uncoated >							
			TiN +50% speed	TiCN +50% speed	TiN+CrCC +50% speed	TiAlN +100% speed	CrN Same speed	Nitride A-10	Oxide X-10	Nitride, Oxide X-20
Steel	Carbon steels	1010, 1045	ALT	BEST	ALT	NR	NR	NR	POSS	POSS
	Alloy steels	4140, 8620	ALT	BEST	ALT	POSS	NR	NR	POSS	POSS
	Tool steels	A2, D2, H13	ALT	BEST	ALT	ALT	NR	NR	POSS	POSS
	Martensitic stainless	414, 440	ALT	BEST	ALT	ALT	NR	NR	POSS	POSS
	PH stainless	15-5PH, 17-4PH	ALT	ALT	ALT	BEST	NR	NR	POSS	POSS
Stainless	Austenitic stainless	304, 316	ALT	ALT	BEST	ALT	NR	NR	POSS	POSS
	Cast irons, ductile	Class 20 -50	ALT	BEST	ALT	ALT	NR	POSS	POSS	POSS
Cast irons, gray	ALT		BEST	ALT	ALT	NR	POSS	POSS	POSS	
Non-ferrous	Aluminum, wrought	1100, 2024	NR	NR	BEST	NR	ALT	ALT	NR	NR
	Alum. silicon, cast	319, 360, 380	POSS	ALT	BEST	NR	POSS	ALT	NR	NR
	Copper & alloys		NR	NR	POSS	NR	ALT	ALT	NR	NR
	Brass		NR	NR	POSS	NR	ALT	ALT	NR	NR
	Bronze		NR	NR	POSS	NR	ALT	ALT	NR	NR
	Zinc		NR	NR	POSS	NR	ALT	ALT	NR	NR
High-temp	Magnesium & alloys		NR	NR	POSS	NR	ALT	ALT	NR	NR
	Titaniums, pure	CP Ti	NR	NR	BEST	NR	POSS	ALT	NR	NR
	Titanium, alloys	Ti-6Al-4V	POSS	POSS	BEST	POSS	POSS	ALT	NR	NR
	Nickel based alloys	Monel, Inconel	ALT	ALT	ALT	BEST	ALT	POSS	POSS	POSS
	Iron based alloys	A-286, Incoloy	ALT	ALT	ALT	BEST	NR	POSS	POSS	POSS
Other	Cobalt based alloys	Haynes	ALT	ALT	ALT	BEST	NR	POSS	POSS	POSS
	Plastics, soft		BEST	ALT	POSS	NR	POSS	ALT	NR	NR
Graphite	Plastics, abrasive		ALT	BEST	POSS	NR	POSS	ALT	NR	NR
	Graphite		ALT	BEST	POSS	NR	POSS	ALT	NR	NR



CNC FORMING TAPS

Ground Thread / High Speed Steel

When engineering a new job with the Forming Tap, it is recommended that the drill size for 65% of thread be used as shown on Table #10 and #11. In most cases, the tap limit shown on Table #9 will produce the class of fit indicated. If it does not, use a lower or higher H number than indicated or contact the factory.

The formula on which Table #10 and #11 is based, is derived from extensive statistical data and laboratory testing on a wide variety of ductile metals, and can be expressed as follows:

Hole Size =

Basic tap major diameter - $\frac{.0068 \times \text{amount of \% of thread}}{\text{threads per inch.}}$

Example: Correct hole size for 65% of thread with a 1/4-20 CNC Forming Tap

Basic tap O.D. = .2500

Hole Size = $.2500 - \frac{.0068 \times 65}{20} = \frac{.442}{20}$

= $.2500 - \frac{.442}{20}$

= $.2500 - .0220$

= .2280 or #1 drill

If results are not satisfactory or if assistance is needed in determining correct hole sizes, contact your area Vermont sales representative or the Technical Services Department at Vermont Tap and Die.

The Vermont CNC Forming Tap is a new design expanding the use of forming taps further into harder and less ductile materials which up to now have not been successfully tapped with other existing types of forming taps.

The design of the CNC Forming Tap makes it less sensitive to undesirable hole conditions such as size variation, out-of-roundness, and excessive taper that often cause other forming taps to fail or break. However, in the case of holes that are small, or excessively tapered, the CNC Forming Tap may generate some fine chips.

The same recommendations, such as hole size, coolant, and spindle speed, that are made for other forming taps also apply to corresponding CNC Forming Taps.

CNC Forming Taps are available, as standard, in sizes, thread pitches, and pitch diameter limits shown on pages 31 and 32.

Bottom style CNC Forming Taps have approximately 2 threads tapered. Plug style CNC Forming Taps have approximately 4 threads tapered.

Other diameter, thread pitches, and left hand threads, may be available as special.

If further assistance is needed when engineering a new job with the CNC Forming Tap, contact your area Vermont sales representative, or the Technical Services Department at Vermont Tap and Die.

**TABLE #9
CNC FORMING TAP RECOMMENDATIONS FOR NOMINAL CLASS OF FIT**

TAP SIZE	PITCH	BASIC PITCH DIA.	H LIMIT / RECOMMENDED TAP TOLERANCE FOR		
			CLASS 2 FIT	CLASS 2B FIT	CLASS 3B FIT
2	56	.0744	-	-	-
2	64	.0759	-	-	-
3	48	.0855	-	-	-
3	56	.0874	-	-	-
4	40	.0958	H3	H5	H3
4	48	.0985	H3	H5	H3
5	40	.1088	H3	H5	H3
5	44	.1102	H3	H5	H3
6	32	.1117	H3	H5	H3
6	40	.1218	H3	H5	H3
8	32	.1437	H3	H5	H3
8	36	.1460	H3	H5	H3
10	24	.1629	H4	H6	H4
10	32	.1697	H4	H6	H4
12	24	.1889	H4	H6	H4
12	28	.1928	H4	H6	H4
1/4	20	.2175	H4	H6	H4
1/4	28	.2268	H4	H6	H4
5/16	18	.2764	H5	H7	H5
5/16	24	.2854	H5	H7	H5
3/8	16	.3344	H5	H7	H5
3/8	24	.3479	H5	H7	H5
7/16	14	.3911	H5	H8	H5
7/16	20	.4050	H5	H8	H5
1/2	13	.4500	H5	H8	H5
1/2	20	.4675	H5	H8	H5
9/16	12	.5084	H7	H10	H7
9/16	18	.5264	H7	H10	H7



CNC FORMING TAPS

Ground Thread / High Speed Steel

TABLE #10

TAP DRILL SIZES FOR FORMING TAPS

THEORETICAL HOLE SIZE = (BASIC TAP O.D.) - .0068 X % OF THREAD
(core, punch, or drill size) THREADS PER INCH

TAP SIZE	PITCH	75% THREAD		70% THREAD		65% THREAD		60% THREAD	
		THEORETICAL HOLE SIZE	NEAREST DRILL SIZE	THEORETICAL HOLE SIZE	NEAREST DRILL SIZE	THEORETICAL HOLE SIZE	NEAREST DRILL SIZE	THEORETICAL HOLE SIZE	NEAREST DRILL SIZE
2	56	.0769	1.95 mm	.0774	1.95 mm	.0781	5/64	.0787	#47
2	64	.0780	5/64	.0785	#47	.0791	2.0 mm	.0796	2.0 mm
3	48	.0884	2.25 mm	.0890	#43	.0898	#43	.0905	2.3 mm
3	56	.0899	#43	.0904		.0911	2.3 mm	.0917	2.3 mm
4	40	.0993	2.5 mm	.1000	#39	.1010	#39	.1018	#38
4	48	.1014	#38	.1020	#38	.1028	2.6 mm	.1035	2.6 mm
5	40	.1123	#34	.1130	#33	.1140	#33	.1148	2.9 mm
5	44	.1134	#33	.1141	2.9 mm	.1150	2.9 mm	.1157	
6	32	.1221	3.1 mm	.1230	3.1 mm	.1242		.1252	1/8
6	40	.1253	1/8	.1260	3.2 mm	.1270	3.2 mm	.1278	3.25 mm
8	32	.1481	3.75 mm	.1490		.1502	#25	.1512	3.8 mm
8	36	.1498	#25	.1507	3.8 mm	.1517	#24	.1526	#24
10	24	.1688		.1700	#18	.1716	11/64	.1729	11/64
10	32	.1741	#17	.1750	=	.1762		.1772	#16
12	24	.1948	#10	.1960	#9	.1976	5.0 mm	.1989	#8
12	28	.1978	5.0 mm	.1989	#8	.2002	#8	.2014	#7
1/4	20	.2245	5.7 mm	.2260		.2279	#1	.2295	#1
1/4	28	.2318		.2329	5.9 mm	.2342	A	.2354	15/64
5/16	18	.2842	7.2 mm	.2861	7.25 mm	.2879	7.3 mm	.2898	L
5/16	24	.2912	7.4 mm	.2927		.2941	M	.2955	7.5 mm
3/8	16	.3431	11/32	.3452	8.75 mm	.3474	S	.3495	8.9 mm
3/8	24	.3537	9.0 mm	.3552	9.0 mm	.3566		.3580	T
7/16	14	.4011		.4035	Y	.4059	13/32	.4084	
7/16	20	.4120	Z	.4137	10.5 mm	.4154		.4171	
1/2	13	.4608		.4634		.4660		.4686	15/32
1/2	20	.4745	12.0 mm	.4762		.4779		.4796	
9/16	12	.5200		.5229		.5257		.5285	17/32
9/16	18	.5342	13.5 mm	.5361		.5380		.5398	

TABLE #11

METRIC TAP / DRILL SIZES FOR FORMING TAPS

THEORETICAL HOLE SIZE = (BASIC TAP O.D.) - .0068 X % OF THREAD
(core, punch, or drill size) THREADS PER INCH

TAP SIZE	PITCH	75% THREAD		70% THREAD		65% THREAD		60% THREAD	
		THEORETICAL HOLE SIZE	NEAREST DRILL SIZE	THEORETICAL HOLE SIZE	NEAREST DRILL SIZE	THEORETICAL HOLE SIZE	NEAREST DRILL SIZE	THEORETICAL HOLE SIZE	NEAREST DRILL SIZE
M3	0.5	.1081	2.75 mm	.1087	2.75 mm	.1094	7/64	.1101	2.8 mm
M3	0.6	.1061	2.7 mm	.1069	2.7 mm	.1077	2.75 mm	.1085	2.75 mm
M3.5	0.6	.1258	3.2 mm	.1265	3.2 mm	.1274	3.2 mm	.1281	#30
M4	0.7	.1434	#27	.1444	#27	.1453	3.7 mm	.1462	3.7 mm
M4	0.8	.1414	3.6 mm	.1425	3.6 mm	.1435	#27	.1447	#27
M4.5	0.75	.1621	4.1 mm	.1631	4.1 mm	.1661	#19	.1651	4.2 mm
M5	0.8	.1808	4.6 mm	.1819	4.6 mm	.1829	#14	.1840	4.7 mm
M5	0.9	.1788	#15	.1800	#15	.1812	4.6 mm	.1824	#14
M6	1	.2161	5.5 mm	.2175	5.5 mm	.2188	7/32	.2202	5.6 mm
M6.3	1	.2280	5.8 mm	.2293	5.8 mm	.2306	5.8 mm	.2320	5.9 mm
M7	1	.2555	6.5 mm	.2569	6.5 mm	.2582	F	.2595	6.6 mm
M8	1	.2949	7.5 mm	.2962	7.5 mm	.2976	19/64	.2989	7.6 mm
M8	1.25	.2899	7.4 mm	.2915	7.4 mm	.2932	7.4 mm	.2949	7.5 mm
M10	1.25	.3686	9.4 mm	.3702	9.4 mm	.3720	9.4 mm	.3726	9.5 mm
M10	1.5	.3636	9.2 mm	.3656	9.3 mm	.3676	9.3 mm	.3696	9.4 mm
M12	1.25	.4474	11.4 mm	.4490	11.4 mm	.4507	11.4 mm	.4524	11.5 mm
M12	1.75	.4373	11.1 mm	.4397	7/16	.4420	11.2 mm	.4443	11.3 mm
M14	1.25	.5261	13.4 mm	.5278	13.4 mm	.5295	13.4 mm	.5311	13.5 mm
M14	1.5	.5211	13.2 mm	.5231	13.3 mm	.5251	13.3 mm	.5271	13.4 mm
M14	2	.5110	13.0 mm	.5137	13.0 mm	.5164	13.1 mm	.5191	13.2 mm



ISO METRIC THREADS

The ISO (International Standards Organization) metric screw thread system is the international standard.

Standards for taps and dies for ISO metric threads have been established by the United States Cutting Tool Institute. Those standards cover general dimensions of tap overall length, thread length, shank diameter, square size, and the thread major diameter and pitch diameter needed to produce the required thread assembly fit.

All standards established by USCTI are to best suit tapping operations in the U.S. The shank and square dimensions of the closest American Standard tap are used so that existing tapping equipment can be used. For example, M8 x 1.25 tap with basic major diameter of .3150 would be made to 5/16 tap general dimensions. Those taps would be used essentially the same as 5/16 taps, with the only difference being in the thread lead.

If a lead screw or other lead mechanism must be used, it must be changed to the metric thread pitch.

There are three classes of fit in the ISO system for internal threads or nuts: close fit - Class 5H; medium fit - Class 6H; and free fit - Class 7H.

The most commonly used and generally recommended class of fit is 6H which is closely equivalent to the Unified System class 2-B fit.

Metric tap pitch diameter, for U.S. operation, is indicated in 'D' limit which is essentially the same as the 'H' limit in American Standard taps.

Conversion to the metric thread system is not complicated. However, when in doubt about class of fit or tap pitch diameter requirements, indicate the pitch diameter shown on the thread gage or on the work piece point when ordering taps, or contact Vermont Tap & Die Technical Services Department.

TABLE #12 METRIC SCREW THREADS

NOMINAL SIZE AND PITCH	INTERNAL THREAD – CLASS 6H (Nut or Workpiece)						TAP THREAD DIMENSIONS				
	MILLIMETERS			INCHES			D LIMIT	MILLIMETERS		INCHES	
	PITCH DIAMETER MIN	PITCH DIAMETER MAX	MIN. MAJOR DIA.	PITCH DIAMETER MIN	PITCH DIAMETER MAX	MIN. MAJOR DIA.		PITCH DIAMETER MIN	PITCH DIAMETER MAX	PITCH DIAMETER MIN	PITCH DIAMETER MAX
M1.6 x 0.35	1.373	1.458	1.600	.0541	.0574	.0630	D3	1.397	1.412	.0550	.0556
M1.8 x 0.35	1.573	1.658	1.800	.0620	.0653	.0709	D3	1.598	1.613	.0629	.0635
M2 x 0.4	1.740	1.830	2.000	.0685	.0720	.0787	D3	1.763	1.778	.0694	.0700
M2 x 0.45	1.707	1.802	2.000	.0672	.0709	.0787	D3	1.730	1.745	.0681	.0687
M2.2 x 0.45	1.908	2.003	2.200	.0751	.0789	.0866	D3	1.930	1.945	.0760	.0766
M2.5 x 0.45	2.208	2.303	2.500	.0869	.0907	.0984	D3	2.230	2.245	.0878	.0884
M3 x 0.6	2.610	2.722	3.000	.1028	.1072	.1181	D4	2.642	2.662	.1040	.1048
M3 x 0.5	2.675	2.775	3.000	.1053	.1093	.1181	D3	2.697	2.712	.1062	.1068
M3.5 x 0.6	3.110	3.222	3.500	.1225	.1268	.1378	D4	3.142	3.162	.1237	.1245
M4 x 0.8	3.481	3.606	4.000	.1370	.1420	.1575	D4	3.510	3.530	.1382	.1390
M4 x 0.7	3.545	3.663	4.000	.1396	.1442	.1575	D4	3.576	3.596	.1408	.1416
M4.5 x 0.75	4.013	4.131	4.500	.1580	.1626	.1772	D4	4.044	4.064	.1592	.1600
M5 x 0.9	4.417	4.551	5.000	.1739	.1792	.1969	D4	4.448	4.468	.1751	.1759
M5 x 0.8	4.480	4.605	5.000	.1764	.1813	.1969	D4	4.511	4.531	.1776	.1784
M6 x 1	5.350	5.500	6.000	.2106	.2165	.2362	D5	5.387	5.412	.2121	.2131
M6.3 x 1	5.650	5.800	6.300	.2224	.2283	.2480	D5	5.687	5.712	.2239	.2249
M7 x 1	6.350	6.500	7.000	.2500	.2559	.2756	D5	6.388	6.413	.2515	.2525
M8 x 1.25	7.188	7.348	8.000	.2830	.2893	.3150	D5	7.221	7.251	.2843	.2855
M8 x 1	7.350	7.500	8.000	.2894	.2953	.3150	D5	7.389	7.414	.2909	.2919
M10 x 1.5	9.026	9.206	10.000	.3553	.3624	.3937	D6	9.070	9.100	.3571	.3583
M10 x 1.25	9.188	9.348	10.000	.3617	.3680	.3937	D5	9.220	9.250	.3630	.3642
M12 x 1.75	10.863	11.063	12.000	.4277	.4356	.4724	D6	10.909	10.939	.4295	.4307
M12 x 1.25	11.188	11.368	12.000	.4405	.4476	.4724	D5	11.222	11.252	.4418	.4430
M14 x 2	12.701	12.913	14.000	.5000	.5084	.5512	D7	12.748	12.789	.5019	.5035
M14 x 1.5	13.026	13.216	14.000	.5128	.5203	.5512	D6	13.071	13.101	.5146	.5158
M14 x 1.25	13.188	13.368	14.000	.5192	.5263	.5512	D5	13.221	13.251	.5205	.5217
M16 x 2	14.701	14.913	16.000	.5788	.5871	.6299	D7	14.750	14.790	.5807	.5823
M16 x 1.5	15.026	15.216	16.000	.5916	.5990	.6299	D6	15.072	15.102	.5934	.5946
M18 x 2.5	16.376	16.600	18.000	.6447	.6535	.7087	D7	16.424	16.464	.6466	.6482
M18 x 1.5	17.026	17.216	18.000	.6703	.6778	.7087	D6	17.071	17.101	.6721	.6733
M20 x 2.5	18.376	18.600	20.000	.7235	.7323	.7874	D7	18.425	18.466	.7254	.7270
M20 x 1.5	19.026	19.216	20.000	.7490	.7565	.7874	D6	19.070	19.100	.7508	.7520
M22 x 2.5	20.376	20.600	22.000	.8022	.8110	.8661	D7	20.424	20.465	.8041	.8057
M22 x 1.5	21.026	21.216	22.000	.8278	.8353	.8661	D6	21.072	21.102	.8296	.8308
M24 x 3	22.051	22.316	24.000	.8682	.8786	.9449	D8	22.113	22.154	.8706	.8722
M24 x 2	22.701	22.925	24.000	.8937	.9026	.9449	D7	22.748	22.789	.8956	.8972
M27 x 3	25.051	25.316	27.000	.9863	.9967	1.0630	D8	25.103	25.154	.9883	.9903
M27 x 2	25.701	25.925	27.000	1.0118	1.0207	1.0630	D7	25.748	25.789	1.0137	1.0153
M30 x 3.5	27.727	28.007	30.000	1.0916	1.1026	1.1811	D9	27.790	27.841	1.0941	1.0961
M30 x 2	28.701	28.925	30.000	1.1300	1.1388	1.1811	D7	28.750	28.791	1.1319	1.1335
M33 x 3.5	30.727	31.007	33.000	1.2097	1.2207	1.2992	D9	30.790	30.841	1.2122	1.2142
M33 x 2	31.701	31.925	33.000	1.2481	1.2569	1.2992	D7	31.750	31.791	1.2500	1.2516
M36 x 4	33.402	33.702	36.000	1.3150	1.3268	1.4173	D9	33.464	33.515	1.3175	1.3195
M36 x 3	34.051	34.316	36.000	1.3406	1.3510	1.4173	D8	34.102	34.153	1.3426	1.3446



TECHNICAL INFORMATION

TABLE #13 SUGGESTED SPEEDS FOR HIGH SPEED STEEL AND VERTANIUM TAPS

WORK MATERIAL	SPEED-FEET-PER-MINUTE	
	UNCOATED	VERTANIUM
Alloy Steels	125-225 BHN	30-60 60-120
	225-325 Bhn	20-45 40-90
	325-425 Bhn	10-35 20-70
Aluminum Alloys		75-150 *150-300
Carbon Steels	Low Carbon (.10-.25C)	50-75 100-150
225 Bhn or less	Med Carbon (.30-.55C)	40-65 80-130
	High Carbon (.60-.95C)	30-55 60-110
Cast Iron	Ductile, Annealed	40-60 80-120
	Ductile, As Cast	20-45 40-90
	Gray (Class 20, 25)	40-80 80-160
	Gray (Class 30-50)	25-50 50-100
	Malleable 200 Bhn or less	30-60 60-120
Copper Alloys		40-100 *80-200
Graphites & Carbons		5-10 10-20

WORK MATERIAL	SPEED-FEET-PER-MINUTE	
	UNCOATED	VERTANIUM
High Temperature Alloys	Cobalt Base (Haynes Alloys)	3-8 5-16
	Iron Base (Incoloy, A-286)	7-15 15-30
	Nickel Base (Hastelloy, Inconel)	4-10 8-20
Magnesium		100-150 *150-200
Plastics		25-50 50-100
Stainless Steels		15-35 30-70
Titanium	Pure	25-55 *50-110
	Alloys (Ti-6Al-4V)	10-25 *20-50
Tool Steels	200-275 Bhn	15-30 30-60
	300-350 Bhn	10-25 20-50
	40-50 Rc	5-15 10-30
Zinc Alloys		100-150 *150-250

* Success of VERTANIUM® taps in nonferrous materials depends on the machining conditions used.

TABLE #14 SPEEDS FOR TAPS CONVERSION CHART - fpm to rpm

Tap Sizes	Taper Pipe Taps	Surface Feet per Minute																	
		5'	10'	15'	20'	25'	30'	40'	50'	60'	70'	80'	90'	100'	110'	120'	130'	140'	150'
		Revolutions per Minute																	
0		318	637	955	1273	1592	1910	2546	3183	3820	4456	5093	5729	6366	7003	7639	8276	8913	9549
1		273	546	819	1046	1308	1570	2093	2617	3140	3663	4186	4710	5233	5756	6279	6805	7326	7849
2		212	424	637	888	1110	1333	1777	2221	2665	3109	3554	3999	4442	4886	5330	5774	6218	6662
3		191	382	573	772	964	1157	1543	1929	2315	2701	3086	3472	3858	4244	4629	5015	5401	5787
4		174	347	521	682	853	1023	1364	1705	2046	2387	2728	3069	3411	3751	4092	4434	4775	5116
5		147	294	441	611	764	917	1222	1528	1833	2139	2445	2750	3056	3361	3667	3973	4278	4584
6		136	273	409	553	691	829	1106	1382	1659	1935	2212	2488	2766	3042	3318	3595	3871	4148
8		119	239	358	466	583	699	932	1165	1398	1631	1864	2097	2330	2563	2796	3029	3262	3495
10		101	201	302	402	502	603	804	1005	1205	1406	1607	1808	2009	2210	2411	2612	2813	3014
12		87	174	260	354	442	531	707	884	1061	1238	1415	1592	1769	1945	2122	2300	2476	2653
1/4		76	153	229	306	382	458	611	764	917	1070	1222	1375	1528	1681	1833	1986	2139	2292
5/16		62	123	185	245	306	367	489	611	733	856	978	1100	1222	1345	1467	1589	1711	1833
3/8		50	101	151	204	255	305	407	509	611	713	815	917	1019	1120	1222	1324	1426	1528
7/16	1/8	43	87	130	175	219	262	349	437	524	611	698	786	873	960	1048	1135	1222	1310
1/2	-	38	76	115	153	191	229	305	382	458	535	611	688	764	840	917	993	1070	1146
9/16	1/4	34	68	102	137	172	206	274	342	410	478	547	616	683	752	820	888	952	1020
5/8	-	32	64	96	122	153	183	244	306	367	428	489	550	611	672	733	794	856	917
11/16	3/8	28	55	83	111	138	167	222	278	333	389	444	500	556	611	667	722	778	833
3/4	-	25	51	76	102	128	153	203	255	305	357	407	458	509	560	611	662	713	764
7/8	1/2	22	43	65	87	109	131	175	218	262	306	350	392	437	480	524	568	611	655
1	-	19	38	57	76	96	115	153	191	230	268	305	344	382	420	458	497	535	573
1-1/8	3/4	17	34	51	68	84	102	136	170	204	238	272	306	340	373	407	441	475	509
1-1/4	-	15	31	46	61	76	92	122	153	183	214	244	275	305	336	367	397	428	458
1-3/8	1	14	28	42	56	69	83	111	139	167	194	222	250	278	306	333	361	389	417
1-1/2	-	13	25	38	51	63	76	102	127	153	178	204	229	255	280	305	331	356	382
1-5/8	-	12	23	35	47	59	71	94	118	141	165	188	212	235	259	282	306	329	353
1-3/4	-	11	22	33	44	55	65	87	109	131	153	175	196	218	240	262	284	306	327
1-7/8	-	10	20	30	41	51	61	81	102	122	143	163	183	204	224	244	265	285	306
2		9	19	29	38	48	57	76	96	115	134	153	172	191	210	229	248	267	287
M1		490	979	1469	1959	2449	2938	3918	4897	5877	6856	7836	8815	9795	10774	11754	12733	13713	14692
M2		242	484	725	967	1209	1451	1934	2418	2901	3385	3868	4352	4835	5319	5803	6286	6770	7253
M3		162	324	486	647	829	971	1295	1619	1942	2266	2590	2914	3237	3561	3885	4208	4532	4856
M3.5		138	277	415	557	692	830	1107	1384	1661	1938	2214	2491	2768	3045	3322	3599	3875	4152
M4		122	243	365	487	608	730	973	1217	1460	1698	1946	2190	2433	2676	2920	3163	3406	3650
M5		97	194	291	388	485	582	776	970	1163	1357	1551	1745	1939	2133	2327	2521	2715	2909
M6		81	162	243	324	405	486	647	809	971	1133	1295	1457	1619	1781	1942	2104	2266	2428
M7		69	138	208	277	346	415	554	692	830	969	1107	1246	1384	1522	1661	1799	1938	2076
M8		61	121	182	243	303	364	485	606	728	849	970	1091	1213	1334	1455	1577	1698	1819
M10		48	97	145	194	242	291	388	485	582	679	776	873	970	1067	1163	1260	1357	1454
M12		40	81	121	162	202	243	324	405	486	567	647	728	809	890	971	1052	1133	1214
M14		35	69	104	139	173	208	277	347	416	485	555	624	693	763	832	901	971	1040
M16		30	61	91	121	152	182	243	303	364	424	485	546	606	667	728	788	849	910
M18		27	54	81	108	135	162	216	269	323	377	431	485	539	593	647	700	754	808
M20		24	49	73	97	121	146	194	243	291	340	388	437	485	534	582	631	680	728
M22		22	44	66	88	110	132	176	221	265	309	353	397	441	485	529	573	618	662
M24		20	40	61	81	101	121	162	202	243	283	323	364	404	445	485	526	566	606
M27		18	36	54	72	90	108	144	180	216	252	287	323	359	395	431	467	503	539
M30		16	32	49	65	81	97	129	162	194	226	259	291	323	356	388	420	453	485

TECHNICAL INFORMATION



VERMONT TAP & DIE

TABLE #15 TAP DRILL SIZES

Probable Percentage of Full Thread Produced In Tapped Hole Using Stock Sizes of Drill

TAP	TAP DRILL	DEC. EQUIV.	THEOR.	PROB.	HOLE SIZE	% OF THREAD	TAP	TAP DRILL	DEC. EQUIV.	THEOR.	PROB.	HOLE SIZE	% OF THREAD
			% OF THREAD	OVERSIZE (MEAN)						% OF THREAD	OVERSIZE (MEAN)		
0-80	56	.0465	83	.0015	.0480	74	1/4-28	3	.2130	80	.0038	.2168	72
	3/64	.0469	81	.0015	.0484	71		7/32	.2188	67	.0038	.2226	59
1-64	54	.0550	89	.0015	.0565	81	5/16-18	2	.2210	63	.0038	.2248	55
	53	.0595	67	.0015	.0610	59		F	.2570	77	.0038	.2608	72
1-72	53	.0595	75	.0015	.0610	67	5/16-24	G	.2610	71	.0041	.2651	66
	1/16	.0625	58	.0015	.0640	50		17/64	.2656	65	.0041	.2697	59
2-56	51	.0670	82	.0017	.0687	74	3/8-16	H	.2660	64	.0041	.2701	59
	50	.0700	69	.0017	.0717	62		H	.2660	86	.0041	.2701	78
	49	.0730	56	.0017	.0747	49		I	.2720	75	.0041	.2761	67
2-64	50	.0700	79	.0017	.0717	70	3/8-24	J	.2770	66	.0041	.2811	58
	49	.0730	64	.0017	.0747	56		5/16	.3125	77	.0044	.3169	72
3-48	48	.0760	85	.0017	.0779	78	7/16-14	O	.3160	73	.0044	.3204	68
	5/64	.0781	77	.0019	.0800	70		P	.3230	64	.0044	.3274	59
3-56	47	.0785	76	.0019	.0804	69	9/16-12	21/64	.3281	87	.0044	.3325	79
	46	.0810	67	.0019	.0829	60		Q	.3320	79	.0044	.3364	71
	45	.0820	63	.0019	.0839	56		R	.3390	67	.0044	.3434	58
4-40	46	.0810	78	.0019	.0829	69	7/16-20	T	.3580	86	.0046	.3626	81
	45	.0820	73	.0019	.0839	65		23/64	.3594	84	.0046	.3640	79
	44	.0860	56	.0019	.0879	48		U	.3680	75	.0046	.3726	70
4-48	44	.0860	80	.0020	.0880	74	1/2-13	3/8	.3750	67	.0046	.3796	62
	43	.0890	71	.0020	.0910	65		V	.3770	65	.0046	.3816	60
	42	.0935	57	.0020	.0955	51		W	.3860	79	.0046	.3906	72
5-40	3/32	.0938	56	.0020	.0958	50	9/16-18	25/64	.3906	72	.0046	.3952	65
	42	.0935	68	.0020	.0955	61		X	.3970	62	.0046	.4016	55
	41	.0960	59	.0020	.0980	52		27/64	.4219	78	.0047	.4266	73
5-44	40	.0980	83	.0023	.1003	76	1/2-20	7/16	.4375	63	.0047	.4422	58
	39	.0995	79	.0023	.1018	71		29/64	.4531	72	.0047	.4578	65
	38	.1015	72	.0023	.1038	65		15/32	.4688	87	.0048	.4736	82
6-32	37	.1040	65	.0023	.1063	58	1/2-28	31/64	.4844	72	.0048	.4892	68
	38	.1015	79	.0023	.1038	72		1/2	.5000	87	.0048	.5048	80
	37	.1040	71	.0023	.1063	63		33/64	.5156	65	.0048	.5204	58
6-40	36	.1065	63	.0023	.1088	55	5/8-11	17/32	.5313	79	.0049	.5362	75
	37	.1040	84	.0023	.1063	78		35/64	.5469	66	.0049	.5518	62
	36	.1065	78	.0026	.1091	71		9/16	.5625	87	.0049	.5674	80
8-32	7/64	.1094	70	.0026	.1120	64	5/8-18	37/64	.5781	65	.0049	.5831	58
	35	.1100	69	.0026	.1126	63		41/64	.6406	84	.0050	.6456	80
	34	.1110	67	.0026	.1136	60		21/32	.6563	72	.0050	.6613	68
8-40	33	.1130	62	.0026	.1156	55	3/4-10	11/16	.6875	77	.0050	.6925	71
	34	.1110	83	.0026	.1136	75		49/64	.7656	76	.0052	.7708	72
	33	.1130	77	.0026	.1156	69		25/32	.7812	65	.0052	.7864	61
8-36	32	.1160	68	.0026	.1186	60	7/8-14	51/64	.7969	84	.0052	.8021	79
	29	.1360	69	.0029	.1389	62		13/16	.8125	67	.0052	.8177	62
	28	.1405	58	.0029	.1434	51		1"-8	55/64	.8594	87	.0059	.8653
10-24	29	.1360	78	.0029	.1389	70	1"-12	7/8	.8750	77	.0059	.8809	73
	28	.1405	68	.0029	.1434	57		57/64	.8906	67	.0059	.8965	64
	9/64	.1406	68	.0029	.1435	57		29/32	.9063	58	.0059	.9122	54
10-32	27	.1440	85	.0032	.1472	79	1"-14	59/64	.9219	72	.0060	.9279	67
	26	.1170	79	.0032	.1502	74		15/16	.9375	58	.0060	.9435	52
	25	.1495	75	.0032	.1527	69		15/16	.9375	67	.0060	.9435	61
12-24	24	.1520	70	.0032	.1552	64	1-1/8-7	31/32	.9688	84	.0062	.9750	81
	23	.1540	67	.0032	.1572	61		63/64	.9844	76	.0067	.9911	72
	5/32	.1563	62	.0032	.1595	56		1	1.0000	67	.0070	1.0070	64
12-28	22	.1570	61	.0032	.1602	55	1-1/8-12	1-1/64	1.0156	59	.0070	1.0226	55
	5/32	.1563	83	.0032	.1595	75		1-1/32	1.0313	87	.0071	1.0384	80
	22	.1570	81	.0032	.1602	73		1-3/64	1.0469	72	.0072	1.0541	66
1/4-20	21	.1590	76	.0032	.1622	68	1-1/4-7	1-3/32	1.0938	84			
	20	.1610	71	.0032	.1642	64		1-7/64	1.1094	76			
	19	.1660	59	.0032	.1692	51		1-1/8	1.1250	67			
1/4-28	11/64	.1719	82	.0035	.1754	75	1-1/4-12	1-5/32	1.1563	87			
	17	.1730	79	.0035	.1765	73		1-11/64	1.1719	72			
	16	.1770	72	.0035	.1805	66		1-3/8-6	1-3/16	1.1875	87		
1/4-32	15	.1800	67	.0035	.1835	60	1-1/2-6	1-13/64	1.2031	79			
	14	.1820	63	.0035	.1855	56		1-7/32	1.2188	72			
	16	.1770	84	.0035	.1805	77		1-15/64	1.2344	65			
1/4-40	15	.1800	78	.0035	.1835	70	1-3/8-12	1-9/32	1.2813	87			
	14	.1820	73	.0035	.1855	66		1-19/64	1.2969	72			
	13	.1850	67	.0035	.1885	59		1-5/16	1.3125	87			
1/4-48	3/16	.1875	61	.0035	.1910	54	1-1/2-12	1-21/64	1.3281	79			
	9	.1960	83	.0038	.1998	77		1-11/32	1.3438	72			
	8	.1990	79	.0038	.2028	73		1-23/64	1.3594	65			
1/4-56	7	.2010	75	.0038	.2048	70	1-1/2-16	1-13/32	1.4063	87			
	13/64	.2031	72	.0038	.2069	66		1-27/64	1.4219	72			
	6	.2040	71	.0038	.2078	65							
1/4-64	5	.2055	69	.0038	.2093	63							
	4	.2090	63	.0038	.2128	57							

TECHNICAL INFORMATION

REAMING RECOMMENDED



TABLE #16 METRIC TAP DRILL SIZES

Probable Percentage of Full Thread Produced In Tapped Hole Using Stock Sizes of Drill

Metric Tap Size (mm)	Tap Drill (mm or in.)	Decimal Equiv. Tap Drill (in.)	Theoretical % of Thread	Probable Mean Oversize (in.)	Probable Hole Size (in.)	Probable % of Thread	Metric Tap Size (mm)	Tap Drill (mm or in.)	Decimal Equiv. Tap Drill (in.)	Theoretical % of Thread	Probable Mean Oversize (in.)	Probable Hole Size (in.)	Probable % of Thread							
M1.6 x 0.35	1.20mm	.0472	88	.0014	.0486	80	M7 x 1	A	.2340	81	.0038	.2378	74							
	1.25mm	.0492	77	.0014	.0506	69		6.0mm	.2362	77	.0038	.2400	70							
M2 x 0.4	1/16	.0625	79	.0015	.0640	72	B	.2380	74	.0038	.2418	66	M8 x 1.25	6.7mm	.2638	80	.0041	.2679	74	
	1.60mm	.0630	77	.0017	.0647	69	17/64	.2656	77	.0041	.2697	71		6.8mm	.2660	77	.0041	.2701	70	
M2.5 x 0.45	52	.0635	74	.0017	.0652	66	H	.2660	77	.0041	.2701	70	M10 x 1.5	6.8mm	.2677	74	.0041	.2718	68	
	2.05mm	.0807	77	.0019	.0826	69	8.4mm	.3307	82	.0044	.3351	76		Q	.3320	80	.0044	.3364	75	
	46	.0810	76	.0019	.0829	67	8.5mm	.3346	77	.0044	.3390	71		M12 x 1.75	10.2mm	.4016	79	.0047	.4063	75
45	.0820	71	.0019	.0839	63	Y	.4040	76	.0047	.4087	71	13/32	.4062		74	.0047	.4109	69		
M3 x 0.5	40	.0980	79	.0023	.1003	70	M14 x 2	15/32	.4688	81	.0048	.4736	76	M16 x 2	35/64	.5469	81	.0049	.5518	76
	2.5mm	.0984	77	.0023	.1007	68		12mm	.4724	77	.0048	.4772	72		14mm	.5512	77	.0049	.5561	72
M3.5 x 0.6	39	.0995	73	.0023	.1018	64	M20 x 2.5	11/16	.6875	78	.0050	.6925	74	M24 x 3	13/16	.8125	86	.0052	.8177	82
	33	.1130	81	.0026	.1156	72		17.5mm	.6890	77	.0052	.6942	73		21mm	.8268	76	.0054	.8322	73
M4 x 0.7	2.9mm	.1142	77	.0026	.1168	68	M30 x 3.5	1-1/32	1.0312	83	.0071	1.0383	80	M36 x 4	1-17/64	1.2656	74	REAMING RECOMMENDED		
	32	.1160	71	.0026	.1186	63		25.5mm	1.0433	77	.0071	1.0504	73		1-3/64	1.0469	75	.0072	1.0541	70
M4.5 x 0.75	3.2mm	.1260	88	.0029	.1289	80	M24 x 3	53/64	.8281	76	.0054	.8335	73	M30 x 3.5	1-1/32	1.0312	83	.0071	1.0383	80
	30	.1285	81	.0029	.1314	73		M20 x 2.5	11/16	.6875	78	.0050	.6925		74	M24 x 3	21mm	.8268	76	.0054
M5 x 0.8	3.3mm	.1299	77	.0029	.1328	69	M24 x 3		17.5mm	.6890	77	.0052	.6942	73	M30 x 3.5		1-3/64	1.0469	75	.0072
	3.7mm	.1457	82	.0032	.1489	74		M36 x 4	1-17/64	1.2656	74	REAMING RECOMMENDED								
M6 x 1	26	.1470	79	.0032	.1502	70	M36 x 4		1-17/64	1.2656	74	REAMING RECOMMENDED								
	25	.1495	72	.0032	.1527	64		M36 x 4	1-17/64	1.2656	74	REAMING RECOMMENDED								
M5 x 0.8	4.2mm	.1654	77	.0032	.1686	69	M36 x 4		1-17/64	1.2656	74	REAMING RECOMMENDED								
	19	.1660	75	.0032	.1692	68		M36 x 4	1-17/64	1.2656	74	REAMING RECOMMENDED								
M6 x 1	10	.1935	84	.0038	.1973	76	M36 x 4		1-17/64	1.2656	74	REAMING RECOMMENDED								
	9	.1960	79	.0038	.1998	71		M36 x 4	1-17/64	1.2656	74	REAMING RECOMMENDED								
M6 x 1	5.0mm	.1969	77	.0038	.2006	70	M36 x 4		1-17/64	1.2656	74	REAMING RECOMMENDED								
	8	.1990	73	.0038	.2028	65		M36 x 4	1-17/64	1.2656	74	REAMING RECOMMENDED								

TABLE #17 TAP DRILL SIZE FORMULAE

$$\text{Major Diameter of Thread} - \frac{.01299 \times \text{Amt. of percentage of full thread}}{\text{Number of threads per inch}} = \text{Drilled Hole Size}$$

Note: Select nearest commercial stock drill.

Percentage of Full Thread for Other Drill Sizes

$$\text{No. of Threads per Inch} \times \left(\frac{\text{Major Diameter of Thread} - \text{Selected Drill Diameter}}{.01299} \right) = \text{Percentage of Full Thread}$$



TABLE #18 WORD AND TERM DEFINITIONS APPLYING TO SCREW THREADS, TAPS AND DIES

ALLOWANCE. An allowance is an intentional difference in correlated dimensions of mating parts. It is the minimum clearance (positive allowance) or maximum interference (negative allowance) between such parts.

ANGLE OF THREAD. The angle included between the flanks of the thread, measured in an axial plane.


AXIS. The longitudinal central line through the screw or tap.

BACK TAPER. A slight axial relief on the thread of the tap which makes the pitch diameter of the thread near the shank somewhat smaller than that at the chamfered end. (See RELIEF)

BASIC. The theoretical or nominal standard size from which all variations are made. (See SIZE)

CHAMFER. The tapering of the end of the thread on a tap by cutting away and relieving the crest of the first few teeth to distribute the cutting action over several teeth. It also acts as a guide in starting the tap. When this tapering amounts to 8 to 10 threads, the tap is called a *taper* tap; when 3 to 5 threads, a *plug* tap; and with 1 to 2 threads chamfer, a *bottoming* tap.

Chamfer Dimensions



CORE DIAMETER. The diameter of an imaginary cylinder tangent to the deepest part of the flute.

CREST. The top surface joining the two flanks of a thread. The crest of an external thread is at its major diameter, while the crest of an internal thread is at its minor diameter.

CREST CLEARANCE. The space between the crest of a thread and the root of its component.

CUTTING EDGE. The leading side of the land in the direction of rotation for cutting and which does the actual cutting.

DEPTH OF THREAD. The distance between the crest and the base of the thread, measured normal to the axis.

DRYSEAL. A fuel connection for both external and internal application designed for use where the assembled product must withstand high fluid or gas pressures without the use of a sealing compound or where a sealer is functionally objectionable.

FLANK. The surface of the thread, sometimes referred to as side of thread, which connects the crest with the root.

FLUTES. The longitudinal channels formed in a tap to create cutting edges on the thread profile and to provide chip spaces and cutting-fluid passages.

FLUTE LEAD. The axial advance of a helical or spiral cutting edge in one turn around the tool axis.

HEEL. The face of the tap land trailing the cutting edge during forward rotation.

HEIGHT OF THREAD. The distance between the crest and the base of thread measured normal to the axis.


HELIX ANGLE—FLUTE. Flutes of taps are sometimes cut helically instead of straight. This helix angle is the angle made by the flute with the axis of the tap. (Helical flutes are sometimes called spiral flutes.)

HELIX ANGLE—THREAD. The angle made by the helix of a thread at the pitch diameter with a plane perpendicular to the axis.

HOOK. The concave cutting face of a tap land between the crest and the root of thread.

INTERRUPTED THREAD. A tap having an odd number of lands, with every other tooth along the thread helix removed.

Tap Terms

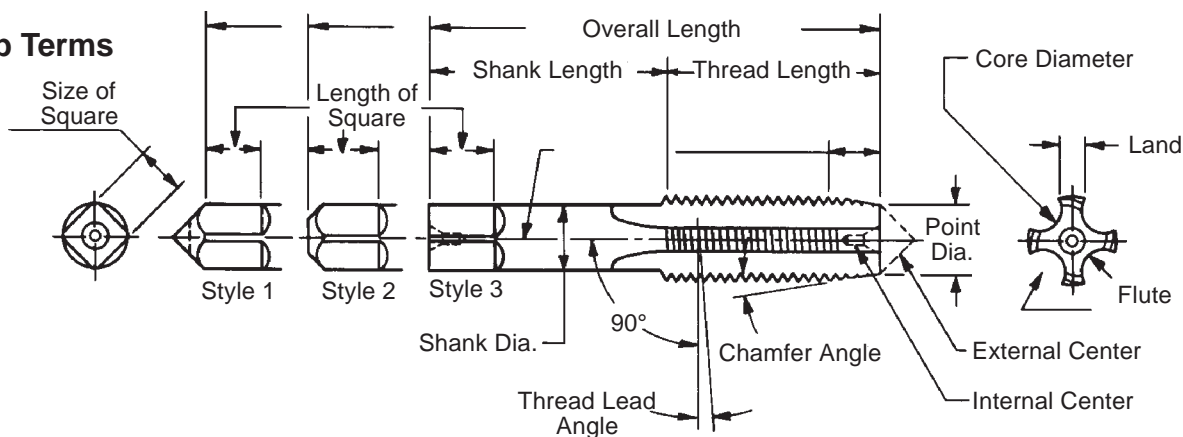

TECHNICAL INFORMATION



TABLE #18 WORD AND TERM DEFINITIONS APPLYING TO SCREW THREADS, TAPS AND DIES (continued)

LAND. One of the threaded sections between the flutes on a tap.

LEAD. The distance a screw thread advances axially in one complete turn. On a single-thread screw or tap, the lead and pitch are identical. On a double-thread, the lead is twice the pitch; on a triple-thread, the lead is three times the pitch, etc.

LEAD ERROR. The amount the actual lead of the screw thread differs from the specified lead.

LEAD—DRUNKEN. Irregular advance of the thread helix or lead. Usually called “drunken thread.”

LENGTH OF ENGAGEMENT. The length of contact between two mating threaded parts measured axially.

LIMITS. The maximum and minimum sizes permissible for a specific dimension. (See ALLOWANCE AND TOLERANCE)

MAJOR DIAMETER. The largest diameter of a straight thread. On a taper thread, the largest diameter at any given plane normal to the axis. The term “major diameter” replaces the term “outside diameter” as applied to the thread of a screw or tap and also the term “full diameter” as applied to the thread of a nut or die.

MINOR DIAMETER. The smallest diameter of a straight thread. On a taper thread, the smallest diameter at any given plane normal to the axis. The term “minor diameter” replaces the terms “root diameter” and “core diameter” as applied to the thread of a screw or tap and also the term “inside diameter” as applied to the thread of a nut or die.

PERCENT OF THREAD. One-half the difference between the basic major diameter and the actual minor diameter of an internal thread, divided by the basic thread height, expressed as percentage.

PITCH. The distance from a point on a screw thread to a corresponding point on the next thread, measured parallel to the axis and on the same side of the axis. The pitch equals one divided by the number of threads per inch.


PITCH DIAMETER. On a straight screw thread, the diameter of an imaginary cylinder, the surface of which would pass through the threads at such points as to make equal the width of the threads and the width of the spaces cut by the surface of the cylinder. On a taper screw thread, the diameter at a given distance from a reference plane perpendicular to the axis of an imaginary cone, the surface of which would pass through the threads at such points as to make equal the width of the threads and the width of the spaces cut by the surface of the cone.

PITCH LINE. A generator of the imaginary cylinder or cone specified in the definition of PITCH DIAMETER.

RAKE. On a tap, any deviation of a straight cutting face of the tooth from a radial line. Positive rake means that the crest of the cutting face is angularly advanced ahead of the balance of the face of the tooth. Negative rake means that the same point is angularly behind the balance of the cutting face of the tooth. Zero rake means that the cutting face is directly on the center line.

RELIEF—RADIAL. The clearance produced by removal of metal from behind the cutting edge. Taps should have the chamfer relieved and should have back taper, but may or may not have relief in the angle and on the major diameter of the threads. When the thread angle is relieved from heel to cutting edge, the tap is said to have “eccentric” relief. If relieved from heel for only a portion of land width (usually 2/3) the tap is said to have “con-eccentric” relief. (See BACK TAPER)

Rake Angles

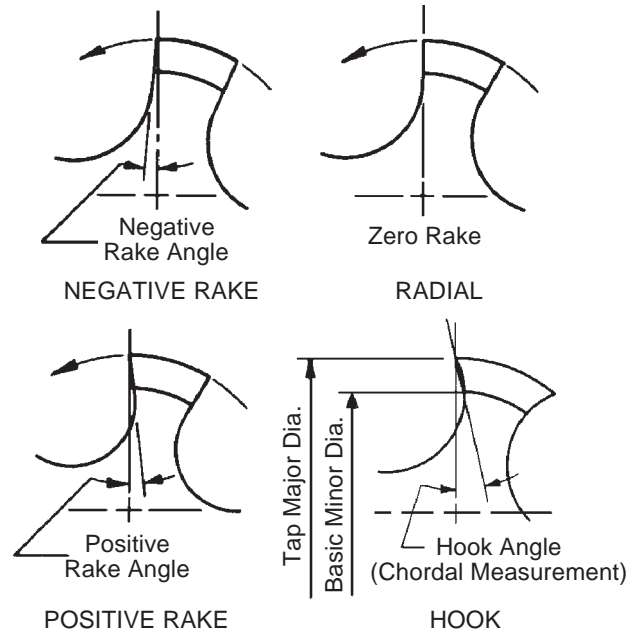

Pitch Dimensions

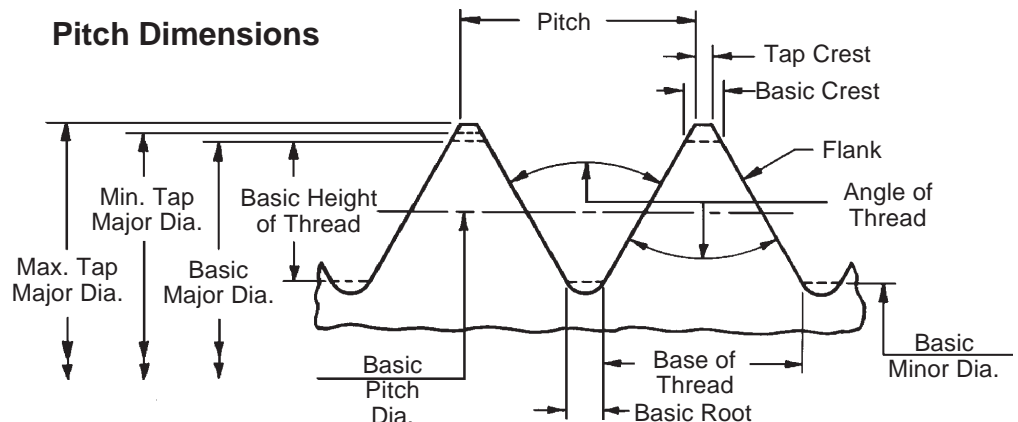




TABLE #18 WORD AND TERM DEFINITIONS APPLYING TO SCREW THREADS, TAPS AND DIES (continued)

Relief Styles

ROOT. The bottom surface joining the flanks of two adjacent threads. The root of an external thread is at its minor diameter, while the root of an internal thread is at its major diameter.

SCREW THREAD. A ridge of uniform section in the form of a helix on the external or internal surface of a cylinder, or in the form of a conical spiral on the external or internal surface of a cone. A thread formed on a cylinder is known as a "straight" or "parallel" thread, to distinguish it from a "taper" thread which is formed on a cone or frustum of a cone. All left-hand threads are designated LH.

SPIRAL POINT. A supplementary fluting, cut at an angle to the main fluting in the cutting face of the land. It is slightly longer than the chamfer on the tap and in the opposite hand to that of cutting rotation.

SIZE—BASIC. The theoretical size from which the limits of size for that dimension are derived by the application of the allowance and tolerances.


SIZE—NOMINAL. The designation used for general identification.

THREAD—SINGLE. A thread in which the lead is equal to the pitch.

THREAD—MULTIPLE. A thread in which the lead is an integral multiple of the pitch. On a double thread, the lead is equal to twice the pitch; on a triple thread, the lead is equal to three times the pitch, etc. Such threads have starting points relative to their multiple equally spaced around their circumference. For example, a double thread has two starting points 180° apart, etc.

THREAD—DRUNKEN. A thread in which the advance of the thread helix is irregular.


TOLERANCE. The amount of variation permitted in any dimension. Tolerance may be expressed as plus, minus, or both. A total tolerance is the sum of a plus and minus tolerance. Complete tolerances on threads include those for major diameter, minor diameter, pitch diameter, lead, half angle, and full angle. (See ALLOWANCE and LIMITS)

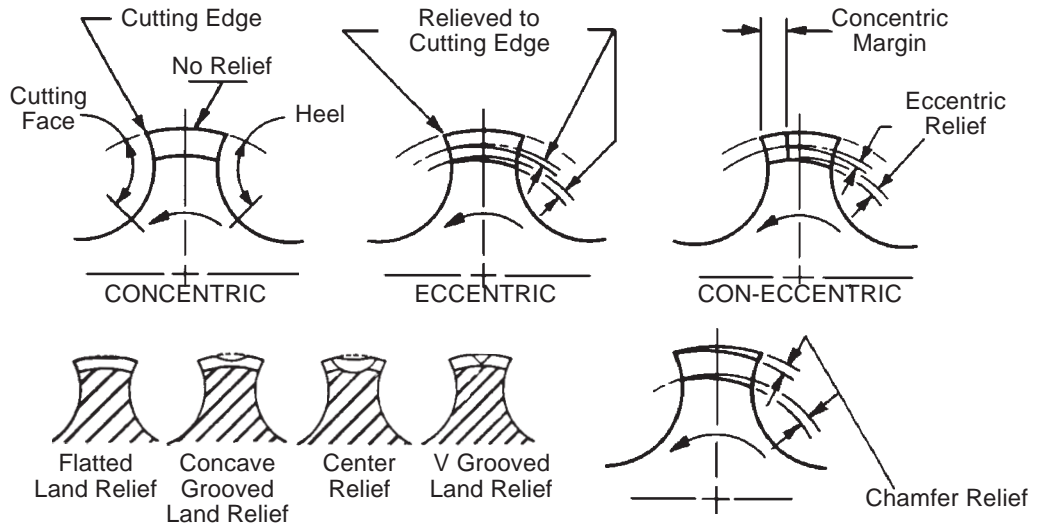

TRUNCATION—CREST. The distance measured perpendicular to the axis, between the sharp crest (or crest apex) and the cylinder or cone which bounds the crest.

TRUNCATION—ROOT. The distance, measured perpendicular to the axis, between the sharp root (or root apex) and the cylinder or cone which bounds the root.

Types of Tapped Holes

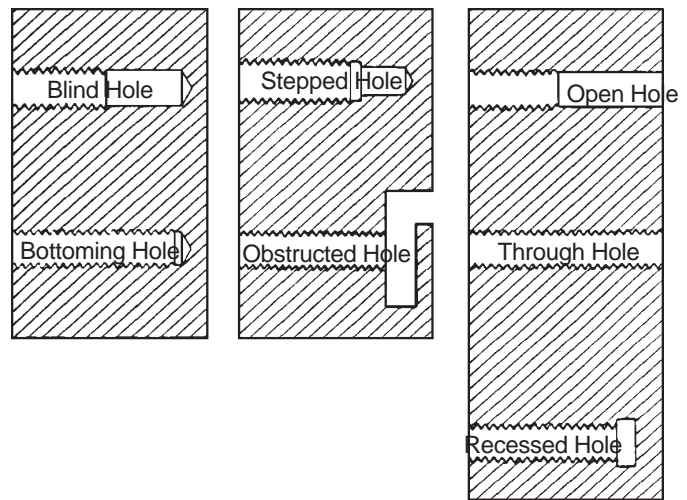

TECHNICAL INFORMATION

VERMONT TAP & DIE



Order Number	List Number	Page Number	Order Number	List Number	Page Number	Order Number	List Number	Page Number	Order Number	List Number	Page Number	Order Number	List Number	Page Number
174503	TN-3105	15	280504	TN-3112-HD	25	285370	TN-3712-AR	5	289566	1986	30	300199	3105	11
174504	TN-3105	15	280520	TN-3112-HD	25	285404	TN-3712-AR	5	289582	1986	30	300207	3105	11
174505	TN-3105	15	280553	TN-3112-HD	25	285420	TN-3712-AR	5	289590	1986	30	300249	3105	11
174506	TN-3105	15	280603	TN-3112-HD	26	285453	TN-3712-AR	5	289608	1986	30	300256	3105	11
174507	TN-3105	15	280652	TN-3112-HD	26	285479	TN-3712-AR	5	289616	1986	30	300264	3105	11
174508	TN-3105	15	280678	TN-3112-HD	26	285503	TN-3712-AR	5	289640	1986	30	300272	3105	11
174509	TN-3105	15	280702	TN-3112-HD	26	285552	TN-3712-AR	5	289657	1986	30	300278	TN-3105	11
174510	TN-3105	15	280751	TN-3112-HD	26	285602	TN-3712-AR	5	289665	1986	30	300280	3105	11
174511	TN-3105	14	280801	TN-3112-HD	26	285628	TN-3712-AR	5	289673	1986	30	300286	TN-3105	11
174512	TN-3105	14	280850	TN-3112-HD	26	285651	TN-3712-AR	5	289699	1986	30	300294	TN-3105	11
174513	TN-3105	15	280901	TN-3112-HD	26	285701	TN-3712-AR	5	289707	1986	30	300299	3105	11
174514	TN-3105	15	280959	TN-3112-HD	26	285750	TN-3712-AR	5	289715	1986	30	300393	TN-3105	11
174515	3105-M	17	280975	TN-3112-HD	26	285801	TN-3712-AR	5	289723	1986	30	300397	3105	11
174516	3105-M	17	281056	TN-3112-HD	26	285859	TN-3712-AR	5	289731	1986	30	300402	TN-3105	11
174517	3105-M	17	281957	TN-5155-HD	29	287004	TN-1986	30	289764	1986	31	300405	3105	11
174518	3105-M	17	282005	TN-5155-HD	29	287053	TN-1986	30	289772	1986	31	300413	3105	11
174519	3105-M	17	282054	TN-5155-HD	29	287103	TN-1986	30	289780	1986	31	300419	TN-3105	11
174520	3105-M	17	282056	3112-HD	26	287152	TN-1986	30	289798	1986	31	300512	3105	11
174521	3105-M	17	282062	TN-5155-HD	29	287202	TN-1986	30	289822	1986	31	300520	3105	11
174522	3105-M	17	282104	TN-5155-HD	29	287251	TN-1986	30	289830	1986	31	300526	TN-3105	11
174523	3105-M	17	282108	3112-HD	25	287301	TN-1986	30	289855	1986	31	300538	3105	11
174524	3105-M	17	282120	TN-5155-HD	29	287350	TN-1986	30	289889	1986	31	300637	3105	11
174528	TN-3105	15	282153	TN-5155-HD	29	287400	TN-1986	30	289897	1986	31	300645	3105	11
174529	TN-3105	15	282157	3112-HD	25	287459	TN-1986	30	289913	1986	31	300652	3105	11
174530	TN-3105	14	282179	TN-5155-HD	29	287509	TN-1986	30	289921	1986	31	300702	3105	11
174531	TN-3105	14	282203	TN-5155-HD	29	287558	TN-1986	30	289939	1986	31	300710	3105	11
174532	TN-3105	15	282207	3112-HD	25	287608	TN-1986	30	289954	1986	31	300769	3105	11
174533	TN-3105	15	282229	TN-5155-HD	29	287634	TN-1986	30	289962	1986	31	300778	3105	11
174534	TN-3105	15	282252	TN-5155-HD	29	287657	TN-1986	30	289970	1986	31	300793	3105	11
174535	TN-3105	15	282256	3112-HD	25	287665	TN-1986	30	289988	1986	31	300815	TN-3105	11
174536	TN-3105	14	282272	3112-HD	25	287707	TN-1986	30	289996	1986	31	300819	3105	11
174537	TN-3105	14	282278	TN-5155-HD	29	287756	TN-1986	30	290002	1986	31	300823	TN-3105	11
174538	TN-3105	15	282302	TN-5155-HD	29	287806	TN-1986	30	290010	1986	31	300827	3105	11
174539	TN-3105	15	282306	3112-HD	25	287855	TN-1986	30	291001	1986-M	31	300831	TN-3105	11
174540	TN-3105	15	282328	TN-5155-HD	29	287905	TN-1986	30	291006	TN-1986-M	31	300835	3105	11
174541	TN-3105	15	282351	TN-5155-HD	29	287954	TN-1986	30	291014	TN-1986-M	31	300918	3105	11
174542	TN-3105	15	282355	3112-HD	25	288002	TN-1986	30	291018	1986-M	31	300930	TN-3105	11
174543	TN-3105	15	282401	TN-5155-HD	29	288051	TN-1986	30	291083	1986-M	31	300934	3105	11
174544	TN-3105	15	282405	3112-HD	25	288101	TN-1986	31	291089	TN-1986-M	31	300942	3105	11
174545	TN-3105	15	282421	3112-HD	25	288150	TN-1986	31	291091	1986-M	31	300948	TN-3105	11
174546	TN-3105	15	282450	TN-5155-HD	29	288200	TN-1986	31	291097	TN-1986-M	31	300955	TN-3105	11
174547	TN-3105	15	282454	3112-HD	25	288259	TN-1986	31	291123	TN-1986-M	31	300959	3105	11
174548	3105-M	17	282468	TN-5155-HD	29	288309	TN-1986	31	291125	1986-M	31	301007	3105	11
174549	3105-M	17	282470	3112-HD	25	288358	TN-1986	31	291133	1986-M	31	301015	3105	11
174550	3105-M	17	282501	TN-5155-HD	29	288408	TN-1986	31	291139	TN-1986-M	31	301052	TN-3105	11
174551	3105-M	17	282504	3112-HD	25	288457	TN-1986	31	291162	TN-1986-M	31	301056	3105	11
174552	3105-M	17	282518	TN-5155-HD	29	289004	1986	30	291166	1986-M	31	301060	TN-3105	11
174553	3105-M	17	282520	3112-HD	25	289012	1986	30	291170	TN-1986-M	31	301064	3105	11
174559	3105-M	17	282526	TN-5155-HD	29	289020	1986	30	291174	1986-M	31	301072	3105	11
174560	3105-M	17	282542	TN-5155-HD	29	289038	1986	30	291176	1986-M	31	301078	TN-3105	11
174561	3105-M	17	282553	3112-HD	25	289046	1986	30	291178	1986-M	31	301079	3105	11
174562	3105-L	20	282559	TN-5155-HD	29	289053	1986	30	291179	1986-M	31	301177	TN-3105	11
174563	3105-L	20	282567	TN-5155-HD	29	289087	1986	30	291180	TN-1986-M	31	301185	TN-3105	11
174564	3105-L	20	282603	3112-HD	26	289095	1986	30	291181	1986-M	31	301189	3105	11
174565	3105-L	20	282609	TN-5155-HD	29	289111	1986	30	291182	TN-1986-M	31	301193	TN-3105	11
174566	3105-L	20	282617	TN-5155-HD	29	289160	1986	30	291240	1986-M	31	301197	3105	11
174567	3105-L	20	282625	TN-5155-HD	29	289178	1986	30	291246	TN-1986-M	31	301247	3105	11
174568	3105-L	20	282641	TN-5155-HD	29	289186	1986	30	291253	TN-1986-M	31	301254	3105	11
174569	3105-L	20	282652	3112-HD	26	289194	1986	30	291257	1986-M	31	301270	3105	11
174570	3105-L	20	282658	TN-5155-HD	29	289202	1986	30	291287	TN-1986-M	31	301288	3105	11
174571	3105-L	20	282678	3112-HD	26	289210	1986	30	291295	TN-1986-M	31	301296	3105	11
174572	3105-L	20	282702	3112-HD	26	289228	1986	30	298526	TN-3105-CH	21	301304	3105	11
174573	3105-L	20	282708	TN-5155-HD	29	289236	1986	30	298527	TN-3105-CH	21	301312	3105	11
174574	3105-L	20	282751	3112-HD	26	289244	1986	30	298528	TN-3105-CH	21	301320	3105	11
174575	3105-L	20	282757	TN-5155-HD	29	289251	1986	30	298529	TN-3105-CH	21	301338	3105	11
174576	3105-L	20	282765	TN-5155-HD	29	289269	1986	30	298530	TN-3105-CH	21	301346	3105	11
174577	3105-L	20	282799	TN-5155-HD	29	289277	1986	30	298531	TN-3105-CH	21	301353	3105	11
174578	3105-L	20	282801	3112-HD	26	289285	1986	30	298532	TN-3105-CH	21	301359	TN-3105	11
174579	3105-L	20	282807	TN-5155-HD	29	289293	1986	30	298533	TN-3105-CH	21	301361	3105	11
272544	3112-MHD	26	282815	TN-5155-HD	29	289301	1986	30	298534	TN-3105-CH	21	301367	TN-3105	11
272546	3112-MHD	26	282823	TN-5155-HD	29	289319	1986	30	298535	TN-3105-CH	21	301375	TN-3105	11
272548	3112-MHD	26	282850	3112-HD	26	289335	1986	30	298536	TN-3105-CH	21	301379	3105	11
272550	3112-MHD	26	282856	TN-5155-HD	29	289343	1986	30	300017	3105	11	301429	3105	11
272552	3112-MHD	26	282872	TN-5155-HD	29	289350	1986	30	300025	3105	11	301474	TN-3105	11
272554	3112-MHD	26	282901	3112-HD	26	289368	1986	30	300041	3105	11	301478	3105	11
272556	3112-MHD	26	282906	TN-5155-HD	29	289376	1986	30	300047	TN-3105	11	301482	TN-3105	11
280108	TN-3112-HD	25	282922	TN-5155-HD	29	289384	1986	30	300054	TN-3105	11	301486	3105	11
280157	TN-3112-HD	25	282959	3112-HD	26	289392	1986	30	300058	3105	11	301490	TN-3105	11
280207	TN-3112-HD	25	282975	3112-HD	26	289426	1986	30	300066	3105	11	301494	3105	11
280256	TN-3112-HD	25	285057	TN-3712-AR	5	289434	1986	30	300074	3105	11	301544	3105	11
280272	TN-3112-HD	25	285107	TN-3712-AR	5	289442	1986	30	300082	3105	11	301551	3105	11
280306	TN-3112-HD	25	285156	TN-3712-AR	5	289459	1986	30	300108					



VERMONT TAP & DIE

Order Number	List Number	Page Number	Order Number	List Number	Page Number	Order Number	List Number	Page Number	Order Number	List Number	Page Number	Order Number	List Number	Page Number
301676	3105	12	305236	TN-3105	12	306345	3105	13	307836	TN-3105	14	318027	3105-L	20
301692	3105	11	305255	3105	12	306394	3105	13	307844	TN-3105	14	318035	3105-L	20
301702	3105	11	305263	3105	12	306440	TN-3105	13	307848	3105	14	318050	3105-L	20
301718	3105	11	305347	3105	12	306444	3105	13	307863	3105	14	318068	3105-L	20
301726	3105	11	305354	3105	12	306451	3105	13	307869	TN-3105	14	318076	3105-L	20
301734	3105	11	305370	3105	12	306457	TN-3105	13	308065	TN-3105	14	318084	3105-L	20
301742	3105	12	305388	3105	12	306465	TN-3105	13	308069	3105	14	318092	3105-L	20
301748	TN-3105	12	305392	TN-3105	12	306469	3105	13	308073	TN-3105	14	318100	3105-L	20
301755	TN-3105	12	305396	3105	12	306481	TN-3105	13	308077	3105	14	318118	3105-L	20
301759	3105	12	305403	TN-3105	12	306485	3105	13	308081	TN-3105	14	318126	3105-L	20
301763	TN-3105	12	305404	3105	12	306622	TN-3105	13	308085	3105	14	318134	3105-L	20
301767	3105	12	305412	3105	12	306626	3105	13	308101	3105	14	318142	3105-L	20
301908	3105	12	305418	TN-3105	12	306630	TN-3105	13	308107	TN-3105	14	318159	3105-L	20
301920	TN-3105	12	305434	TN-3105	12	306634	3105	13	308184	3105	14	318167	3105-L	20
301924	3105	12	305438	3105	12	306642	3105	13	308192	3105	14	318175	3105-L	20
301933	3105	12	305442	TN-3105	12	306648	TN-3105	13	308200	3105	14	318183	3105-L	20
301938	TN-3105	12	305446	3105	12	306725	3105	13	308275	3105	14	323506	3105	11
301940	3105	12	305461	3105	12	306741	3105	13	308283	3105	14	323514	3105	11
301946	TN-3105	12	305479	3105	12	306747	TN-3105	13	308291	3105	14	323563	3105	12
301999	3105	12	305495	3105	12	306754	TN-3105	13	308424	3105	14	323688	3105	12
302021	3105	12	305503	3105	12	306758	3105	13	308432	3105	14	325006	3105	12
302039	3105	12	305511	3105	12	306762	TN-3105	13	308440	3105	14	325048	3105	12
302112	3105	12	305517	TN-3105	12	306766	3105	13	308457	3105	14	325089	3105	13
302120	3105	12	305525	TN-3105	12	306782	3105	13	308465	3105	14	325121	3105	13
302146	3105	12	305529	3105	12	306788	TN-3105	13	308473	3105	14	325162	3105	13
302161	3105	12	305533	TN-3105	12	306923	3105	13	308549	3105	14	325204	3105	13
302179	3105	12	305537	3105	12	306929	TN-3105	13	308556	3105	14	326002	TN-3105	12
302187	3105	12	305552	3105	13	306931	3105	13	308564	3105	14	326004	3105	12
302191	TN-3105	12	305560	3105	13	306937	TN-3105	13	308572	3105	14	326012	3105	12
302195	3105	12	305563	TN-3105	13	306945	TN-3105	13	308580	3105	14	326018	TN-3105	12
302203	3105	12	305644	3105	13	306949	3105	13	308598	3105	14	326087	3105	12
302209	TN-3105	12	305651	3105	13	306960	TN-3105	13	308663	3105	14	326095	3105	12
302211	3105	12	305677	3105	13	306964	3105	13	308671	3105	14	326160	3105	12
302217	TN-3105	12	305685	3105	13	306972	3105	13	308689	3105	14	326166	TN-3105	12
302260	3105	12	305693	3105	13	306978	TN-3105	13	308697	3105	14	326174	TN-3105	12
302278	3105	12	305699	TN-3105	13	307020	3105	13	308705	3105	14	326178	3105	12
302294	3105	12	305701	3105	13	307042	TN-3105	13	308713	3105	14	326240	TN-3105	12
302302	3105	12	305707	TN-3105	13	307046	3105	13	308788	3105	14	326244	3105	12
302385	3105	12	305715	TN-3105	13	307053	3105	13	308796	3105	14	326251	3105	12
302393	3105	12	305719	3105	13	307059	TN-3105	13	308804	3105	14	326285	3105	12
302402	3105	12	305731	TN-3105	13	307061	3105	13	308812	3105	14	326293	3105	12
302419	3105	12	305735	3105	13	307067	TN-3105	13	308820	3105	14	326364	TN-3105	12
302427	3105	12	305743	3105	13	307083	TN-3105	13	308838	3105	14	326368	3105	12
302435	3105	12	305749	TN-3105	13	307087	3105	13	313102	3105-L	20	326376	3105	12
302443	3105	12	305768	3105	13	307091	TN-3105	13	313119	3105-L	20	326442	3105	12
302450	3105	12	305776	3105	13	307095	3105	13	317508	3105-L	20	326459	3105	12
302464	TN-3105	12	305792	3105	13	307160	3105	13	317516	3105-L	20	326521	TN-3105	13
302468	3105	12	305802	3105	13	307178	3105	13	317524	3105-L	20	326525	3105	13
302472	TN-3105	12	305814	TN-3105	13	307186	3105	13	317540	3105-L	20	326533	3105	13
302476	3105	12	305818	3105	13	307194	3105	13	317565	3105-L	20	326539	TN-3105	13
302480	TN-3105	12	305822	TN-3105	13	307202	3105	13	317573	3105-L	20	326604	TN-3105	13
302484	3105	12	305826	3105	13	307210	3105	13	317581	3105-L	20	326608	3105	13
302522	TN-3105	12	305830	TN-3105	13	307327	3105	13	317599	3105-L	20	326616	3105	13
302526	3105	12	305834	3105	13	307343	3105	13	317607	3105-L	20	326640	3105	13
302530	TN-3105	12	305859	3105	13	307349	TN-3105	13	317615	3105-L	20	326681	3105	13
302534	3105	12	305867	3105	13	307350	3105	13	317623	3105-L	20	326687	TN-3105	13
302542	3105	12	305990	3105	13	307356	TN-3105	13	317631	3105-L	20	326692	TN-3105	13
302548	TN-3105	12	305996	TN-3105	13	307364	TN-3105	13	317649	3105-L	20	326699	3105	13
302567	3105	12	306002	TN-3105	13	307368	3105	13	317656	3105-L	20	326707	3105	13
302583	3105	12	306006	3105	13	307380	TN-3105	13	317664	3105-L	20	327139	3105-CI	18
302591	3105	12	306010	TN-3105	13	307384	3105	13	317672	3105-L	20	327147	3105-CI	18
302609	3105	12	306014	3105	13	307392	3105	13	317680	3105-L	20	327155	3105-CI	18
305008	3105	12	306030	3105	13	307398	TN-3105	13	317698	3105-L	20	327163	3105-CI	18
305016	3105	12	306036	TN-3105	13	307418	3105	13	317706	3105-L	20	327171	3105-CI	18
305024	3105	12	306044	TN-3105	13	307442	3105	13	317714	3105-L	20	327179	3105-CI	18
305033	3105	12	306048	3105	13	307463	TN-3105	13	317722	3105-L	20	327187	3105-CI	18
305040	3105	12	306113	3105	13	307467	3105	13	317730	3105-L	20	327195	3105-CI	18
305057	3105	12	306119	TN-3105	13	307471	TN-3105	13	317748	3105-L	20	327203	3105-CI	18
305061	TN-3105	12	306121	3105	13	307475	3105	13	317755	3105-L	20	327211	3105-CI	18
305065	3105	12	306127	TN-3105	13	307483	3105	13	317763	3105-L	20	327219	3105-CI	18
305073	3105	12	306135	TN-3105	13	307489	TN-3105	13	317771	3105-L	20	327227	3105-CI	18
305079	TN-3105	12	306139	3105	13	307505	TN-3105	13	317789	3105-L	20	327235	3105-CI	18
305081	3105	12	306154	3105	13	307509	3105	13	317797	3105-L	20	327243	3105-CI	18
305087	TN-3105	12	306157	TN-3105	13	307513	TN-3105	13	317805	3105-L	20	327251	3105-CI	18
305103	TN-3105	12	306162	3105	13	307517	3105	13	317813	3105-L	20	327259	3105-CI	18
305107	3105	12	306165	TN-3105	13	307703	TN-3105	14	317821	3105-L	20	327267	3105-CI	18
305111	TN-3105	12	306246	3105	13	307707	3105	14	317847	3105-L	20	327275	3105-CI	18
305115	3105	12	306253	3105	13	307711	TN-3105	14	317862	3105-L	20	327283	3105-CI	18
305164	3105	12	306291	TN-3105	13	307715	3105	14	317870	3105-L	20	327291	3105-CI	18
305198	3105	12	306295	3105	13	307723	3105	14	317888	3105-L	20	327309	3105-CI	18
305206	3105	12	306303	3105	13	307729	TN-3105	14	317896	3105-L	20	327311	3105-CI	18
305209	TN-3105	12	306309	TN-3105	13	307745	TN-3105	14	317904	3105-L	20	327315	3105-CI	18
305210	TN-3105	12	306311	3105	13	307749	3105	14	317912	3105-L	20	327316	3105-CI	18
305214	3105	12	306317	TN-3105	13	307806	3105	14	317987	3105-L	20	327317	3105-CI	18
305222	3105	12	306333	TN-3105										

VERMONT TAP & DIE



Order Number	List Number	Page Number	Order Number	List Number	Page Number	Order Number	List Number	Page Number	Order Number	List Number	Page Number	Order Number	List Number	Page Number
327341	3105-CI	18	327732	3105-H	17	328720	TN-3105-M	16	330326	3712-SM	6	330465	5750-SM	7
327358	3105-CI	18	327734	3105-H	17	328752	3105-M	16	330327	3712-SM	6	330466	5750-SM	7
327366	3105-CI	18	327736	3105-H	17	328760	3105-M	16	330328	3712-SM	6	330467	5750-SM	7
327368	3105-CI	18	327740	3105-H	17	328778	3105-M	16	330329	3712-SM	6	330468	5750-SM	7
327371	3105-CI	18	327742	3105-H	17	328810	3105-M	16	330330	3712-SM	6	330469	5750-SM	7
327372	3105-CI	18	327744	3105-H	17	328828	3105-M	16	330331	3712-SM	6	330470	5750-SM	7
327374	3105-CI	19	327746	3105-H	17	328836	3105-M	16	330332	3712-SM	6	330471	5750-SM	7
327382	3105-CI	19	327752	3105-H	17	328877	3105-M	16	330333	3712-SM	6	330472	5750-SM	7
327390	3105-CI	19	327754	3105-H	17	328885	3105-M	16	330334	3712-SM	6	330473	5750-SM	7
327408	3105-CI	19	327760	3105-H	17	328893	3105-M	16	330335	3712-SM	6	330474	5750-SM	7
327416	3105-CI	19	327762	3105-H	17	328935	3105-M	16	330336	3712-SM	6	330475	5750-SM	7
327424	3105-CI	19	327764	3105-H	17	328943	3105-M	16	330337	3712-SM	6	330476	5750-SM	7
327426	3105-CI	19	327766	3105-H	17	328950	3105-M	16	330338	3712-SM	6	330477	5750-SM	7
327428	3105-CI	19	327772	3105-H	17	329057	3105-M	16	330339	3712-SM	6	330478	5750-SM	7
327430	3105-CI	19	327774	3105-H	17	329065	3105-M	16	330340	3712-SM	6	330479	5750-SM	7
327432	3105-CI	19	327780	3105-H	17	329073	3105-M	16	330341	3712-SM	6	330480	5750-SM	7
327440	3105-CI	19	327782	3105-H	17	329172	3105-M	16	330342	3712-SM	6	330481	5750-SM	7
327457	3105-CI	19	327784	3105-H	17	329180	3105-M	16	330344	3712-SM	6	330482	5750-SM	7
327465	3105-CI	19	327786	3105-H	17	329198	3105-M	16	330345	3712-SM	6	330483	5750-SM	7
327473	3105-CI	19	327792	3105-H	17	329297	3105-M	16	330346	3712-SM	6	330484	5750-SM	7
327481	3105-CI	19	327794	3105-H	17	329305	3105-M	16	330347	3712-SM	6	330485	5750-SM	7
327483	3105-CI	19	327802	3105-H	17	329313	3105-M	16	330348	3712-SM	6	330486	5750-SM	7
327485	3105-CI	19	327804	3105-H	17	330259	3705-HDCI	10	330349	3712-SM	6	330487	5750-SM	7
327487	3105-CI	19	327812	3105-H	17	330260	3705-HDCI	10	330350	3712-SM	6	330488	5750-SM	7
327499	3105-CI	19	327814	3105-H	17	330261	3705-HDCI	10	330351	3712-SM	6	330489	5750-SM	7
327507	3105-CI	19	327822	3105-H	17	330262	3705-HDCI	10	330352	3712-SM	6	330490	5750-SM	7
327515	3105-CI	19	327824	3105-H	17	330263	3705-HDCI	10	330353	3712-HM	8	330491	5750-SM	7
327523	3105-CI	19	328018	3105-M	16	330264	3705-HDCI	10	330354	3712-HM	8	330492	5750-SM	7
327531	3105-CI	19	328067	3105-M	16	330265	3705-HDCI	10	330355	3712-HM	8	330493	5750-SM	7
327549	3105-CI	19	328075	3105-M	16	330266	3705-HDCI	10	330356	3712-HM	8	330494	5750-SM	7
327551	3105-CI	19	328083	3105-M	16	330267	3705-HDCI	10	330357	3712-HM	8	330495	5750-SM	7
327553	3105-CI	19	328166	3105-M	16	330268	3705-HDCI	10	330358	3712-HM	8	330496	5750-SM	7
327555	3105-CI	19	328182	3105-M	16	330269	3705-HDCI	10	330359	3712-HM	8	330497	5750-SM	7
327557	3105-CI	19	328188	TN-3105-M	16	330270	3705-HDCI	10	330360	3712-HM	8	330498	5750-SM	7
327559	3105-CI	19	328190	3105-M	16	330271	3705-HDCI	10	330361	3712-HM	8	330499	5750-SM	7
327561	3105-CI	19	328205	TN-3105-M	16	330272	3705-HDCI	10	330362	3712-HM	8	330502	5750-SM	7
327563	3105-CI	19	328208	3105-M	16	330273	3705-HDCI	10	330363	3712-HM	8	330503	5750-SM	7
327565	3105-CI	19	328257	3105-M	16	330274	3705-HDCI	10	330364	3712-HM	8	330504	5750-SM	7
327567	3105-CI	19	328273	3105-M	16	330275	3705-HDCI	10	330365	3712-HM	8	330505	5750-SM	7
327569	3105-CI	19	328281	3105-M	16	330276	3705-HDCI	10	330366	3712-HM	8	330506	5750-SM	7
327571	3105-CI	19	328287	TN-3105-M	16	330277	3705-HDCI	10	330367	3712-HM	8	330507	5750-SM	7
327573	3105-CI	19	328295	TN-3105-M	16	330278	3705-HDCI	10	330368	3712-HM	8	330508	5750-HM	9
327575	3105-CI	19	328299	3105-M	16	330279	3705-HDCI	10	330369	3712-HM	8	330509	5750-HM	9
327577	3105-CI	19	328349	3105-M	16	330280	3705-HDCI	10	330370	3712-HM	8	330510	5750-HM	9
327579	3105-CI	19	328364	3105-M	16	330281	3705-HDCI	10	330371	3712-HM	8	330511	5750-HM	9
327581	3105-CI	19	328372	3105-M	16	330282	3705-HDCI	10	330372	3712-HM	8	330512	5750-HM	9
327583	3105-CI	19	328378	TN-3105-M	16	330283	3705-HDCI	10	330373	3712-HM	8	330513	5750-HM	9
327585	3105-CI	19	328380	3105-M	16	330284	3705-HDCI	10	330374	3712-HM	8	330514	5750-HM	9
327587	3105-CI	19	328386	TN-3105-M	16	330285	3705-HDCI	10	330375	3712-HM	8	330515	5750-HM	9
327589	3105-CI	19	328422	3105-M	16	330286	3705-HDCI	10	330376	3712-HM	8	330516	5750-HM	9
327591	3105-CI	19	328430	3105-M	16	330287	3705-HDCI	10	330377	3712-HM	8	330517	5750-HM	9
327593	3105-CI	19	328436	TN-3105-M	16	330288	3705-HDCI	10	330378	3712-HM	8	330518	5750-HM	9
327595	3105-CI	19	328444	TN-3105-M	16	330289	3705-HDCI	10	330379	3712-HM	8	330519	5750-HM	9
327597	3105-CI	19	328448	3105-M	16	330290	3705-HDCI	10	330380	3712-HM	8	330520	5750-HM	9
327599	3105-CI	19	328463	3105-M	16	330291	3705-HDCI	10	330381	3712-HM	8	330521	5750-HM	9
327601	3105-CI	19	328489	3105-M	16	330292	3705-HDCI	10	330382	3712-HM	8	330522	5750-HM	9
327603	3105-CI	19	328497	3105-M	16	330293	3705-HDCI	10	330383	3712-HM	8	330523	5750-HM	9
327605	3105-CI	19	328505	3105-M	16	330294	3705-HDCI	10	330384	3712-HM	8	330524	5750-HM	9
327607	3105-CI	19	328547	3105-M	16	330295	3705-HDCI	10	330385	3712-HM	8	330525	5750-HM	9
327609	3105-CI	19	328550	TN-3105-M	16	330296	3705-HDCI	10	330386	3712-HM	8	330526	5750-HM	9
327611	3105-CI	19	328554	3105-M	16	330297	3705-HDCI	10	330387	3712-HM	8	330527	5750-HM	9
327613	3105-CI	19	328562	3105-M	16	330298	3705-HDCI	10	330388	3712-HM	8	330528	5750-HM	9
327615	3105-CI	19	328568	TN-3105-M	16	330299	3705-HDCI	10	330389	3712-HM	8	330529	5750-HM	9
327617	3105-CI	19	328604	3105-M	16	330302	3712-SM	6	330390	3712-HM	8	330530	5750-HM	9
327619	3105-CI	19	328612	3105-M	16	330303	3712-SM	6	330391	3712-HM	8	330531	5750-HM	9
327621	3105-CI	19	328618	TN-3105-M	16	330304	3712-SM	6	330392	3712-HM	8	330532	5750-HM	9
327650	3105-CIM	19	328620	3105-M	16	330305	3712-SM	6	330393	3712-HM	8	330533	5750-HM	9
327652	3105-CIM	19	328626	TN-3105-M	16	330306	3712-SM	6	330394	3712-HM	8	330534	5750-HM	9
327654	3105-CIM	19	328661	3105-M	16	330307	3712-SM	6	330395	3712-HM	8	330535	5750-HM	9
327656	3105-CIM	19	328675	TN-3105-M	16	330308	3712-SM	6	330396	3712-HM	8	330536	5750-HM	9
327658	3105-CIM	19	328679	3105-M	16	330309	3712-SM	6	330397	3712-HM	8	330537	5750-HM	9
327660	3105-CIM	19	328683	TN-3105-M	16	330310	3712-SM	6	330398	3712-HM	8	330538	5750-HM	9
327662	3105-CIM	19	328685	TN-3105-M	16	330311	3712-SM	6	330399	3712-HM	8	330539	5750-HM	9
327664	3105-CIM	19	328686	TN-3105-M	16	330312	3712-SM	6	330400	3712-HM	8	330540	5750-HM	9
327666	3105-CIM	19	328687	3105-M	16	330313	3712-SM	6	330401	3712-HM	8	330541	5750-HM	9
327668	3105-CIM	19	328689	TN-3105-M	16	330314	3712-SM	6	330402	3712-HM	8	330542	5750-HM	9
327670	3105-CIM	19	328693	TN-3105-M	16	330315	3712-SM	6	330403	3712-HM	8	330543	5750-HM	9
327672	3105-CIM	19	328697	TN-3105-M	16	330316	3712-SM	6	330455	5750-SM	7	330544	5750-HM	9
327710	3105-H	17	328707	TN-3105-M	16	330317	3712-SM	6	330456	5750-SM	7	330545	5750-HM	9
327712	3105-H	17	328708	TN-3105-M	16	330318	3712-SM	6	330457	5750-SM	7	330546	5750-HM	9
327714	3105-H	17	328710	TN-3105-M	16	330319	3712-SM	6	330458	5750-SM	7	330547	5750-HM	9
327716	3105-H	17	328711	TN-3105-M	16	330320	3712-SM	6	330459	5750-SM	7	330548	5750-HM	9
327720														



VERMONT TAP & DIE

Order Number	List Number	Page Number	Order Number	List Number	Page Number	Order Number	List Number	Page Number	Order Number	List Number	Page Number	Order Number	List Number	Page Number
330553	5750-HM	9	330795	TCN-5750-HM	9	343504	TN3105-M	17	356703	TN-3112	22	357843	3112	24
330554	5750-HM	9	330796	TCN-5750-HM	9	343505	TN3105-M	17	356704	3112	22	357850	3112	24
330555	5750-HM	9	330797	TCN-5750-HM	9	343506	TN3105-M	17	356712	3112	22	357864	TN-3112	24
330556	5750-HM	9	330798	TCN-5750-HM	9	343507	TN3105-M	17	356718	TN-3112	22	357868	3112	24
330557	5750-HM	9	330799	TCN-5750-HM	9	343508	TN3105-M	17	356720	3112	22	357876	3112	24
330558	5750-HM	9	330802	TCN-5750-HM	9	343509	TN3105-M	17	356726	TN-3112	22	357879	TN-3112	24
330714	TN-3712-SM	6	330803	TCN-5750-HM	9	343510	TN3105-M	17	356738	3112	22	357922	TN-3112	24
330715	TN-3712-SM	6	330804	TCN-5750-HM	9	343511	TN3105-M	17	356742	TN-3112	22	357926	3112	24
330716	TN-3712-SM	6	330805	TCN-5750-HM	9	343512	TN3105-M	17	356746	3112	22	357930	TN-3112	24
330717	TN-3712-SM	6	330951	TN-3712-SM	6	343513	TN3105-M	17	356753	3112	22	357934	3112	24
330718	TN-3712-SM	6	330952	TCN-3712-HM	8	343514	TN3105-M	17	356761	3112	22	357942	3112	24
330719	TN-3712-SM	6	339044	TN-3105	11	343515	TN3105-M	17	356767	TN-3112	22	357963	TN-3112	24
330720	TN-3712-SM	6	339045	TN-3105	11	343516	TN3105-M	17	356775	TN-3112	22	357967	3112	24
330721	TN-3712-SM	6	339046	TN-3105	11	343517	TN3105-M	17	356779	3112	22	357971	TN-3112	24
330722	TN-3712-SM	6	339047	TN-3105	11	343518	TN3105-M	17	356803	3112	22	357975	3112	24
330723	TN-3712-SM	6	339048	TN-3105	11	355802	TN-3105	14	356809	TN-3112	23	358490	TN-3112	23
330724	TN-3712-SM	6	339049	TN-3105	14	355803	TN-3105	14	356841	TN-3112	23	358494	3112	23
330725	TN-3712-SM	6	339050	TN-3105	14	355804	TN-3105	15	356845	3112	23	358510	3112	23
330726	TN-3712-SM	6	339051	TN-3105	14	355805	TN-3105	15	357009	3112	23	358516	TN-3112	23
330727	TN-3712-SM	6	339052	TN-3105	14	355807	TN-3105	15	357021	TN-3112	23	358532	TN-3112	23
330728	TN-3712-SM	6	339053	TN-3105	14	355808	TN-3105	15	357025	3112	23	358536	3112	23
330729	TN-3712-SM	6	339054	TN-3105	14	355809	TN-3105	15	357041	3112	23	358551	3112	23
330730	TN-3712-SM	6	339055	TN-3105	14	356002	3112	22	357047	TN-3112	23	358565	TN-3112	24
330731	TN-3712-SM	6	339056	TN-3105	14	356019	3112	22	357054	TN-3112	23	358569	3112	24
330732	TN-3712-SM	6	339057	TN-3105	14	356023	TN-3112	22	357058	3112	23	358585	3112	24
330733	TN-3712-SM	6	339058	TN-3105	14	356027	3112	22	357062	TN-3112	23	359005	3112	22
330734	TN-3712-SM	6	339059	TN-3105	14	356035	3112	22	357066	3112	23	359013	3112	22
330735	TN-3712-SM	6	339060	TN-3105	14	356043	3112	22	357082	3112	23	359047	3112	22
330736	TCN-3712-HM	8	339061	TN-3105	14	356061	TN-3112	22	357088	TN-3112	23	359054	3112	22
330737	TCN-3712-HM	8	339062	TN-3105	14	356068	3112	22	357101	TN-3112	23	359084	TN-3112	22
330738	TCN-3712-HM	8	339063	TN-3105	14	356084	3112	22	357108	3112	23	359088	3112	22
330739	TCN-3712-HM	8	341524	3105	14	356102	3112	22	357124	3112	23	359120	3112	23
330740	TCN-3712-HM	8	341540	3105	14	356106	TN-3112	22	357140	3112	23	359123	TN-3112	23
330741	TCN-3712-HM	8	341573	3105	14	356126	3112	22	357161	TN-3112	23	360755	3112-M	24
330742	TCN-3712-HM	8	341581	3105	14	356134	3112	22	357165	3112	23	360771	3112-M	24
330743	TCN-3712-HM	8	341599	3105	14	356142	3112	22	357173	3112	23	360774	TN-3112-M	24
330744	TCN-3712-HM	8	341607	3105	14	356148	TN-3112	22	357179	TN-3112	23	360797	3112-M	24
330745	TCN-3712-HM	8	341623	3105	14	356159	3112	22	357181	3112	23	360801	TN-3112-M	24
330746	TCN-3712-HM	8	341649	3105	14	356183	3112	22	357207	3112	23	360805	3112-M	24
330747	TCN-3712-HM	8	341664	3105	14	356189	TN-3112	22	357215	3112	23	360821	3112-M	24
330748	TCN-3712-HM	8	341672	3105	14	356221	TN-3112	22	357223	3112	23	360835	TN-3112-M	24
330749	TCN-3712-HM	8	341698	3105	15	356225	3112	22	357226	TN-3112	23	360839	3112-M	24
330750	TCN-3712-HM	8	341706	3105	15	356233	3112	22	357249	3112	23	360854	3112-M	24
330751	TCN-3712-HM	8	341714	3105	15	356241	3112	22	357264	3112	23	360862	3112-M	24
330752	TCN-3712-HM	8	341730	3105	15	356262	TN-3112	22	357280	3112	23	360868	TN-3112-M	24
330753	TCN-3712-HM	8	341748	3105	15	356266	3112	22	357286	TN-3112	23	360884	TN-3112-M	24
330754	TCN-3712-HM	8	341755	3105	15	356282	3112	22	357294	TN-3112	23	360888	3112-M	24
330755	TCN-3712-HM	8	341771	3105	15	356308	3112	22	357298	3112	23	360896	3112-M	24
330756	TCN-3712-HM	8	341789	3105	15	356320	TN-3112	22	357302	TN-3112	23	360904	3112-M	24
330757	TCN-3712-HM	8	341805	3105	15	356324	3112	22	357306	3112	23	360920	3112-M	24
330758	TN-5750-SM	7	341813	3105	15	356332	3112	22	357322	3112	23	360926	TN-3112-M	24
330759	TN-5750-SM	7	341821	3105	15	356338	TN-3112	22	357328	TN-3112	23	360942	TN-3112-M	24
330760	TN-5750-SM	7	341839	3105	15	356361	TN-3112	22	357344	TN-3112	23	360946	3112-M	24
330761	TN-5750-SM	7	342514	3105	15	356365	3112	22	357348	3112	23	360961	3112-M	24
330762	TN-5750-SM	7	342522	3105	15	356381	3112	22	357363	3112	23	360967	TN-3112-M	24
330763	TN-5750-SM	7	342530	3105	15	356402	TN-3112	22	357389	3112	23	360995	3112-M	24
330764	TN-5750-SM	7	342555	3105	15	356403	TN-3112	22	357401	TN-3112	23	361019	3112-M	24
330765	TN-5750-SM	7	342563	3105	15	356407	3112	22	357405	3112	23	361035	3112-M	24
330766	TN-5750-SM	7	342589	3105	15	356415	3112	22	357413	3112	23	361050	3112-M	24
330767	TN-5750-SM	7	342597	3105	15	356419	3112	22	357419	TN-3112	23	365648	5150	27
330768	TN-5750-SM	7	342605	3105	15	356420	TN-3112	22	357421	3112	23	365655	5150	27
330769	TN-5750-SM	7	342613	3105	15	356421	3112	22	357427	TN-3112	23	365675	TN-5150	27
330770	TN-5750-SM	7	342621	3105	15	356422	3112	22	357447	3112	23	365676	5150	27
330771	TN-5750-SM	7	342639	3105	15	356486	TN-3112	22	357462	3112	23	365677	TN-5150	27
330772	TN-5750-SM	7	342647	3105	15	356498	3112	22	357488	3112	23	365678	5150	27
330773	TN-5750-SM	7	342654	3105	15	356502	TN-3112	22	357504	3112	23	365679	TN-5150	27
330774	TN-5750-SM	7	342662	3105	15	356506	3112	22	357520	3112	23	365680	TN-5150	27
330775	TN-5750-SM	7	342670	3105	15	356510	TN-3112	22	357526	TN-3112	23	365685	TN-5150	27
330776	TN-5750-SM	7	342688	3105	15	356514	3112	22	357542	TN-3112	23	365689	5150	27
330777	TN-5750-SM	7	342696	3105	15	356544	TN-3112	22	357546	3112	23	365693	TN-5150	27
330778	TN-5750-SM	7	342704	3105	15	356548	3112	22	357561	3112	23	365697	5150	27
330779	TN-5750-SM	7	342712	3105	15	356555	3112	22	357587	3112	23	365721	5150	27
330780	TN-5750-SM	7	342720	3105	15	356563	3112	22	357603	3112	23	365727	TN-5150	27
330781	TCN-5750-HM	9	342738	3105	15	356569	TN-3112	22	357609	TN-3112	23	365735	TN-5150	27
330782	TCN-5750-HM	9	342746	3105	15	356585	TN-3112	22	357629	3112	23	365739	5150	27
330783	TCN-5750-HM	9	342753	3105	15	356589	3112	22	357660	3112	23	365743	TN-5150	27
330784	TCN-5750-HM	9	342761	3105	15	356597	3112	22	357682	TN-3112	23	365747	5150	27
330785	TCN-5750-HM	9	342779	3105	15	356602	TN-3112	22	357686	3112	23	365750	TN-5150	27
330786	TCN-5750-HM	9	342787	3105	15	356633	3112	22	357702	3112	23	365754	5150	27
330787	TCN-5750-HM	9	342795	3105	15	356634	3112	22	357765	TN-3112	23	366110	5155-M	28
330788	TCN-5750-HM	9	342803	3105	15	356635	TN-3112	22	357769	3112	23	366112	5155-M	28
330789	TCN-5750-HM	9	342811	3105	15	356647	3112	22	357785	3112	23	366120	5155-M	28
330790	TCN-5750-HM	9	342829	3105	15	356662</								

VERMONT TAP & DIE

Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number	Order Number	Style Number	Page Number
366142	5155-M	28	367198	5155	27	368154	5155	28	385760	3182	33	420829	332	36
366150	5155-M	28	367222	5155	27	368341	TN-5155	28	385786	3182	33	420845	336	36
366152	5155-M	28	367228	TN-5155	27	368358	TN-5155	28	385789	TN-3182	33	420860	338	36
366160	5155-M	28	367230	5155	27	384524	3180-E	32	385794	3182	33	420878	339	36
366162	5155-M	28	367236	TN-5155	27	384525	3180-E	32	385810	3182	33	420936	5	36
366170	5155-M	28	367263	5155	27	384526	3180-E	32	385813	TN-3182	33	420944	6	36
366172	5155-M	28	367269	TN-5155	27	384527	3180-E	32	385828	3182	33	420951	7	36
366180	5155-M	28	367271	5155	27	384528	3180-E	32	385844	3182	33	916206	3183	33
366182	5155-M	28	367278	TN-5155	27	384529	3180-E	32	385847	TN-3182	33	916211	3183	33
366307	5150	27	367302	TN-5155	27	385307	3180	32	385851	3182	33	916213	3183	33
366315	5150	27	367305	5155	27	385323	3180	32	385870	TN-3182	33	916216	3183	33
366323	5150	27	367313	5155	27	385328	TN-3180	32	385877	3182	33	916218	3183	33
366329	TN-5150	27	367320	TN-5155	27	385329	TN-3180	32	385885	3182	33	916221	3183	33
366331	5150	27	367321	5155	27	385331	3180	32	385901	3182	33	916223	3183	33
366337	TN-5150	27	367327	TN-5155	27	385356	3180	32	385904	TN-3182	33	916226	3183	33
366360	TN-5150	27	367335	TN-5155	27	385357	TN-3180	32	385919	3182	33	916228	3183	33
366364	5150	27	367339	5155	27	385359	TN-3180	32	385943	3182	33	916231	3183	33
366372	5150	27	367347	5155	28	385364	3180	32	386008	3180-E	32	916233	3183	33
366378	TN-5150	27	367354	5155	28	385380	3180	32	386024	3180-E	32	916236	3183	33
366402	TN-5150	27	367905	TN-5155	28	385385	TN-3180	32	386040	3180-E	32	918827	3105-E	18
366406	5150	27	367909	5155	28	385386	TN-3180	32	386065	3180-E	32	918828	3105-E	18
366410	TN-5150	27	367913	TN-5155	28	385398	3180	32	386129	TN-3180-E	32	918833	3105-E	18
366414	5150	27	367917	5155	28	385409	TN-3180	32	386152	TN-3180-E	32	918834	3105-E	18
366444	TN-5150	27	367921	TN-5155	28	385410	TN-3180	32	386186	TN-3180-E	32	918836	3105-E	18
366448	5150	27	367925	5155	28	385413	3180	32	386210	TN-3180-E	32	918837	3105-E	18
366451	TN-5150	27	367933	5155	28	385422	3180	32	387105	3181	34	918839	3105-E	18
366455	5150	27	367939	TN-5155	28	385443	TN-3180	32	387113	3181	34	918840	3105-E	18
366463	5150	27	367941	5155	28	385444	TN-3180	32	387121	3181	34	918842	3105-E	18
366469	TN-5150	27	367947	TN-5155	28	385448	3180	32	387139	3181	34	918843	3105-E	18
366471	5150	27	367954	TN-5155	28	385455	3180	32	387147	3181	34	918845	3105-E	18
366477	TN-5150	27	367958	5155	28	385458	TN-3180	32	387154	3181	34	918846	3105-E	18
366485	TN-5150	27	367962	TN-5155	28	385471	3180	32	387162	3181	34	918848	3105-E	18
366489	5150	27	367966	5155	28	385477	TN-3180	32	387212	3181-D	34	918849	3105-E	18
366493	TN-5150	27	367970	TN-5155	28	385489	3180	32	387220	3181-D	34	918851	3105-E	18
366497	5150	27	367974	5155	28	385500	TN-3180	32	387238	3181-D	34	918852	3105-E	18
366501	TN-5150	27	367982	5155	28	385501	TN-3180	32	387246	3181-D	34	918854	3105-E	18
366505	5150	27	367988	TN-5155	28	385505	3180	32	387253	3181-D	34	918855	3105-E	18
366513	5150	27	367990	5155	28	385513	3180	32	387261	3181-D	34	918891	3105-E	18
366519	TN-5150	27	367996	TN-5155	28	385534	TN-3180	32	387279	3181-D	34	918892	3105-E	18
366521	5150	27	368006	5155	28	385536	TN-3180	32	400302	2290	35	918930	3112-E	25
366527	TN-5150	27	368014	5155	28	385539	3180	32	400344	2290	35	918932	3112-E	25
366535	TN-5150	27	368022	5155	28	385547	3180	32	403124	280	35	918934	3112-E	25
366538	5150	27	368030	5155	28	385562	3180	32	403132	280	35	918935	3112-E	25
366543	TN-5150	27	368036	TN-5155	28	385570	3180	32	403140	280	35	918936	3112-E	25
366547	5150	27	368038	TN-5155	28	385596	3180	32	403165	280	35	918937	3112-E	25
366550	TN-5150	27	368039	TN-5155	28	385604	3180	32	403173	280	35	918938	3112-E	25
366554	5150	27	368043	TN-5155	28	385620	3180	32	403181	280	35	918939	3112-E	25
366562	5150	27	368048	5155	28	385680	TN-3180	32	403199	280	35	918940	3112-E	25
366568	TN-5150	27	368055	5155	28	385681	TN-3180	32	403223	280	35	918941	3112-E	25
366570	5150	27	368063	5155	28	385682	TN-3180	32	403264	280	35	919700	3183-S	33
366576	TN-5150	27	368069	TN-5155	28	385685	TN-3180	32	403280	280	35	919705	3183-S	33
367107	5155	27	368071	5155	28	385686	TN-3180	32	403306	280	35	919715	3183-S	33
367115	5155	27	368077	TN-5155	28	385687	TN-3180	32	405202	290	35	919725	3183-S	33
367145	TN-5155	27	368089	5155	28	385703	3182	33	405301	290	35	919727	3183-S	33
367149	5155	27	368091	TN-5155	28	385729	3182	33	420522	1852	36	919735	3183-S	33
367152	TN-5155	27	368097	5155	28	385737	3182	33	420548	1853	36	919745	3183-S	33
367156	5155	27	368145	TN-5155	28	385752	3182	33	420555	1857	36	919750	3183-S	33
367180	5155	27	368147	5155	28	385755	TN-3182	33	420803	328	36	919755	3183-S	33
												919765	3183-S	33

INDEX BY ORDER NUMBER

Metalcutting Safety (read this before using VERMONT TAP & DIE products)

Modern metalcutting operations involve high energy, high spindle or cutter speeds, and high temperatures and cutting forces. Hot, flying chips may be projected from the workpiece during metalcutting. Although advanced cutting tool materials are designed and manufactured to withstand the high cutting forces and temperatures that normally occur in these operations, they are susceptible to fragmenting in service, particularly if they are subjected to over-stress, severe impact or otherwise abused. Therefore, precautions should be taken to adequately protect workers, observers and equipment against hot, flying chips, fragmented cutting tools, broken workpieces or other similar projectiles. Machines should be fully guarded and personal protective equipment should be used at all times.

When grinding advanced cutting tool materials, a suitable means for collection and disposal of dust, mist or sludge should be provided. Overexposure to dust or mist containing metallic particles can be hazardous to health particularly if exposure continues over an extended period of time and may cause eye, skin and mucous membrane irritation and temporary or permanent respiratory disease. Certain existing pulmonary and skin conditions may be aggravated by exposure to dust or mist. Adequate ventilation, respiratory protection and eye protection should be provided when grinding and workers should avoid breathing of and prolonged skin contact with dust or mist.

General Industry Safety and Health Regulations, Part 1910. U.S. Department of Labor, published in Title 29 of the Code of Federal Regulations should be consulted. Obtain from VERMONT TAP & DIE and read the applicable Material Safety Data Sheet before grinding.

Cutting tools are only one part of the worker-machine-tool system. Many variables exist in machining operations, including the metal removal rate; the workpiece size, shape, strength and rigidity; the chucking and fixturing; the load carrying capability of centers; the cutter and spindle speed and torque limitations; the holder and boring bar overhang; the available power; and the condition of the tooling and the machine. A safe metalcutting operation must take all of these variables, and others, into consideration.

VERMONT TAP & DIE has no control over the end use of its products or the environment into which those products are placed. VERMONT TAP & DIE urges that its customers adhere to the recommended standards of use of their metalcutting machines and tools, and that they follow procedures that ensure safe metalcutting operations. The information included throughout this catalog under the heading "Technical Data" and other recommendations on machining practices referred to herein are only advisory in nature and **do not** constitute representations or warranties and are not necessarily appropriate for any particular work environment or application.

VERMONT TAP & DIE



Greenfield Industries Inc.

2501 Davis Creek Road, Seneca, SC 29678

Customer Service:

telephone 800.348.2885 • fax 800.892.4290

Email: greenfield.information@gfii.com

International Sales:

telephone 706.863.7708 • fax 706.860.8559

Technical Support:

telephone 800.892.4281 • fax 706.892.4290

©2009 Greenfield Industries, Inc., Seneca, SC USA

All rights reserved. Catalog Number VTD2010

Distributed by: